



# Product Specification

XBLW MC34063

1.5A Step-Up/Down/Inverting Switching Regulator


WEB | [www.xinboleic.com](http://www.xinboleic.com)



## Descriptions

The XBLW MC34063 is a monolithic control circuit containing the primary functions required for DC-to-DC converters. This device consists of an internal temperature compensated reference (1.25V), comparator, controlled duty cycle oscillator with an active current limit circuit, driver and high current output switch. The IC is specifically designed to be used in Step-Down and Step-Up and Voltage-Inverting applications with a minimum number of external components.

The XBLW MC34063 is available in DIP8 and SOP8 package.

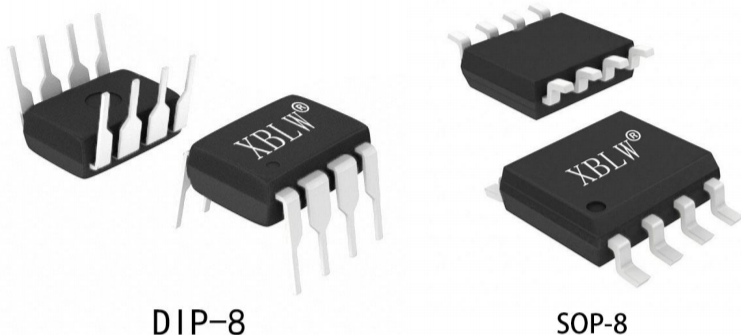


## Feature

- Current Limiting
- Low Standby Current
- Precision 2% Reference
- Output Voltage Adjustable
- Output Switch Current to 1.5A
- Frequency Operation to 100kHz
- Operation from 3.0V to 40V Input

## Applications

- ADSL Modems
- Battery Chargers
- NICs / Switches / Hubs
- Negative Voltage Power Supplies


## Functional Block Diagram

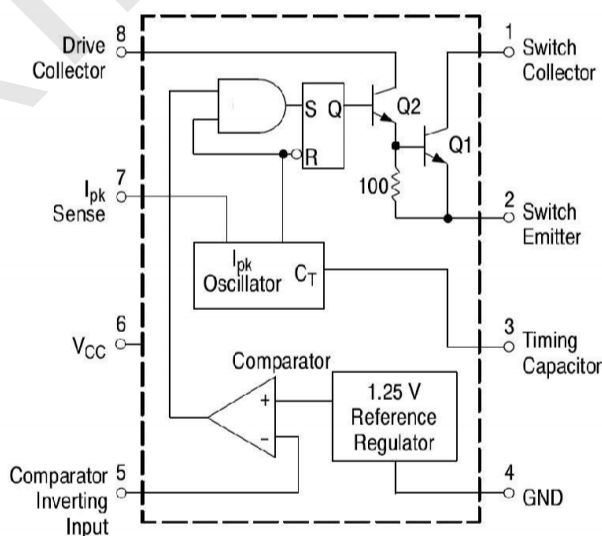

## Ordering Information

| Product Model    | Package Type | Marking   | Packing | Packing Qty  |
|------------------|--------------|-----------|---------|--------------|
| XBLW MC34063AN   | DIP-8        | MC34063AN | Tube    | 2000pcs/Box  |
| XBLW MC34063ADTR | SOP-8        | MC34063A  | Tape    | 2500pcs/Reel |

## Pin Configuration

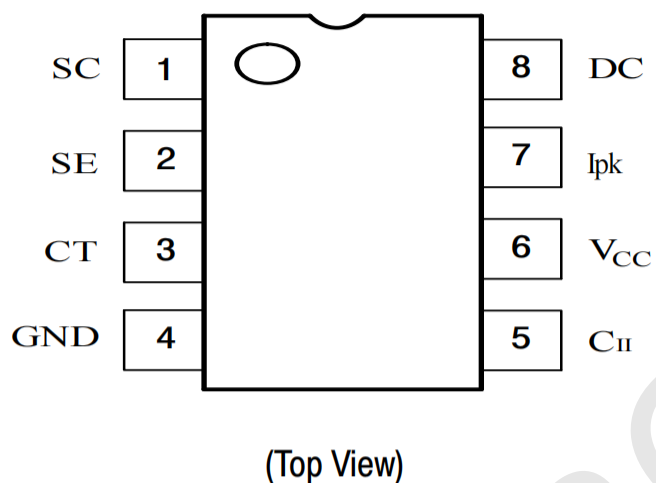

## Pin Description

| Pin Number | Pin Name | Function Description | Pin Number | Pin Name        | Function Description       |
|------------|----------|----------------------|------------|-----------------|----------------------------|
| 1          | SC       | Switch collector     | 5          | CII             | Comparator inverting input |
| 2          | SE       | Switch emitter       | 6          | V <sub>CC</sub> | Input voltage              |
| 3          | CT       | Timing capacitor     | 7          | I <sub>pk</sub> | I <sub>pk</sub> sense      |
| 4          | GND      | Ground               | 8          | DC              | Drive collector            |

## Absolute Maximum Ratings (Ta=25°C)


| Parameter Name                      |      | Symbol                  | Value   | Unit |
|-------------------------------------|------|-------------------------|---------|------|
| Power Supply Voltage                |      | V <sub>CC</sub>         | 40      | V    |
| Comparator Input Voltage Range      |      | V <sub>IR</sub>         | -0.3~40 | V    |
| Switch Collector Voltage            |      | V <sub>C(switch)</sub>  | 40      | V    |
| Switch Emitter Voltage (VPin1=40V)  |      | V <sub>E(switch)</sub>  | 40      | V    |
| Switch Collector to Emitter Voltage |      | V <sub>CE(switch)</sub> | 40      | V    |
| Driver Collector Voltage            |      | V <sub>C(drive)</sub>   | 40      | V    |
| Driver Collector Current            |      | I <sub>C(drive)</sub>   | 100     | mA   |
| Switch Current                      |      | I <sub>SW</sub>         | 1.5     | A    |
| Power Dissipation                   | DIP8 | P <sub>D</sub>          | 1.25    | W    |
|                                     | SOP8 |                         | 625     | mW   |
| Operating Ambient Temperature Range |      | T <sub>a</sub>          | 0 ~ 70  | °C   |
| Storage Temperature Range           |      | T <sub>stg</sub>        | -65~150 | °C   |

## Electrical Characteristics


(Unless otherwise noted ,Vcc=5.0V,Ta=25°C)

| Parameter Name                                                                                | Symbol               | Min   | Typ  | Max   | Unit |
|-----------------------------------------------------------------------------------------------|----------------------|-------|------|-------|------|
| <b>OSCILLATOR</b>                                                                             |                      |       |      |       |      |
| Frequency (Vpin5=0V,CT=1.0nF, Ta=25°C)                                                        | fosc                 | 24    | 33   | 42    | kHz  |
| Charge Current (Vcc=5.0~40V, Ta=25°C)                                                         | Ichg                 | 24    | 35   | 42    | μA   |
| Discharge Current (Vcc=5.0~40V, Ta=25°C)                                                      | Idischg              | 140   | 220  | 260   | μA   |
| Discharge to Charge Current Ratio<br>(Pin7 to Vcc, Ta=25°C)                                   | Idischg/Ichg         | 5.2   | 6.5  | 7.5   |      |
| Current limit Sense Voltage<br>(Ichg=Idischg, Ta=25°C)                                        | Vipk(sense)          | 250   | 300  | 350   | mA   |
| <b>OUTPUT SWITCH</b>                                                                          |                      |       |      |       |      |
| Saturation Voltage, Darlington Connection<br>(ISW=1.0A, Pins 1,8 Connected)                   | V <sub>CE(sat)</sub> |       | 1.0  | 1.3   | V    |
| Saturation Voltage, Darlington Connection<br>(ISW=1.0A, Rpin 8=82Ω to Vcc, Forced β ≈ 20)     | V <sub>CE(sat)</sub> |       | 0.45 | 0.7   | V    |
| DC Current Gain (ISW=1.0A,VCE=5.0V, Ta=25°C)                                                  | hFE                  | 50    | 75   |       |      |
| Collector Off-State Current (VCE=40V)                                                         | Ic(off)              |       | 0.01 | 100   | μA   |
| <b>COMPARATOR</b>                                                                             |                      |       |      |       |      |
| Threshold Voltage (Ta=25°C)                                                                   | V <sub>th</sub>      | 1.225 | 1.25 | 1.275 | V    |
| Threshold Voltage (Ta=0~70°C)                                                                 |                      | 1.21  |      | 1.29  |      |
| Threshold Voltage Line Regulation<br>(Vcc=3.0~40V)                                            | Regline              |       | 1.4  | 5.0   | mV   |
| Input Bias Current(Vin=0V)                                                                    | I <sub>IB</sub>      |       | -20  | -400  | nA   |
| <b>TOTAL DEVICE</b>                                                                           |                      |       |      |       |      |
| Supply Current (Vcc=5.0~40V, CT=1.0nF,<br>Pin7=Vcc, Vpin5>Vth, pin2=Gnd, Remaining Pins Open) | I <sub>cc</sub>      |       |      | 4.0   | mA   |


## Characteristics Curves

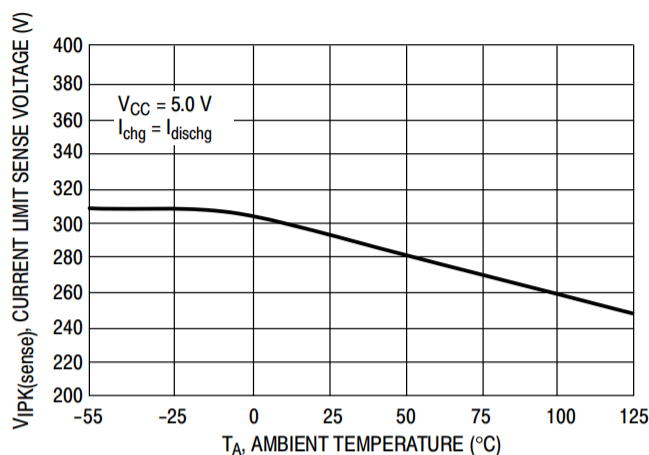


Current Limit Sense Voltage  
versus Temperature

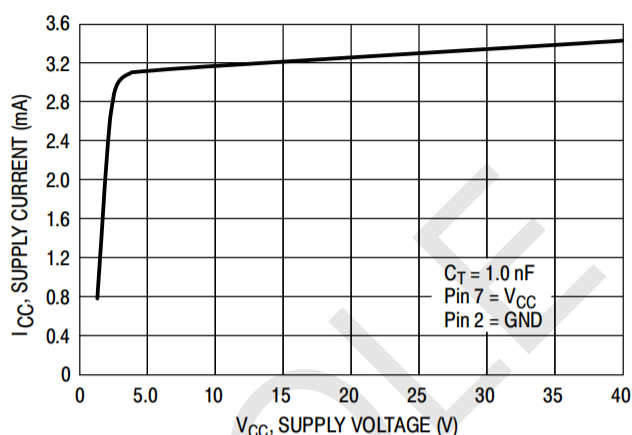


Standby Supply Current versus  
Supply Voltage

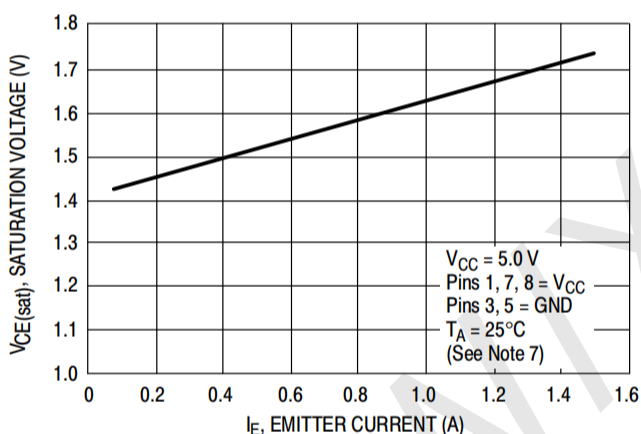


Emitter Follower Configuration Output  
Saturation Voltage versus Emitter Current

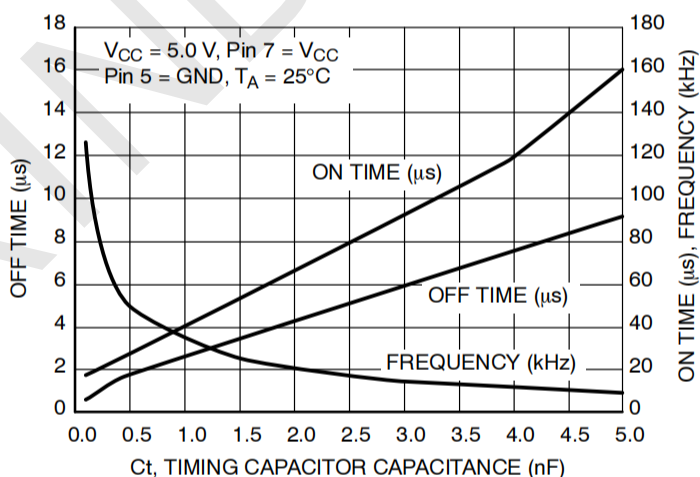

Oscillator Frequency

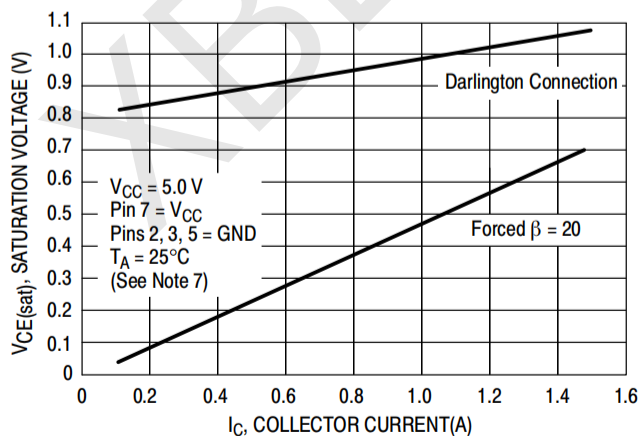


Common Emitter Configuration Output  
Switch Saturation Voltage versus  
Collector Current

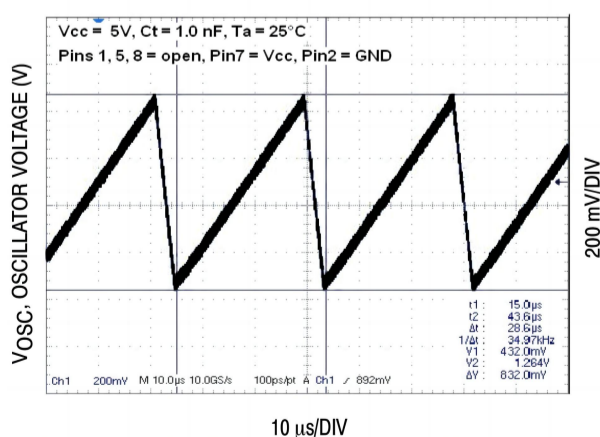

Timing Capacitor Waveform


Typical Application

1. Step-Up Converter

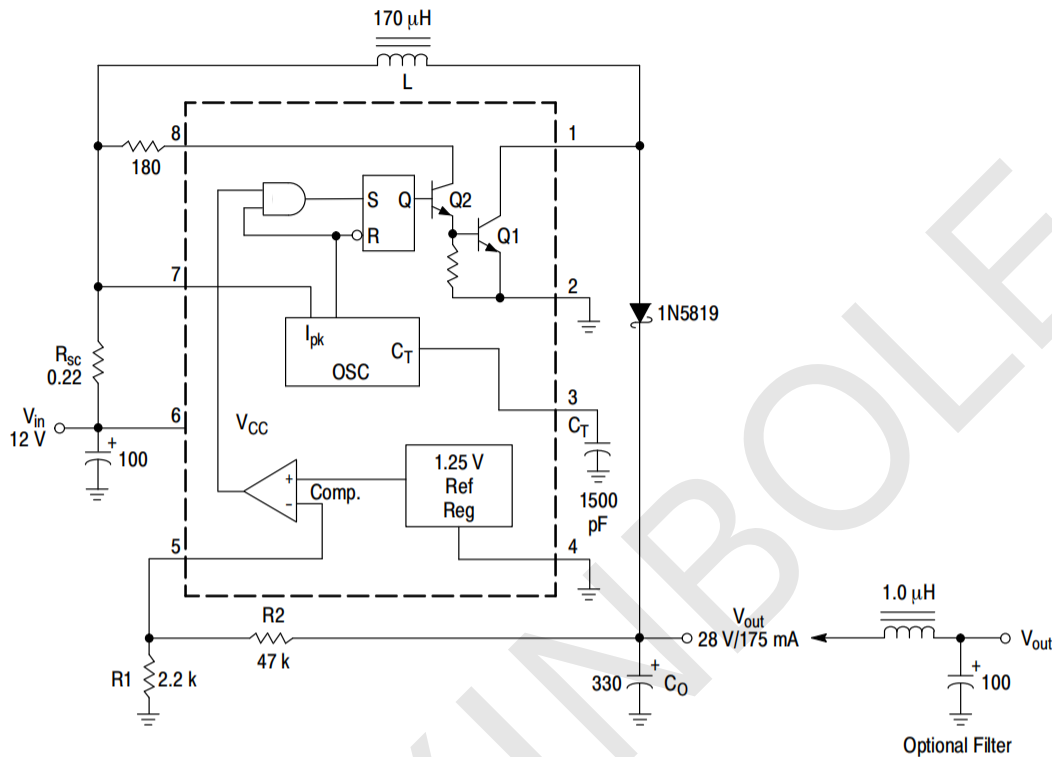


| Test                               | Conditions                          | Results            |
|------------------------------------|-------------------------------------|--------------------|
| Line Regulation                    | $V_{in}=8.0V\sim 16V$ , $I_o=175mA$ | $30mV=\pm 0.05\%$  |
| Load Regulation                    | $V_{in}=12V$ , $I_o=75mA\sim 175mA$ | $10mV=\pm 0.017\%$ |
| Output Ripple                      | $V_{in}=12V$ , $I_o=175mA$          | $400mV_{pp}$       |
| Efficiency                         | $V_{in}=12V$ , $I_o=175mA$          | $87.7\%$           |
| Output Ripple With Optional Filter | $V_{in}=12V$ , $I_o=175mA$          | $40mV_{pp}$        |

2. Step-Down Converter

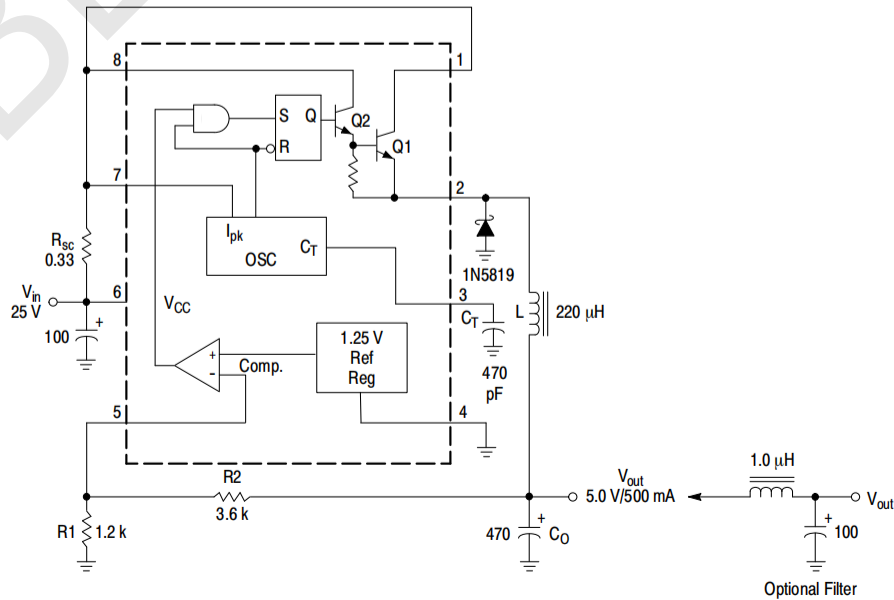

| Test                               | Conditions                          | Results            |
|------------------------------------|-------------------------------------|--------------------|
| Line Regulation                    | $V_{in}=15V\sim 25V$ , $I_o=500mA$  | $12mV=\pm 0.12\%$  |
| Load Regulation                    | $V_{in}=25V$ , $I_o=50mA\sim 500mA$ | $3.0mV=\pm 0.03\%$ |
| Output Ripple                      | $V_{in}=25V$ , $I_o=500mA$          | $120mV_{pp}$       |
| Short Circuit Current              | $V_{in}=25V$ , $R_L=0.1\Omega$      | $1.1A$             |
| Efficiency                         | $V_{in}=25V$ , $I_o=500mA$          | $83.7\%$           |
| Output Ripple With Optional Filter | $V_{in}=25V$ , $I_o=500mA$          | $40mV_{pp}$        |

### 3. Voltage Inverting Converter

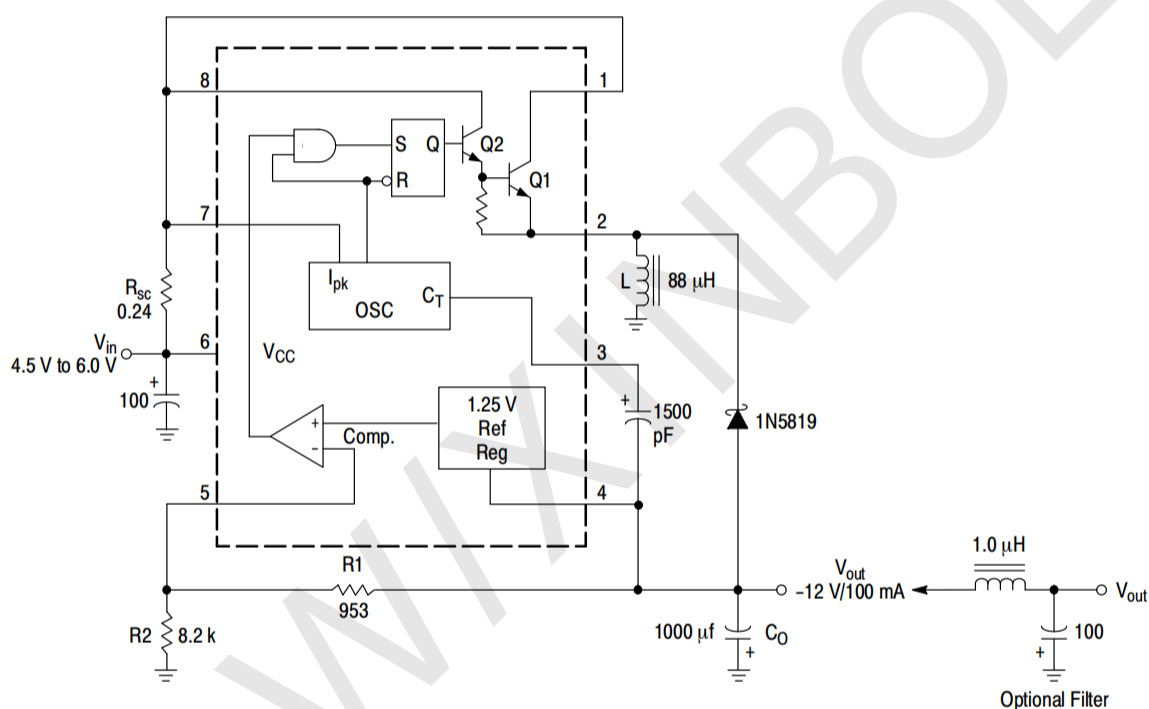

| Test                               | Conditions                           | Results             |
|------------------------------------|--------------------------------------|---------------------|
| Line Regulation                    | $V_{in}=4.5V\sim 6.0V$ , $I_o=100mA$ | $3.0mV=\pm 0.012\%$ |
| Load Regulation                    | $V_{in}=5.0V$ , $I_o=10mA\sim 100mA$ | $0.022V=\pm 0.09\%$ |
| Output Ripple                      | $V_{in}=5.0V$ , $I_o=100mA$          | $500mV_{pp}$        |
| Short Circuit Current              | $V_{in}=5.0V$ , $R_L=0.1\Omega$      | $910mA$             |
| Efficiency                         | $V_{in}=5.0V$ , $I_o=100mA$          | $62.2\%$            |
| Output Ripple With Optional Filter | $V_{in}=5.0V$ , $I_o=100mA$          | $70mV_{pp}$         |

## Application Information

| Calculation          | Step-Up                                                                     | Step-Down                                                                             | Voltage-Inverting                                                           |
|----------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| $t_{on}/t_{off}$     | $\frac{V_{out} + V_F - V_{in(min)}}{V_{in(min)} - V_{sat}}$                 | $\frac{V_{out} + V_F}{V_{in(min)} - V_{sat} - V_{out}}$                               | $\frac{ V_{out}  + V_F}{V_{in} - V_{sat}}$                                  |
| $(t_{on} + t_{off})$ | $\frac{1}{f}$                                                               | $\frac{1}{f}$                                                                         | $\frac{1}{f}$                                                               |
| $t_{off}$            | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                       | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                                 | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                       |
| $t_{on}$             | $(t_{on} + t_{off}) - t_{off}$                                              | $(t_{on} + t_{off}) - t_{off}$                                                        | $(t_{on} + t_{off}) - t_{off}$                                              |
| $C_T$                | $4.0 \times 10^{-5} t_{on}$                                                 | $4.0 \times 10^{-5} t_{on}$                                                           | $4.0 \times 10^{-5} t_{on}$                                                 |
| $I_{pk(switch)}$     | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                   | $2I_{out(max)}$                                                                       | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                   |
| $R_{sc}$             | $0.3/I_{pk(switch)}$                                                        | $0.3/I_{pk(switch)}$                                                                  | $0.3/I_{pk(switch)}$                                                        |
| $L_{(min)}$          | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat} - V_{out})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ |
| $C_O$                | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                   | $\frac{I_{pk(switch)}(t_{on} + t_{off})}{8V_{ripple(pp)}}$                            | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                   |

$V_{sat}$  = Saturation voltage of the output switch

$V_F$  = Forward voltage drop of the output rectifier

**The following power supply characteristics must be chosen:**

$V_{in}$  — Nominal input voltage

$V_{out}$  — Desired output voltage ,  $|V_{out}| = 1.25 \times \left( 1 + \frac{R_2}{R_1} \right)$

$I_{out}$  — Desired output current


$f_{min}$  — Minimum desired output switching frequency at the selected values of  $V_{in}$  and  $I_o$

$V_{ripple(pp)}$  — Desired peak-to-peak output ripple voltage. In practice, the calculated capacitor value will need to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly affect the line and load regulation.

## Package Information


### • DIP-8

| Symbol | Size | Dimensions In Millimeters |          | Symbol | Size | Dimensions In Inches |          |
|--------|------|---------------------------|----------|--------|------|----------------------|----------|
|        |      | Min (mm)                  | Max (mm) |        |      | Min (in)             | Max (in) |
| A      |      | 3.710                     | 4.310    | A      |      | 0.146                | 0.170    |
| A1     |      | 0.510                     |          | A1     |      | 0.020                |          |
| A2     |      | 3.200                     | 3.600    | A2     |      | 0.126                | 0.142    |
| B      |      | 0.380                     | 0.570    | B      |      | 0.015                | 0.022    |
| B1     |      | 1.524 (BSC)               |          | B1     |      | 0.060 (BSC)          |          |
| C      |      | 0.204                     | 0.360    | C      |      | 0.008                | 0.014    |
| D      |      | 9.000                     | 9.400    | D      |      | 0.354                | 0.370    |
| E      |      | 6.200                     | 6.600    | E      |      | 0.244                | 0.260    |
| E1     |      | 7.320                     | 7.920    | E1     |      | 0.288                | 0.312    |
| e      |      | 2.540 (BSC)               |          | e      |      | 0.100 (BSC)          |          |
| L      |      | 3.000                     | 3.600    | L      |      | 0.118                | 0.142    |
| E2     |      | 8.400                     | 9.000    | E2     |      | 0.331                | 0.354    |

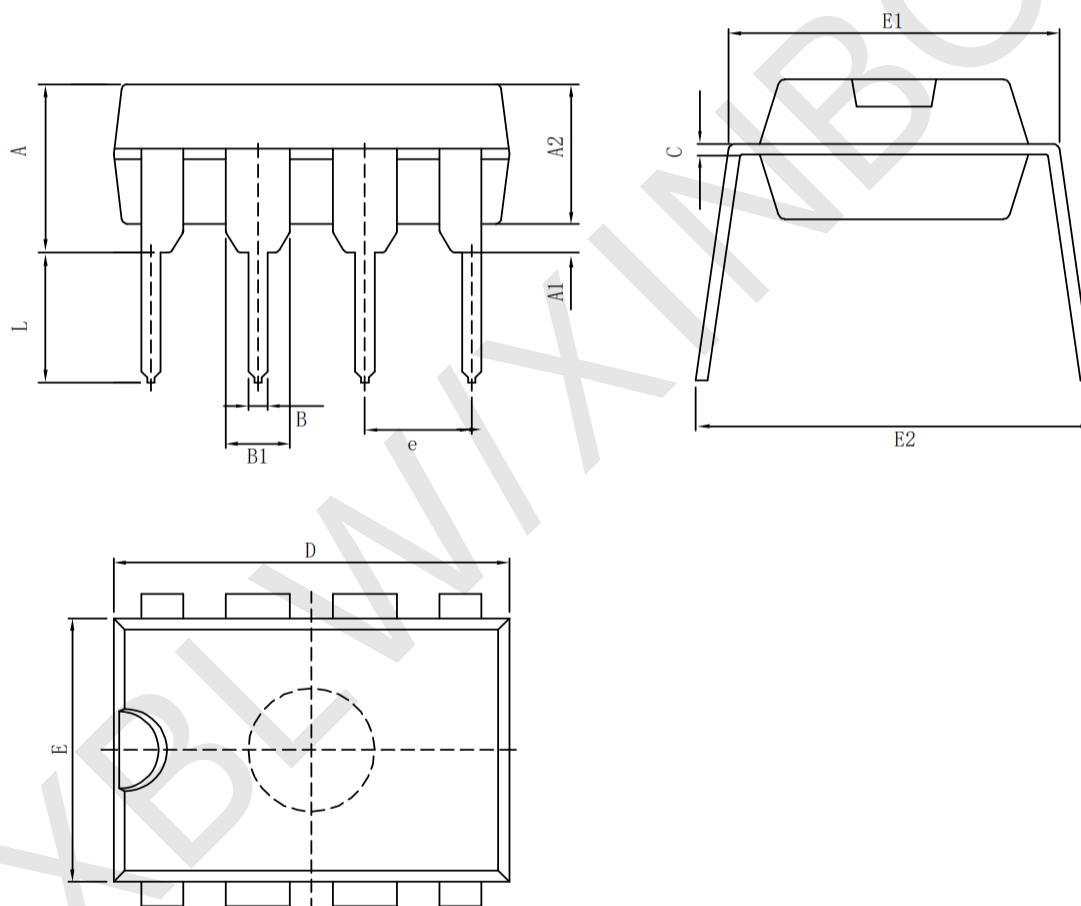

• SOP-8

| Symbol | Dimensions In Millimeters |          | Symbol | Dimensions In Inches |          |
|--------|---------------------------|----------|--------|----------------------|----------|
|        | Min (mm)                  | Max (mm) |        | Min (in)             | Max (in) |
| A      | 1.350                     | 1.750    | A      | 0.053                | 0.069    |
| A1     | 0.100                     | 0.250    | A1     | 0.004                | 0.010    |
| A2     | 1.350                     | 1.550    | A2     | 0.053                | 0.061    |
| b      | 0.330                     | 0.510    | b      | 0.013                | 0.020    |
| c      | 0.170                     | 0.250    | c      | 0.006                | 0.010    |
| D      | 4.700                     | 5.100    | D      | 0.185                | 0.200    |
| E      | 3.800                     | 4.000    | E      | 0.150                | 0.157    |
| E1     | 5.800                     | 6.200    | E1     | 0.228                | 0.224    |
| e      | 1.270 (BSC)               |          | e      | 0.050 (BSC)          |          |
| L      | 0.400                     | 1.270    | L      | 0.016                | 0.050    |
| θ      | 0°                        | 8°       | θ      | 0°                   | 8°       |

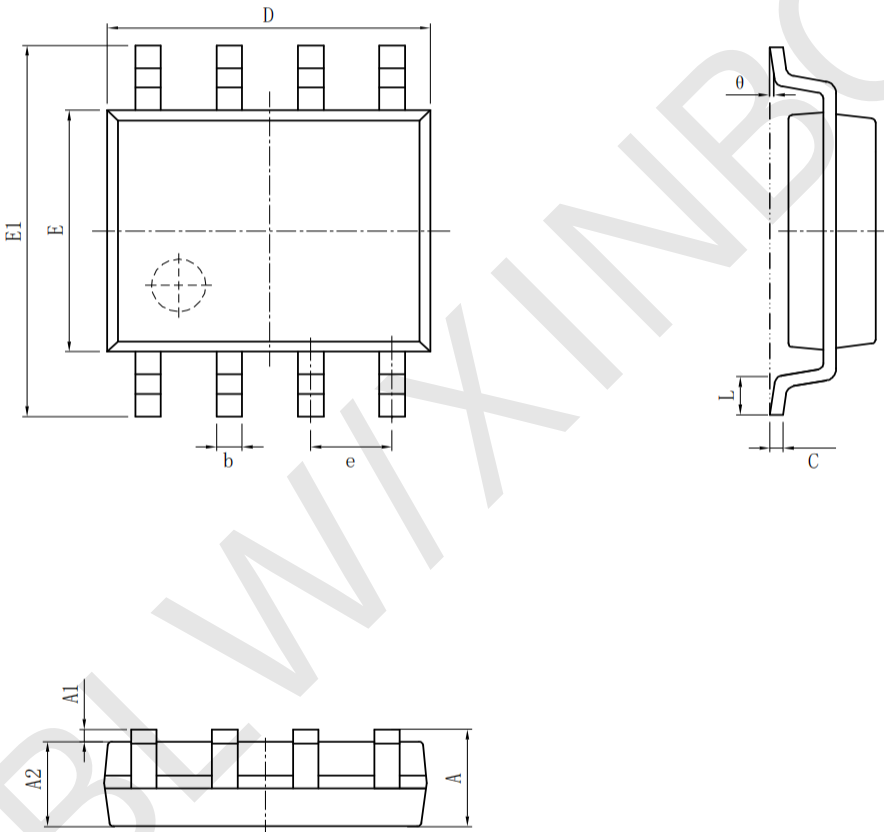

## Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.