
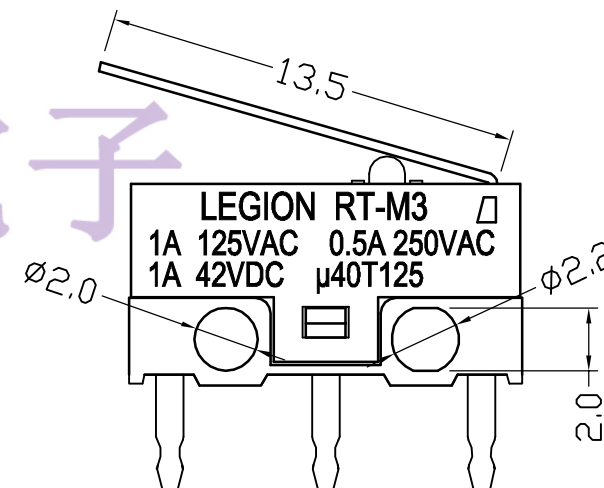
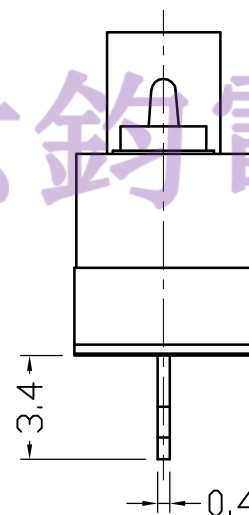


NOTES:

1. RATING: 1A 125VAC (UL, CUL; CQC)
0.5A 250VAC (UL, CUL; CQC)
1A 42VDC (UL, CUL; CQC)
2. OPERATING FORCE: 30 ± 20 gf
3. CONTACT RESISTANCE: $< 500 \text{m}\Omega$
4. INSULATION RESISTANCE: $> 100 \text{M}\Omega$ (500VDC BETWEEN OPEN CONTACTS)
5. DIELECTRIC STRENGTH: $> 500 \text{VAC}$ 0.5mA 1 MINUTE

TEL: 0769-82310511-867

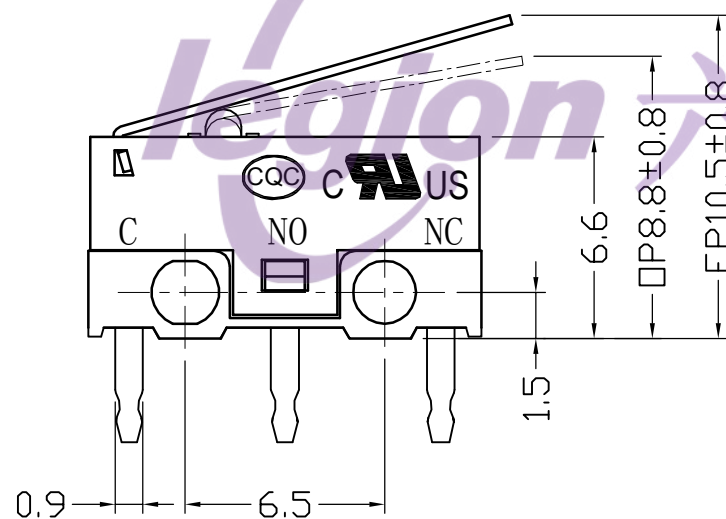

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN LMC 2020.10.29	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE					SCALE	NO		
3	→	8	→	X	±0.30					MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	→	6	→	X.XX	±0.10					RT-M3-16B3P10A030-A		*****	AO
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.							