
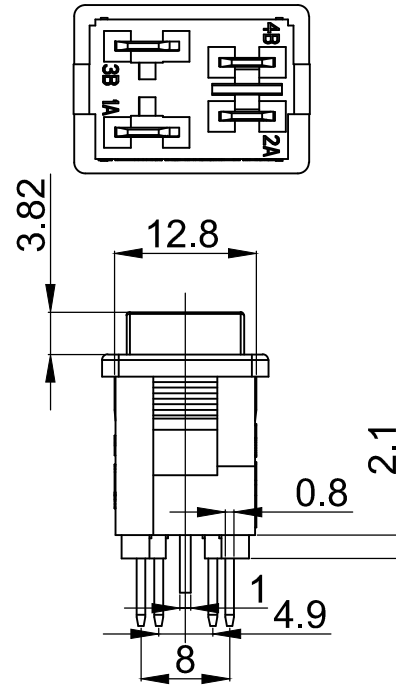
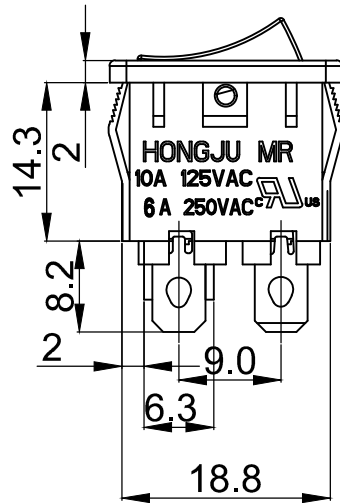




MR-6

受控文件

Rating: 10A 125V AC (UL CUL)  US6A 250V AC (UL CUL TUV) 



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1



MATERIAL:

Body:Nylon66,UL rated:94V-0 min

Actuator:Nylon66,UL rated:94V-0 min

Terminal:Brass,silver or tin plated

X	0	1	2	4	5	6	7
Marking	None	•	ON OFF	— ○	! ○	OFF ON	开关

公差 TOLEANCES				.X± 0.3 .XX± 0.2		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.		
版本 VERSION				A1	比例尺 SCALE	NONE	日期 DATE	2021.3.15	品名 TITLE	图号 DRAWING NO
A1	重新整理后发行	2014.07.15	N/A	核准	核对	Z.H.B.	绘图		MR-6-210-C5N-BB (B-01)	MR-6-210-C5N-BB_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Z.H.B.	DRAWN BY			