


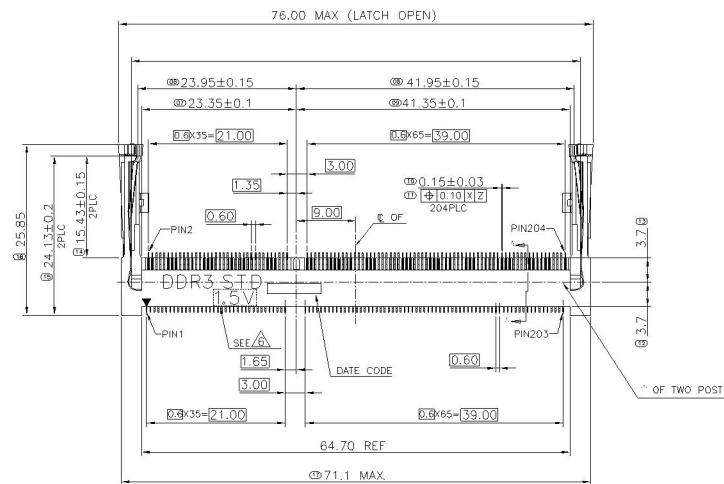


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A			INITIAL RELEASE	2013.07.24	Liushifeng
B			CHANGE PART NUMBER DESCRIPTION	2013.09.03	Liushifeng

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0;
COLOR: BLACK.
 - 1.2 CONTACTS: COPPER ALLOY
 - 1.3 LATCH: STAINLESS STEEL
 - 1.4 FLOATING PEG: STAINLESS STEEL
2. FINISH:
 - 2.1 CONTACT:
GOLD FLASH PLATED ON CONTACT AREA AND GOLD 2u"
SOLDER AREA. 50u" MIN. NICKEL UNDERPLATING.
 - 2.2 FLOATING PEG:
GOLD FLASH PLATED ON SOLDERING AREA.
50u" MIN. NICKEL UNDERPLATING.
3. REFLOW SOLDER CAPABLE TO 260°C.
4.  SHOULD BE MEASURED BY CPK
5. MADE  DIMENSIONS NEED BE CONTROLLED IN FAI.



TABLE


40-42044-204X6RHF	Au 30u"
40-42044-204X5RHF	Au 20u"
40-42044-204X4RHF	Au 15u"
40-42044-204X3RHF	Au 10u"
40-42044-204X2RHF	Au 5u"
40-42044-204X1RHF	GOLD FLASH
NUMBER	PLATED(TERMINAL)

DIM	TOL	DIM	TOL
x.	± 0.30	x.	$\pm 2^\circ$
.x	± 0.25	.x	$\pm 1^\circ$
.xx	± 0.15		

深圳市连欣科技有限公司

CUSTOMER DRAWING		DATE	TITLE: DDR SO DIMM 5.2H STD ASSY	
6	DESIGN:	Liushifeng	2013.09.03	PART NO: XDP-4042044-20401
	CHECK:			
	APPROVAL:	Linzongbiao	2013.09.03	
		SHEET: 1/4		
		SCALE: 1:1		UNIT: mm

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A			INITIAL RELEASE	2013.07.24	Liushifeng
B	△B		CHANGE PART NUMBER DESCRIPTION	2013.09.03	Liushifeng

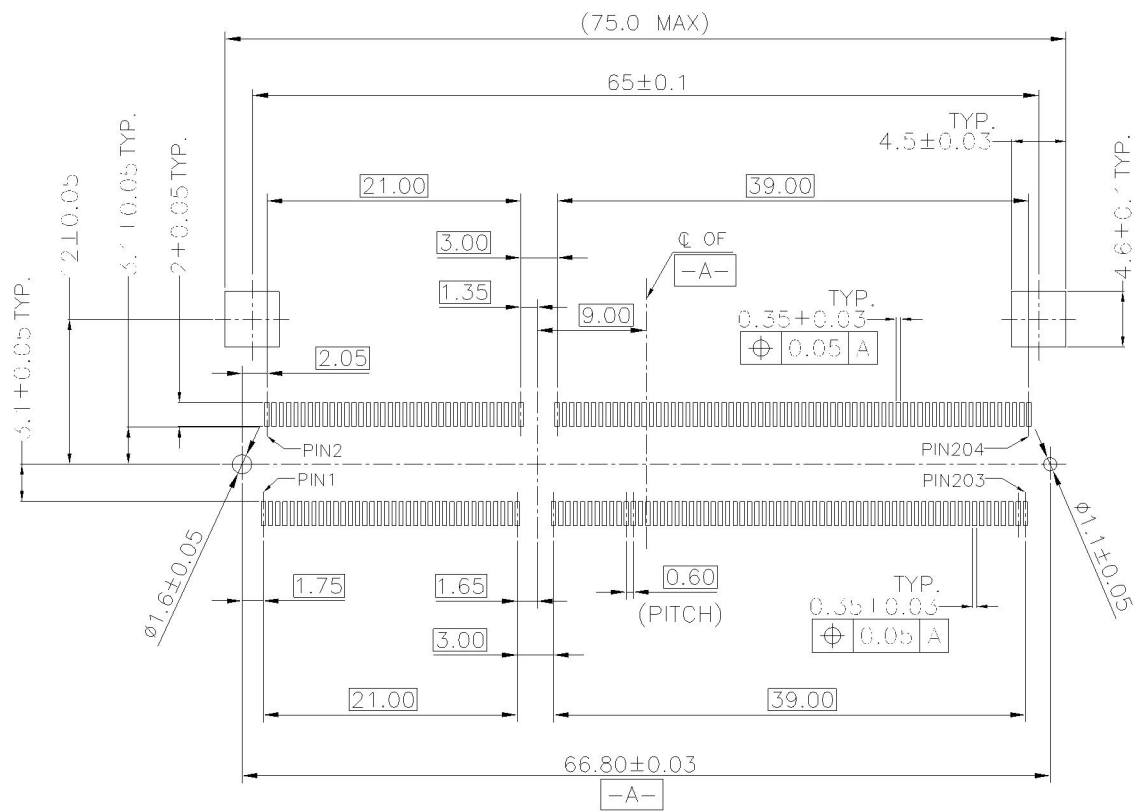

RECOMMENDED PCB LAYOUT


STANDARD TYPE

DIM	TOL	DIM	TOL
.x.	±0.30	.x.	±2°
.x	±0.25	.x	±1°
.xx	±0.15		


深圳市连欣科技有限公司			
CUSTOMER DRAWING		DATE	TITLE: DDR SO DIMM PCB
DRAW NO.	DESIGN:	Liushifeng	PART NO: XDA P-4042044-20401
T-11-0081	CHECK:		SHEET: 2/4
REV. B	APPROVAL:	Linzongbiao	SCALE: 1:1 UNIT: mm
		2013.09.03	

1 2 3 4 5 6 7 8


A

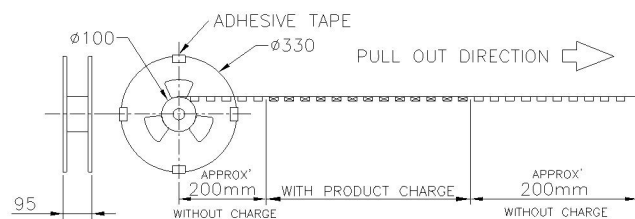

B

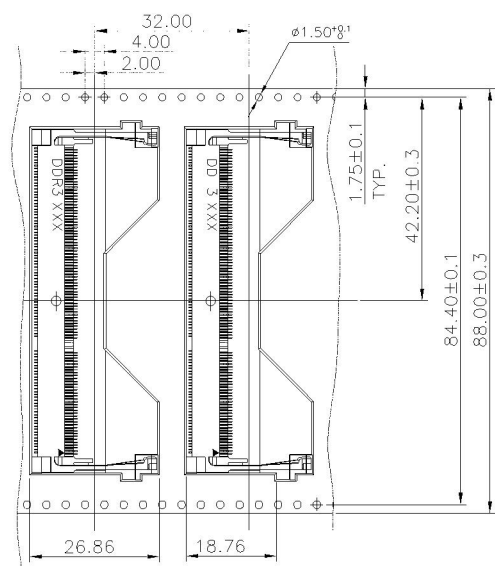

D

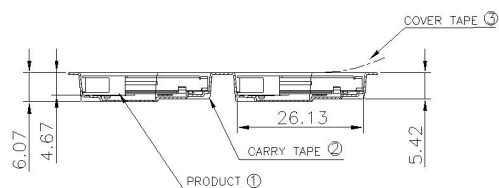

E

4.320KG	2.195KG	250	2
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ CARTON

DIM	TOL	DIM	TOL
x	±0.30	x	±2°
.x	±0.25	.x	±1°
.xx	±0.15		

DRAWING NO. T-11-0081				REV. B			
DESIGN: Liushifeng				CHECK: Linzongbio			
APPROVAL: Linzongbio				DATE: 2013.09.03			
TITLE: DDR SO DIMM 5.2H ASS'Y PACKING				SHEET: 4/4			
SCALE: 1:1				UNIT: mm			

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A			INITIAL RELEASE	2013.07.24	Liushifeng
B		B	CHANGE PART NUMBER DESCRIPTION	2013.09.03	Liushifeng

- NOTES : (FOR TAPE & REEL)
PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET DEREN CONTROLLED SUBSTANCES SPEC.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED:5 PPM.
* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM (COMBINED).
* CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-B.
- MATERIAL :
COVER TAPE : ANTISTATIC P.S, COLOR: TRANSPARENT COLOR.
CARRIER TAPE : POLYSTYRENES.
REEL : POLYSTYRENES.
CARTON: CORRUGATED FIBER.
 - QUANTITY : SEE TABLE
 - WEIGHT : SEE TABLE
 - PEELING RESISTANCE : 10gf~100gf (for 8mm)
10gf~130gf (for 12mm~56mm)
10gf~150gf (for 72mm)
 - PEELING SPEED : 300mm/MINUTES

A

B

C

D

E

