

4

3

2

1

D

D

C






C

B



B

A

A

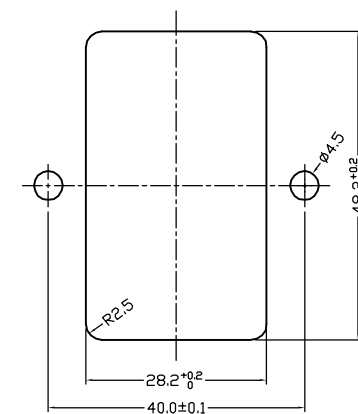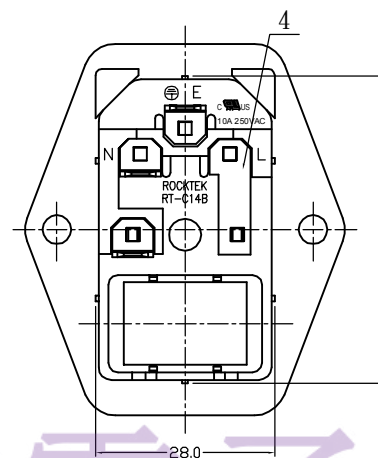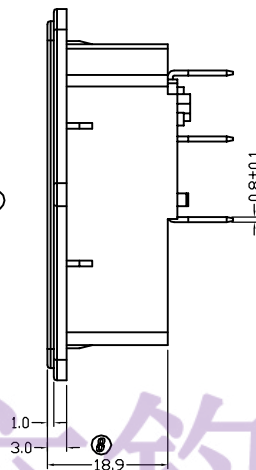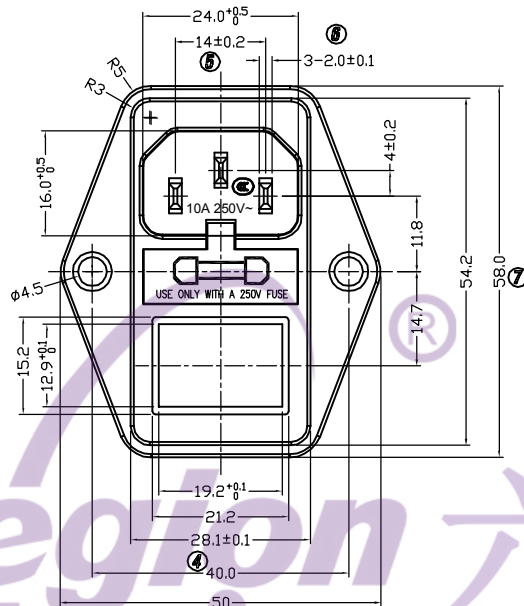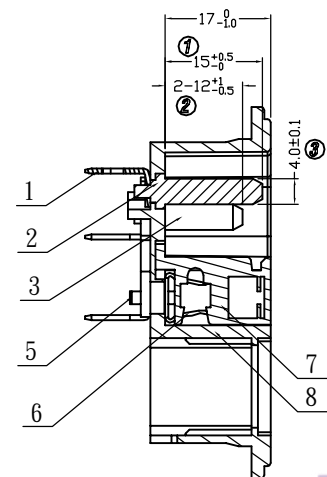

PANEL CUT-OUT

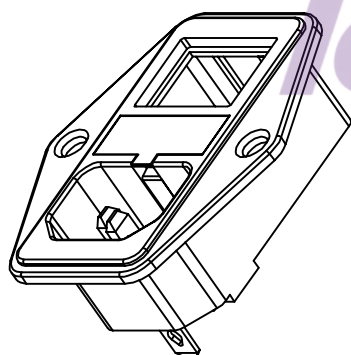

NOTES:

1. Rating: 10A 125/250VAC CUL;CCC
2. CONTACT RESISTANCE: 50mΩ Max
3. INSULATION RESISTANCE: 100MΩ Min, at 500VDC
4. WITHSTAND VOLTAGE: 2000VAC 0.5mA 1 minute

电话: 0769-82310511-867

邮箱: hooya89@hooya.hk

8	本体	PA66	1
7	盖子	PA66	1
6	3#端子	C2680 1/2H Ag-plating	2
5	3#PIN	C1100 1/2H Ag-plating	2
4	连接片	C2680 1/2H Tin-plating	1
3	2#PIN	C2680 1/2H Ni-plating	2
2	1#PIN	C2680 1/2H Ni-plating	1
1	1#端子	C2680 1/2H Tin-plating	3
NO.	PART NAME	MATERIAL	Q' TY

NO	DESCRIPTION	NO	DESCRIPTION	DIMENSIONAL TOLERANCES	APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	DRAWING NO.	REV.
5		10		RANGE					SCALE	NO		
4		9		X					MAT'L	***		
3		8		X.X					MATERIAL NO.			
2		7		X.XX								
1		6		ANGLES								
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES								

LEGION ELECTRONIC & HARDWARE CO., LTD.

LMC
2019.05.20

RT-C14B-H00-13-R

WIF119108

A0