

MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

MPS2733-1

产品手册

描述

MPS2733-1 是一款小型贴片的光耦产品，适用于表面贴片组装。MPS2733-1 由砷化镓红外发光二极管与带积分基极-发射极电阻的达林顿光电晶体管组成的高压光电耦合器，VCEO 达到 300V 以上。


特性

- 集电极-发射极电压:300V (Min.)
- 电流传输比 1000%(Min.)
- 输入-输出隔离电压 Viso=3750Vrms (min.)

应用领域

- 开关电源，智能仪表
- 工业控制，测量仪器
- 复印机等办公设备
- 家用电器：如空调、风扇、热水器等。

封装信息及内部引脚配置

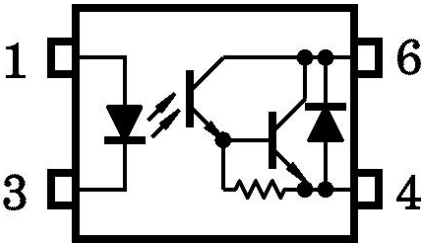封装	引脚配置	管体标记
 SOP-4	 1: ANODE 3: CATHODE 4: EMITTER 6: COLLECTOR	

订单信息

型号	封装	最小包装
MPS2733-1	SOP-4	3000

极限参数 (Ta=25℃

参数		符号	额定值	单位
输入端	正向电流	IF	50	mA
	正向电流温飘	ΔIF /℃	-0.7 (Ta≥53℃)	mA/℃
	正向脉冲电流	IFP	1 (100 μs pulse, 100pps)	A

参数		符号	额定值	单位
	反向电压	V_R	6	V
	结温	T_J	125	°C
输出端	输出端功耗	P_C	150	mW
	输出电流	I_C	150	mA
	集电极-发射极电压	V_{CEO}	300	V
	发射极-集电极电压	V_{ECO}	0.3	V
	结温	T_J	125	°C
	输出端功耗降额 ($T_a \geq 25^\circ\text{C}$)	$\Delta P_C / ^\circ\text{C}$	-1.5	mW / °C
总功耗		P_T	200	mW
隔离电压		Viso	3750 (AC, 1min., R.H. $\leq$ 60%)	Vrms
工作温度		T_{opr}	-55 ~ +110	°C
储存温度		T_{stg}	-55 ~ +125	°C
焊接温度		T_{sol}	260 (10s)	°C
总功耗降额 ($T_a \geq 25^\circ\text{C}$)		$\Delta P_T / ^\circ\text{C}$	-2.0	mW / °C

光电特性 ($T_a = 25^\circ\text{C}$)

参数		符号	条件	最小	典型	最大	单位
输入	正向电压	V_F	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	反向电流	I_R	$V_R = 5\text{V}$			10	μA
	终端电容	C_T	$V = 0, f = 1\text{kHz}$	-	30	-	pF
输出	集电极暗电流	I_{CEO}	$V_{CE} = 200\text{V}$	-	10	200	nA
			$V_{CE} = 200\text{V}, T_a = 85^\circ\text{C}$	-	-	20	μA
	集电极-发射极击穿电压	$V_{(BR)CEO}$	$I_C = 0.1\text{mA}, I_F = 0$	300			V
	发射极-集电极击穿电压	$V_{(BR)ECO}$	$I_E = 0.1\text{mA}, I_F = 0$	0.3			V
	电容(集电极 to 发射极)		C_{CE}	$V = 0, f = 1\text{MHz}$		12	pF

耦合的电特性 ($T_a = 25^\circ\text{C}$)

参数	符号	条件	最小	典型	最大	单位
电流传输比 (CTR)	I_C/I_F	$I_F = 1\text{mA}, V_{CE} = 1\text{V}$	1000	4000	-	%
饱和电流传输比 (CTR)	$I_C/I_{F(SAT)}$	$I_F = 10\text{mA}, V_{CE} = 1\text{V}$	500	-	-	%
饱和压降	$V_{CE(sat)}$	$I_C = 10\text{mA}, I_F = 1\text{mA}$	-	-	1.0	V
		$I_C = 100\text{mA}, I_F = 10\text{mA}$	0.3		1.2	

隔离特点 (Ta =25℃)

参数	符号	条件	最小	典型	最大	单位
电容(输入到输出)	C _S	V _S = 0, f = 1 MHz	-	0.8	-	pF
隔离电阻	R _S	V _S = 500 V, R.H. ≤ 60%	5 × 10 ¹⁰	10 ¹⁴	-	Ω
隔离电压	BV _S	AC, 1 minute	3750	-	-	Vrms
		AC, 1 second, in oil	-	5000	-	
		DC, 1 minute, in oil	-	5000	-	Vdc

开关特性 (Ta =25℃)


参数	符号	条件	最小	典型	最大	单位
上升时间	t _r	V _{CC} = 10 V, I _C = 10 mA R _L = 100 Ω	-	40	-	μs
下降时间	t _f		-	15	-	
打开时间	t _{on}		-	50	-	
关断时间	t _{off}		-	15	-	
打开时间	t _{ON}	R _L = 180 Ω (Fig.1) V _{CC} = 10 V, I _F = 16 mA	-	5	-	μs
存储时间	t _s		-	40	-	
关断时间	t _{OFF}		-	80	-	







推荐的操作条件





参数	符号	最小	典型	最大	单位
工作电压	V _{CC}	-	-	200	V
正向电流	I _F	-	16	25	mA
输出电流	I _C	-	-	120	mA
工作温度	T _{opr}	-25	-	85	℃




注:建议的操作条件是作为获得器件预期性能的设计指南。此外，每个项目分别是一个独立的准则。在开发设计使用该产品时，请参考本文制定的参数规格

Fig. 1开关时间测试电路

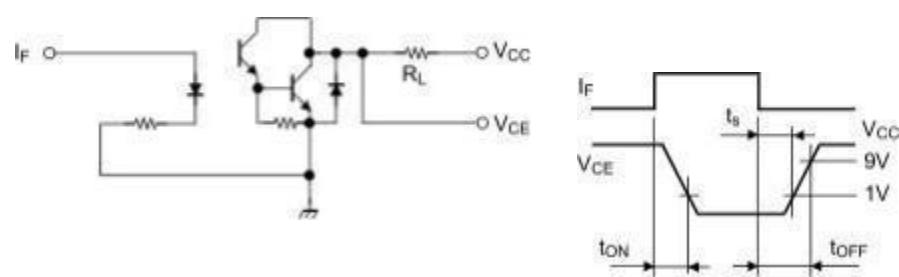


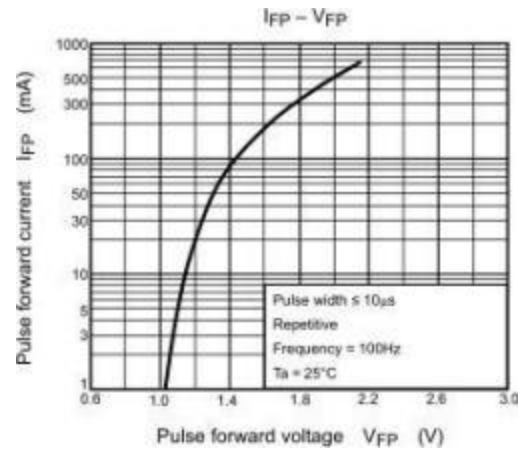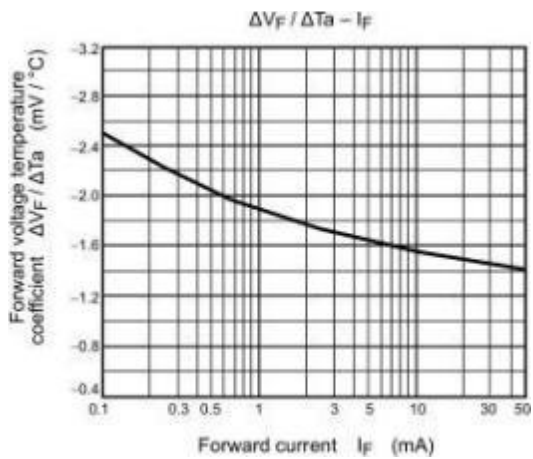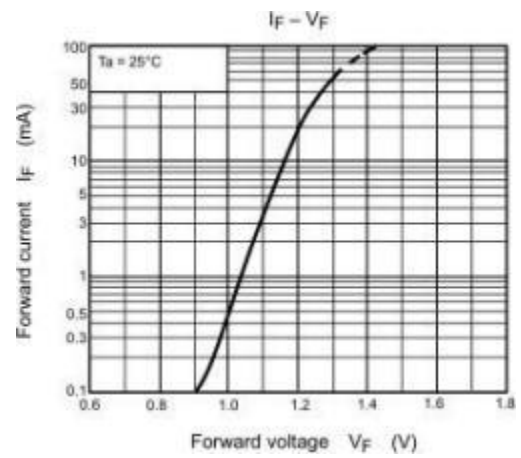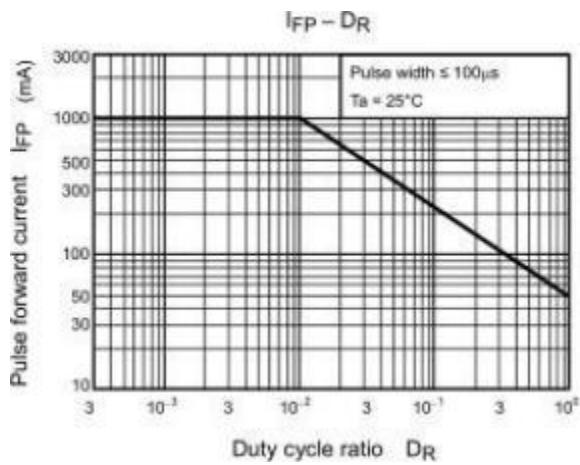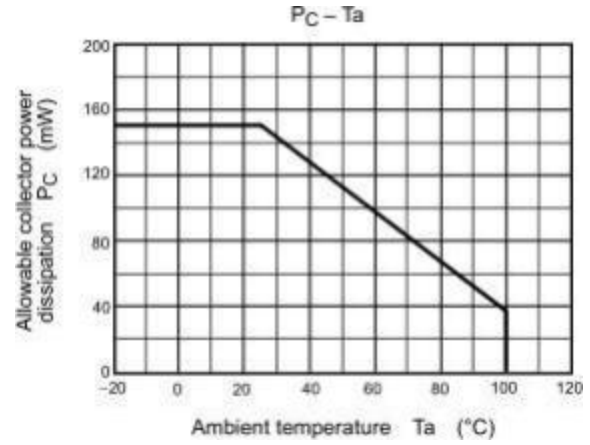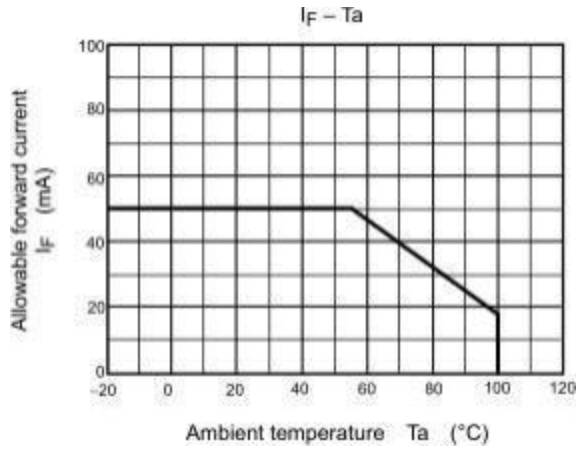

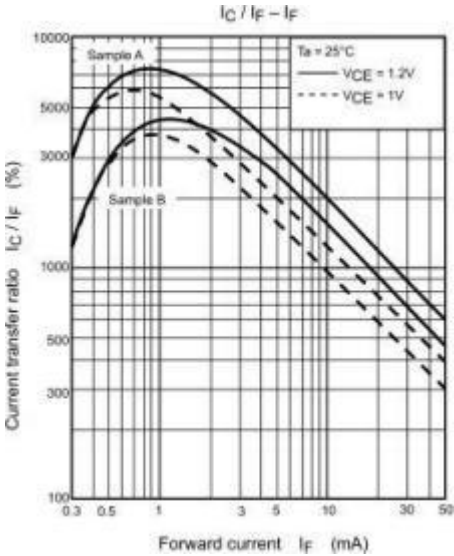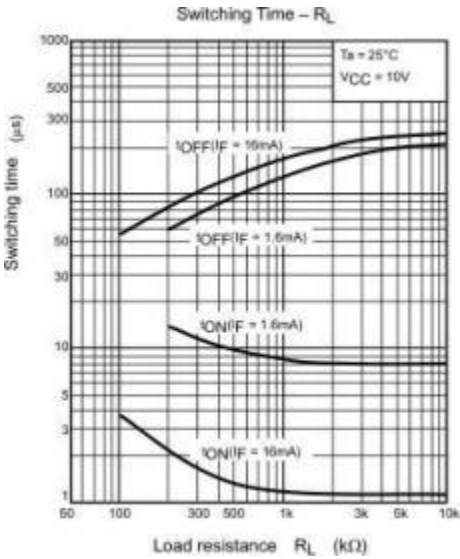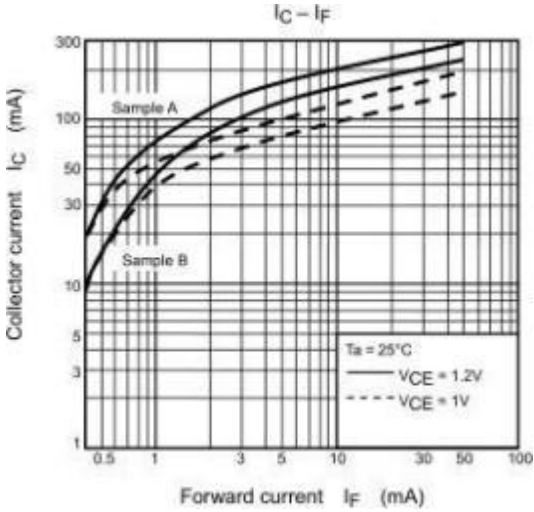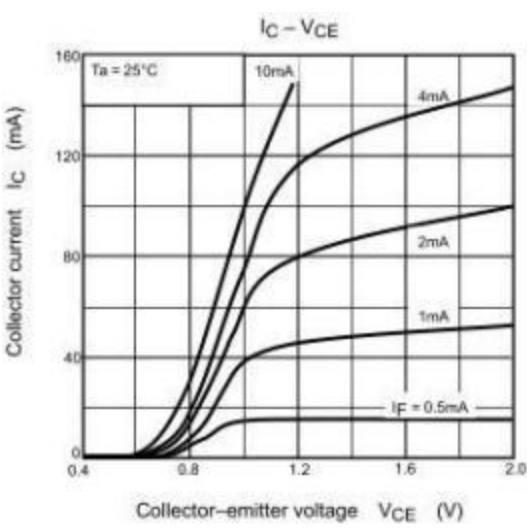


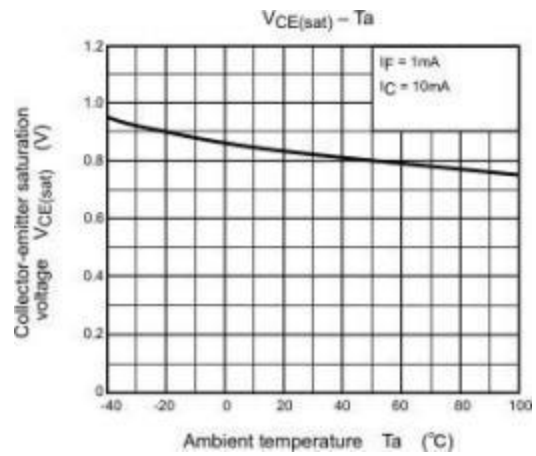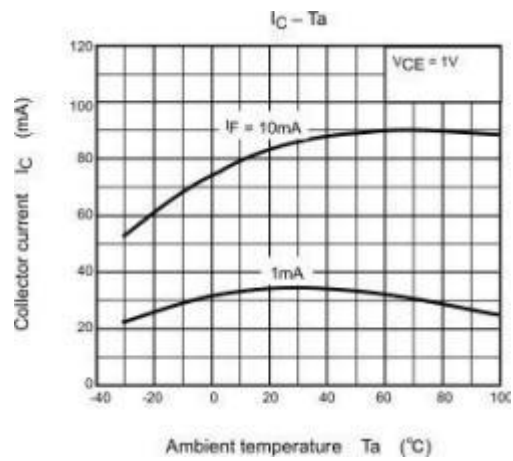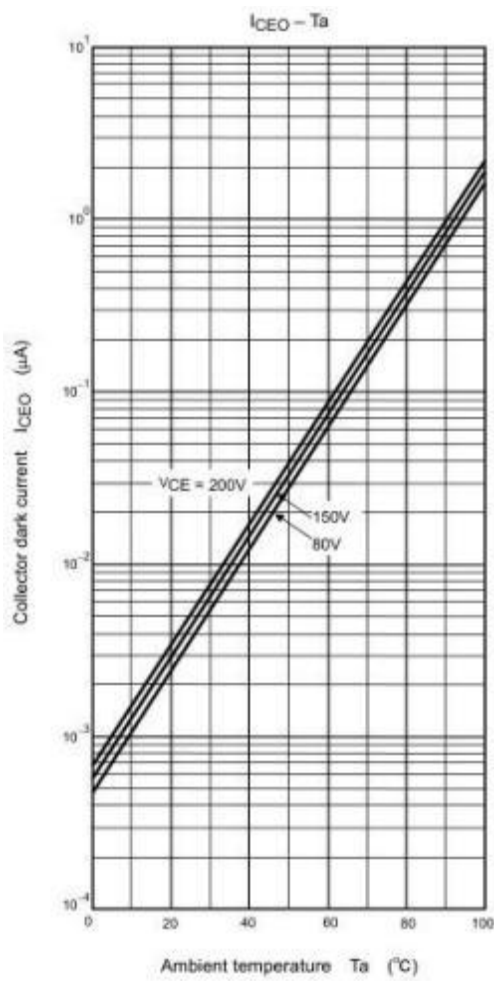

回流焊曲线

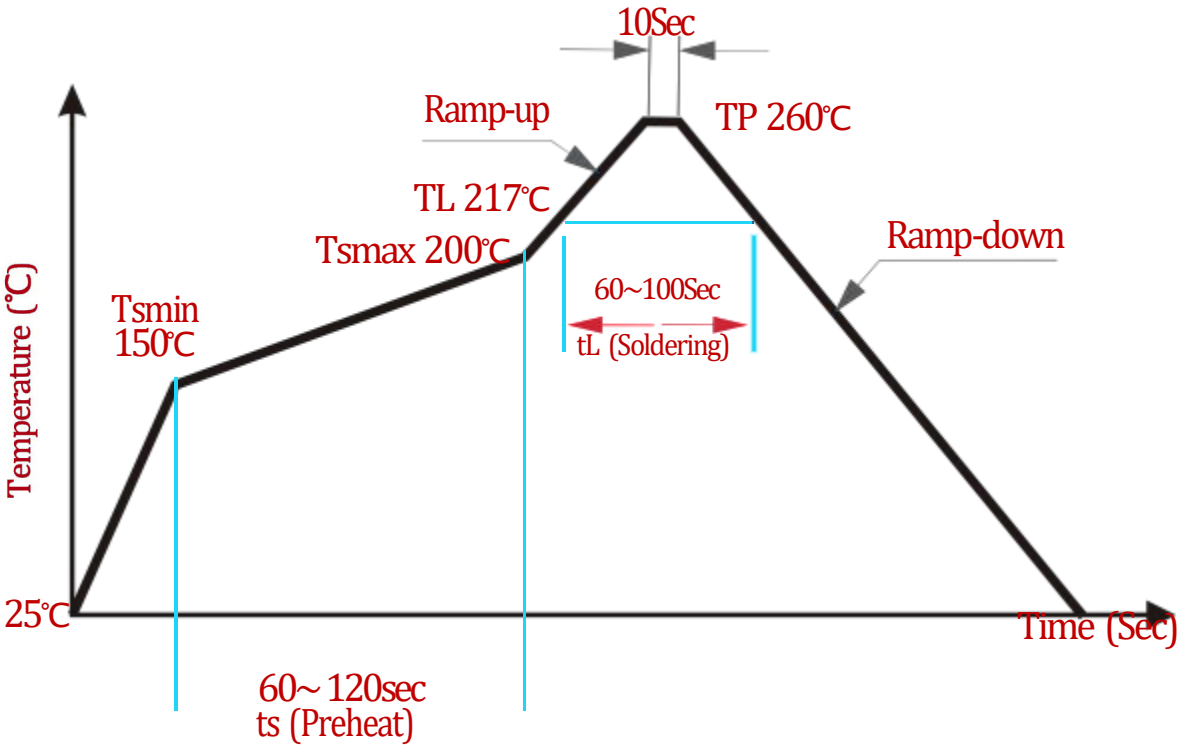

外形尺寸

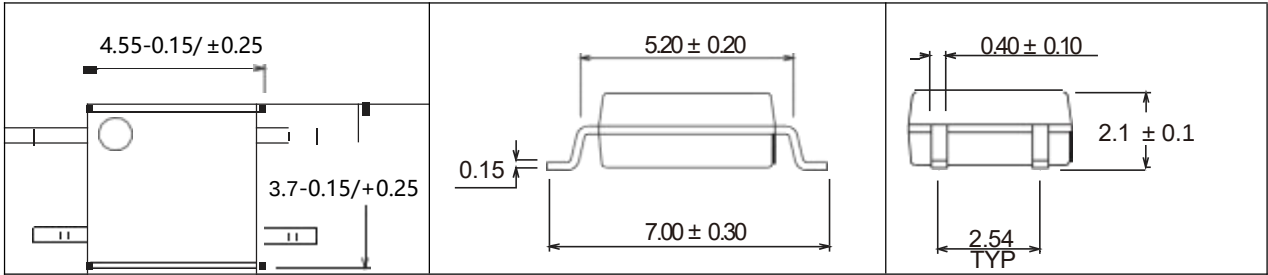

Attention

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specification of any and all MSKSEMI Semiconductor products described or contained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.