
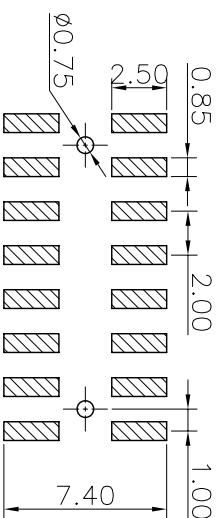
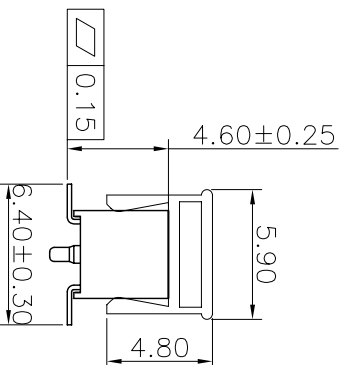
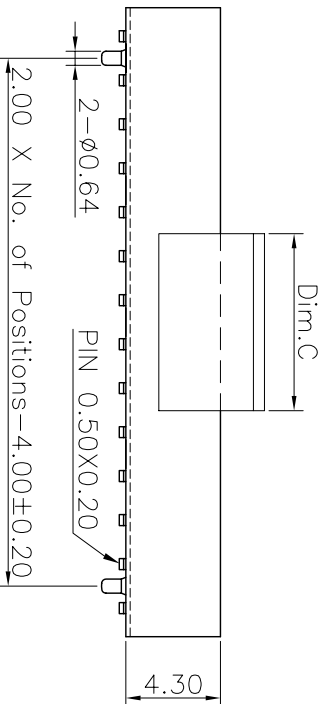



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.05.04	李芳忠

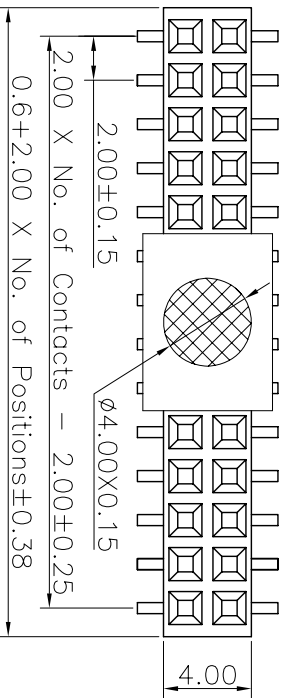

Ordering Information

C SFC208 - XX XX B 031 R 1 A X


No. of Pins per Row
03~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
E=CAP+Tube
F=CAP+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

Dim.C	NOTE
4.00	03~08PIN
8.05	09~40PIN

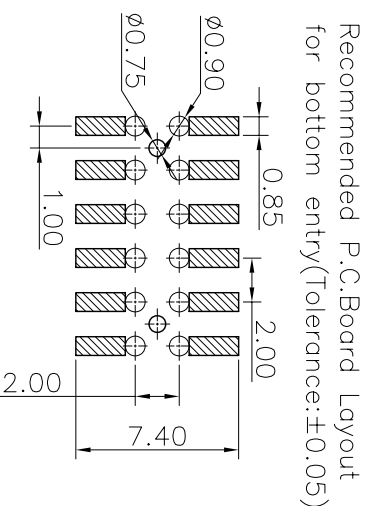

Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free) or the equivalent material

All materials must meet Greenconn requirement for environment protection.

Recommended P.C.Board Layout
(Tolerance:±0.05)

REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1		GENERAL TOLERANCE
					X.±5.0°
					.X.±3.0°
					.XX±2.0°
					.XXX±1.0°

DESIGN: 李芳忠	DATE: 2013.05.04
CHECKED: 劉北平	DATE: 2013.05.04
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	CSCFC208-CB31RA
PART NO.	CSCFC208-XXXX B031R1AX

TITLE.	2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
--------	---