

承认书

APPROVAL SHEET

RoHS

客户名称
Customer Name:

客户料号
Customer P/N:

客户机种
Customer Product:

客户确认回复 Customer Approval	☐ 合格 PASSED	☐ 不合格 REJECTED
不合格原因 Reasons for the rejected		
确认人 Confirm By		日期 Date

供应商: 东莞市长泰尔电子有限公司
SUPPLIER: DONG GUAN CHANG TAI ER ELECTRONIC., LTD.

产品类别:
Part Category

编码器

产品料号:
Part Number

ED08C030-FE18D9.0-A16-1033X

产品摘要:
Part Note

Country origin of CHINA

 长泰尔	 ISO9001:2015/ISO14001:2015	 014	承办 Prepared By	品质 审核 Quality By	工程 审核 Engineering By	工程 核准 Approved By
	 16949:2016	 RoHS符合				


东莞工厂 DONG GUAN FACTORY	泉州办事处 QUANZHOU OFFICE
地址: 广东省东莞市厚街镇白濠工业区世纪路18号 Add:NO.18.Century Road ,Baihao Industrial Area, HouJie Town,Dongguan City,Guangdong Province,China. TEL: 0769-83085666、Dir:85911465、83085818、83085838 FAX: 0769-85911497、83085777 Http://www.changtaier.com E-mail:webmaster@changtaier.com	地址: 福建省泉州市丰泽区东湖街道浔埔社区双江工业大楼A栋3楼 Add:Floor 3 ,Buid A,Shuang Jiang Industrial Edifice,Xu Pu Community,Dong Hu Street, Feng Ze Borough ,QuanZhou City, Fujian Province. TEL: 0595-22221511 TAC:13489209470 FAX: 0595-22251511

编码器规格书

ENCODER SPECIFICATIONS

1 一般事项 General information	
1-1 适用型号 Applicable models	ED08C 系列 ED08C Series
1-2 使用环境温度 Usage environment temperature	- 20℃ ~ + 70℃
1-3 保存环境温度 Storage environment temperature	- 40℃ ~ + 70℃
1-4 测试条件 Test condition	温度: 5~35℃, 湿度: 45~85%HR Temperature:5~35℃, Moisture:45~85%HR
1-5 环保要求 Environmental requisition	本产品符合 RoHS 指令 This product is compliant with RoHS Directive
1-6 耐焊接热 Soldering heat-resistance	1、手工焊接温度最高 350℃±5℃, 3 秒; 2、自动焊接温度最高 260℃±5℃, 3 秒; 基板表面预热温度最高 100℃1 分钟以内; 3、以上过程均保证在 1 到 2 次; 4、不适用回流焊。 1. Soldering iron Max ,350℃±5℃ at 3 sec. 2. Auto soldering 260℃±5℃ max. at 3 sec. Preheating temperature of board surface: 100℃ max. at within 1 minutes. 3. To guarantee the above process at 1 or 2 times. 4. No apply the reflow soldering.
1-7 原产地 Country of origin	中国 China
2 构造 Construction	
2-1 外观 Appearance	各部件应完整, 无锈蚀、裂痕、电镀不良 Every part should finished, be not exist rust flaw crack and bad plating
2-2 寸法 Measurements	依照图面规定 Under conditions prescribed by design drawing.
3 机械性能 Mechanical characteristics	
3-1 全回转角度 Total rotational angle	300° ±5°
3-2 回转力矩 Rotational torque	100~400gf.cm (旋转速度: 60° /1 秒) 100~400gf.cm (Rotational velocity : 60° /1 Sec.)
3-3 回转止动强度 Rotational stopper strength	3Kgf.cm
3-4 定位数 Number of detent	16 个定位 16 Detents
3-5 切换角度 Change-Over angle	20° ±3°

3-6	轴压引强度 Pull-Push Strength of Shaft	≥10Kgf		
3-7	螺母锁紧强度 Nut tightening strength	≥10Kgf.cm		
3-8	轴摇晃度 Shaft wobble	在单个轴顶端施加压力 250gf, 轴径向偏移量小于: 0.7*轴长 L 尺寸/30mm On the tip of the single shaft exert pressure 250gf , Shaft radial deviant be smaller than:0.7*shaft long L size/30mm		
4 电气性能 Electrical characteristics				
4-1	额定电压 Voltage rating	DC 5V		
4-2	额定电流 Current rating	1mA		
4-3	耐电压 Voltage proof	AC 300V 1 分钟以上 (端子和本体之间, 端子和轴芯之间) 1 Minute at AC 300V (Between terminal – case, Between terminal –shaft).		
4-4	最大使用电流 Maximum operating current	2.5mA		
4-6	绝缘抵抗 Insulation resistance	DC 250V 100M Ω 以上 (端子和本体之间, 端子和轴芯之间) 100M Ω min. At DC 250V (Between terminal – case, Between terminal –shaft).		
4-7	回转寿命 Rotational life	☒ 10,000 cycles ☐ 30,000 cycles 无负荷状态以每小时 600 周旋转, 达到寿命后: On the without load status according to the 600 r/h rotation, after achieve the life: 1、接触抵抗 1K Ω 以下; Contact resistance:1K Ω max. 2、绝缘抵抗 10M Ω 以上 DC250V (端子和本体之间, 端子和轴芯之间); Insulation resistance:10M Ω min. At DC 250V. (Between terminal – case, Between terminal –shaft). 3、耐电压 AC100V 1 分钟 (端子和本体之间, 端子和轴芯之间), 绝缘抵抗无击穿; Withstanding voltage : AC 100V at 1 minute (Between terminal – case, Between terminal –shaft). No subversion on insulation resistance. 4、回转力矩: 满足第 3-2 项; Rotational torque : Content item No. 3-2. 5、外观和结构无损坏。 No damage on appearance and structure		
5 防水性能 Waterproof standard characteristics				
6-1	防水标准 Waterproof standard	☒ 不适用 No apply ☐ 七级防水 编码器轴芯轴套置于水中 1 米深处, 其它部件密封后暴露在标准大气压中, 30 分钟后电位器内部未进水。 Grade -7 Of Waterproof standard Encoder's Shaft and Bush in water 1M deep, other component sealed after exposed to the standard atmosphere, after 30 minutes no water into the Encoder's inner.		
东莞市长泰尔电子有限公司 DONG GUAN CHANG TAI ER ELECTRONIC CO., LTD.		制 作 Designed By	审 核 Checked By	核 准 Approved By
		 工程部 2019.07.30 谢敏	 工程部 2019.07.30 喻钊	 工程部 2019.07.30 彭先炎

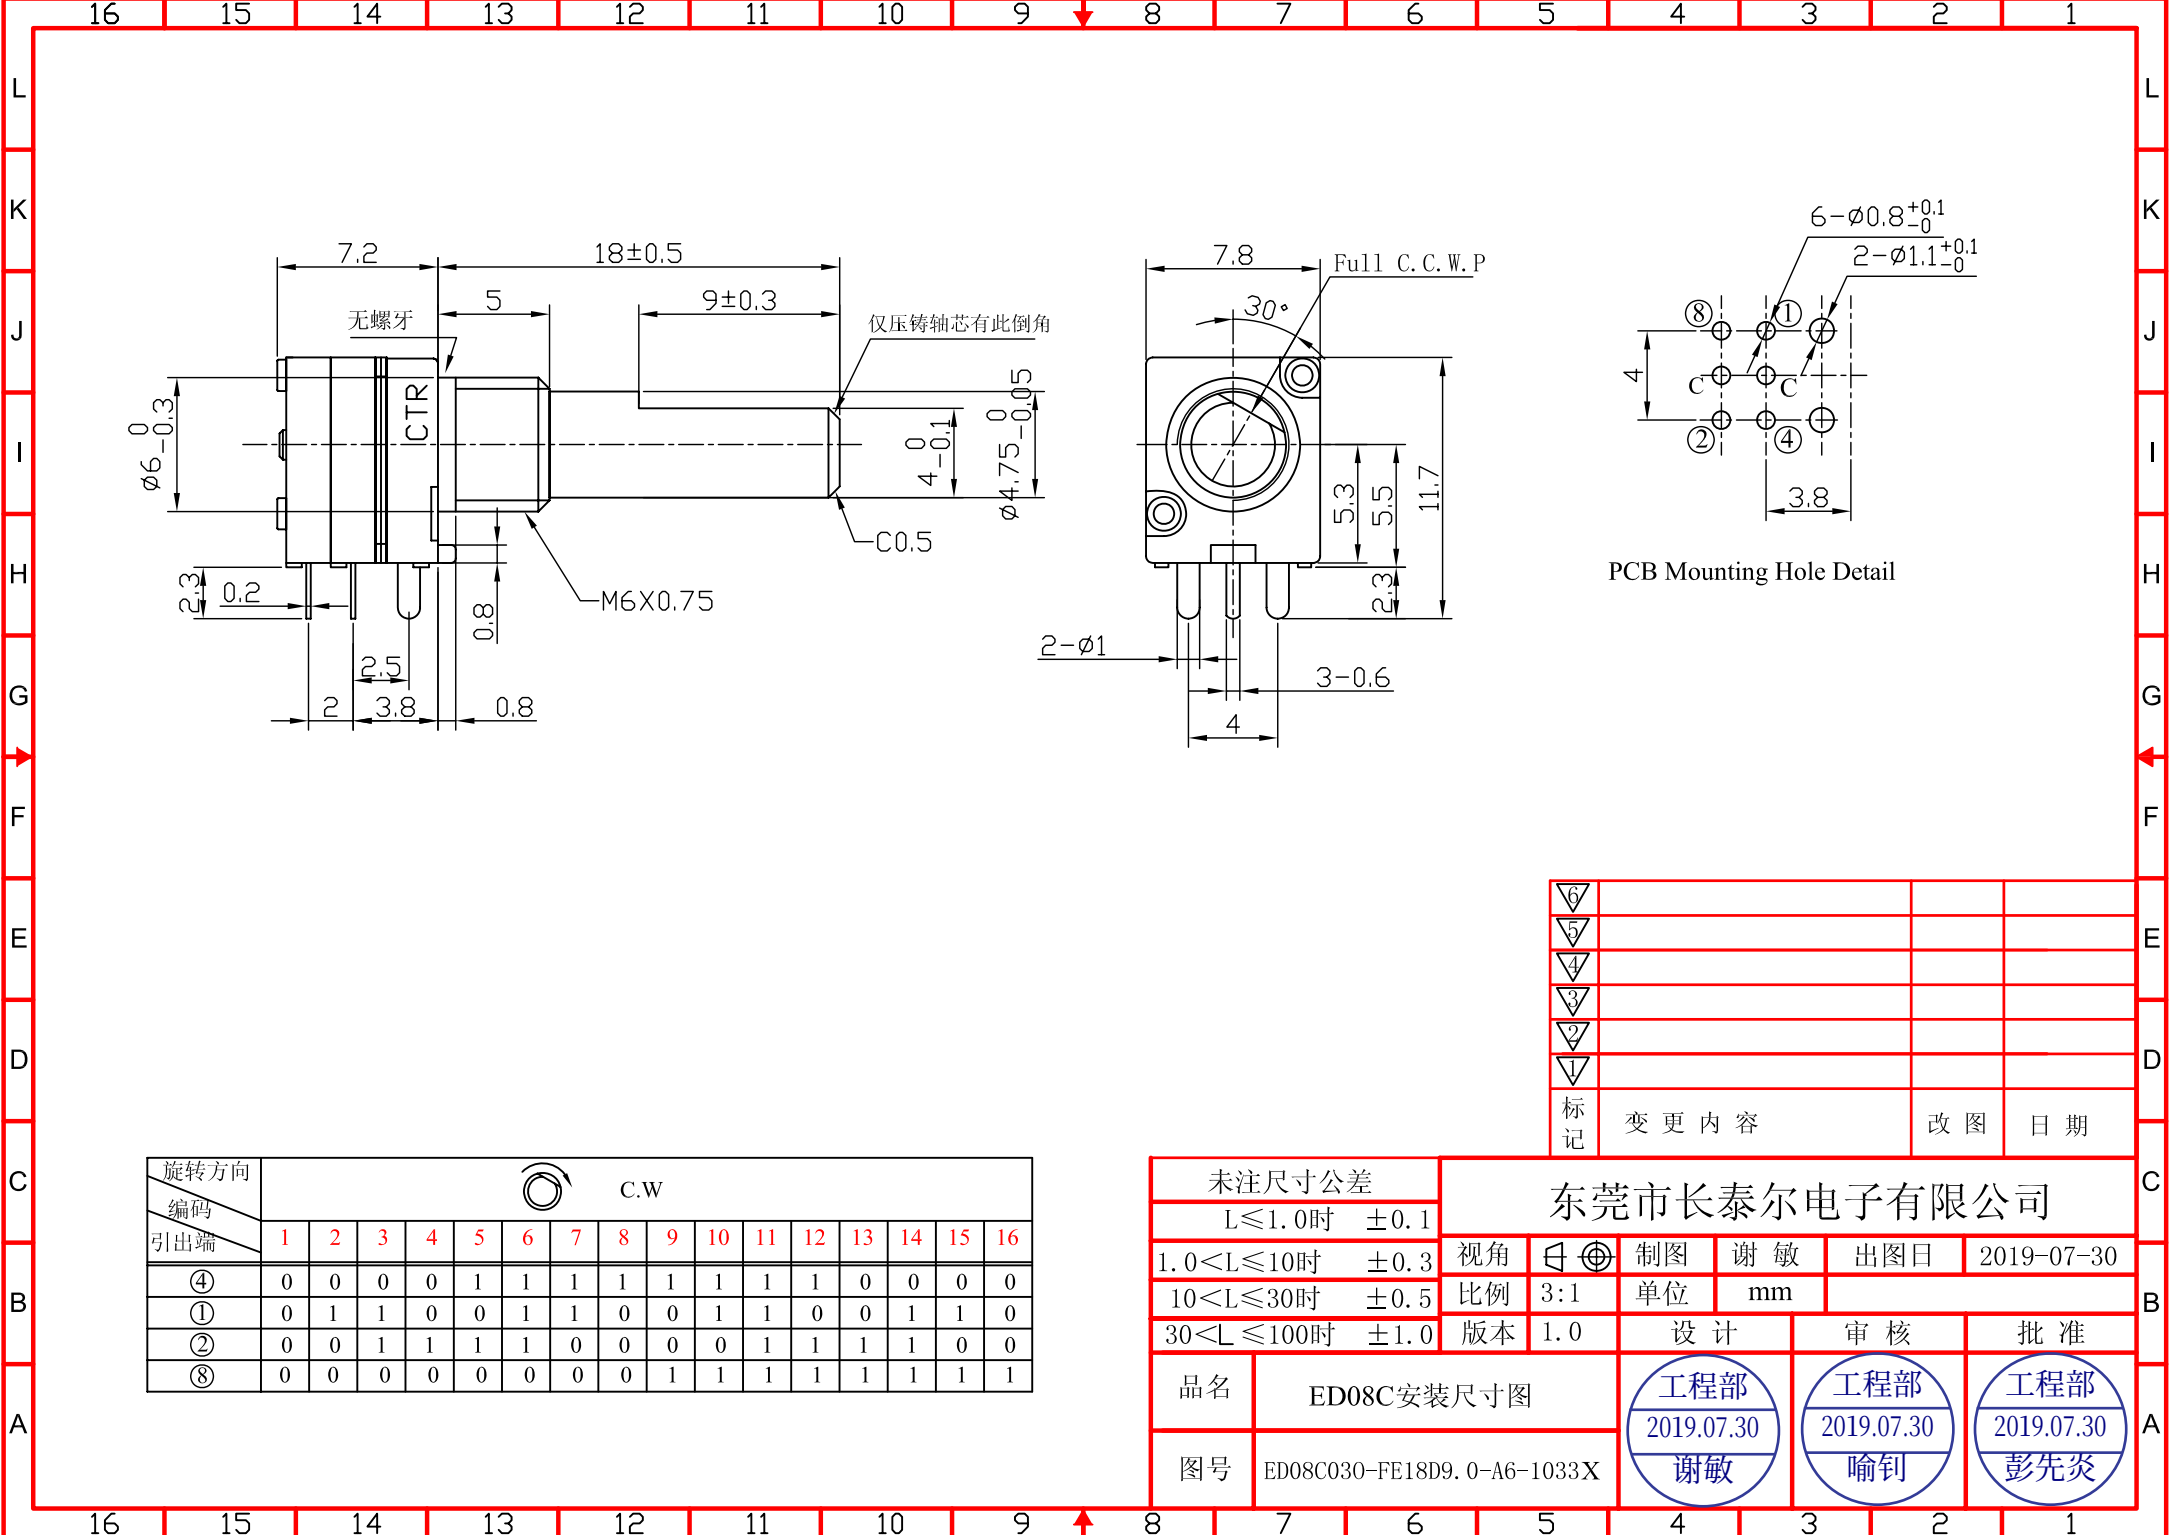

旋转方向 编码 引出端	C.W															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
④	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0
①	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
②	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0	0
⑧	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

未注尺寸公差		东莞市长泰尔电子有限公司					
L ≤ 1.0 时		±0.1					
1.0 < L ≤ 10 时	±0.3	视角	45°	制图	谢敏	出图日	2019-07-30
10 < L ≤ 30 时	±0.5	比例	3:1	单位	mm		
30 < L ≤ 100 时	±1.0	版本	1.0	设计	审核	批准	
品名	ED08C安装尺寸图			工程 部	工程 部	工程 部	
图号	ED08C030-FE18D9.0-A6-1033X			2019.07.30 谢敏	2019.07.30 喻钊	2019.07.30 彭先炎	