

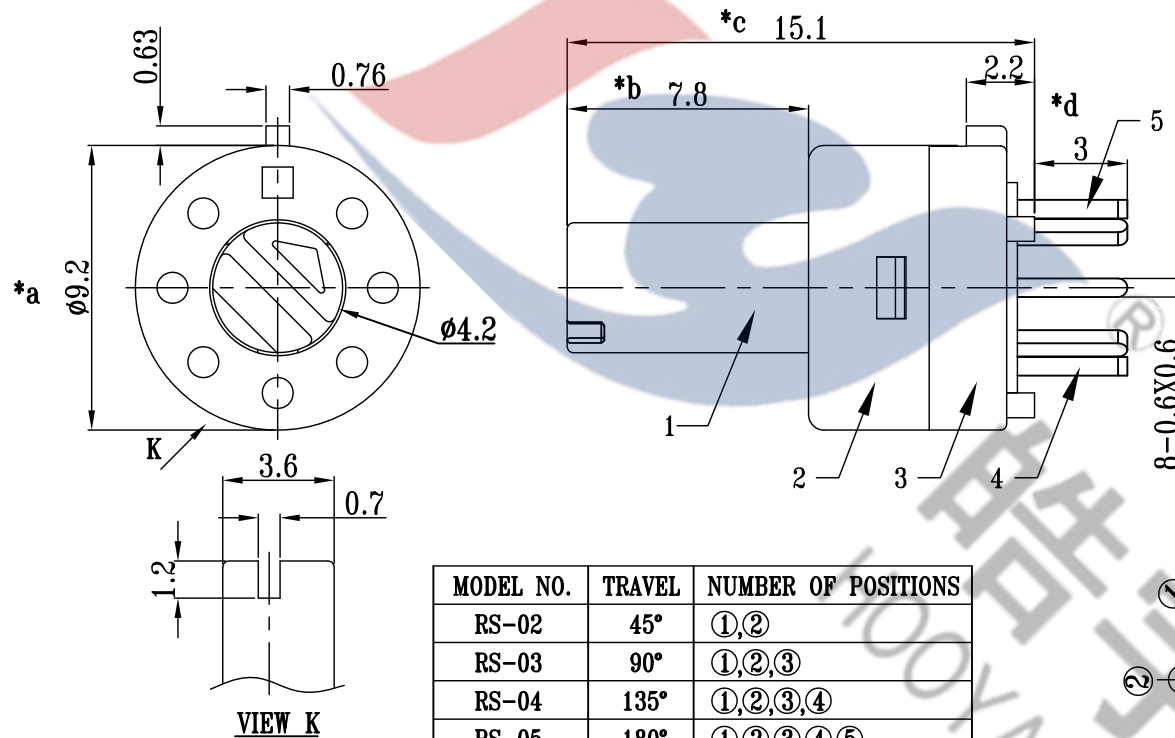



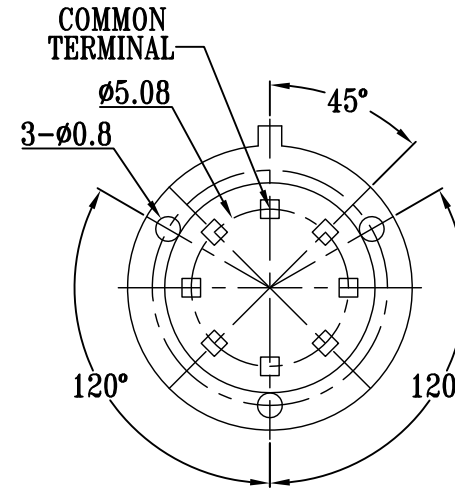

MODEL NO.	TRAVEL	NUMBER OF POSITIONS
RS-02	45°	①,②
RS-03	90°	①,②,③
RS-04	135°	①,②,③,④
RS-05	180°	①,②,③,④,⑤
RS-06	225°	①,②,③,④,⑤,⑥
RS-07	270°	①,②,③,④,⑤,⑥,⑦
RS-08	315°	①,②,③,④,⑤,⑥,⑦,⑧



SCHEMATIC

P.C.B LAYOUT
BOTTOM VIEW

ELECTRICAL RATING: 0.5A 24V DC ; 0.2A 48V DC
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN. 500V DC
DIELECTRIC STRENGTH: 500V AC FOR 1 MINUTE
OPERATING FORCE: 300 ± 150gf
OPERATING LIFE: 10000 cycles
OPERATING TEMPERATURE RANGE: -20 C ~ +70 C

					TOLERANCE UNLESS SPECIFIED									
7	SPRING	STEEL WIRE	1	NATURAL	<1.5: ±0.1mm	ANGULAR ±1°	A0							
6	CONTACT	BRASS STRIP	1	Au PLATED	>1.5~5.0: ±0.25mm									
5	TERMINAL B	BRASS STRIP	1	Au PLATED	>5.0: ±0.3mm			NO	DATE	REVISIONS		BY	APPD	
4	TERMINAL A	COPPER STRIP	7	Au PLATED	TITLE : ROTARY SWITCH			UNIT : MM	ROHS	DWN				
3	CASE	LCP	1	BLACK	MODEL: RS-02 300 ± 150gf			SCALE: 1:1	COMPLIANT	CHK'D				
2	COVER	PA66	1	BLACK	 皓宇 HOOYA DONGGUANG HAoyu ELECTRONICS CO., LTD 东莞市弘皓电子有限公司							APPD		
1	KNOB	PA66	1	BLACK										
NO.	PART	NAME	MATERIAL	QTY	FINISHING			PRO.AGL: 					REV :A0	



DONGGUANG HAOYU ELECTRONICS CO., LTD
东莞市弘皓电子有限公司

REV :A0