


TABLE 1: ELECTRICAL SPECIFICATIONS AT 25°C

PARAMETER	SPEC LIMITS			UNITS
	MIN	TYP	MAX	
INDUCTANCE-BALANCE WITHIN 2% 350mV _{RMS} , 100kHz				
L (1-2)	415	600	---	μH
L (4-3)	415	600	---	μH
HIPOT 60Hz, 5mA MAX, ramp 0.5s, dwell 1s 1 TO 4	1,000	---	---	V _{RMS}

FIGURE 1: SCHEMATIC




Notes:

- 1) Design to comply with the requirements of UL, IEC and CSA Insulation System Class B.
- 2) All units comply with the requirements of REACH regulation.
- 3) All units comply with the requirements of EU RoHS Directive.
- 4) All materials per Premier Magnetics UL file #E177139.
- 5) Label packaging with.

P TSD-4547
M YYWW

FIGURE 2: PHYSICAL DIMENSIONS (mm)

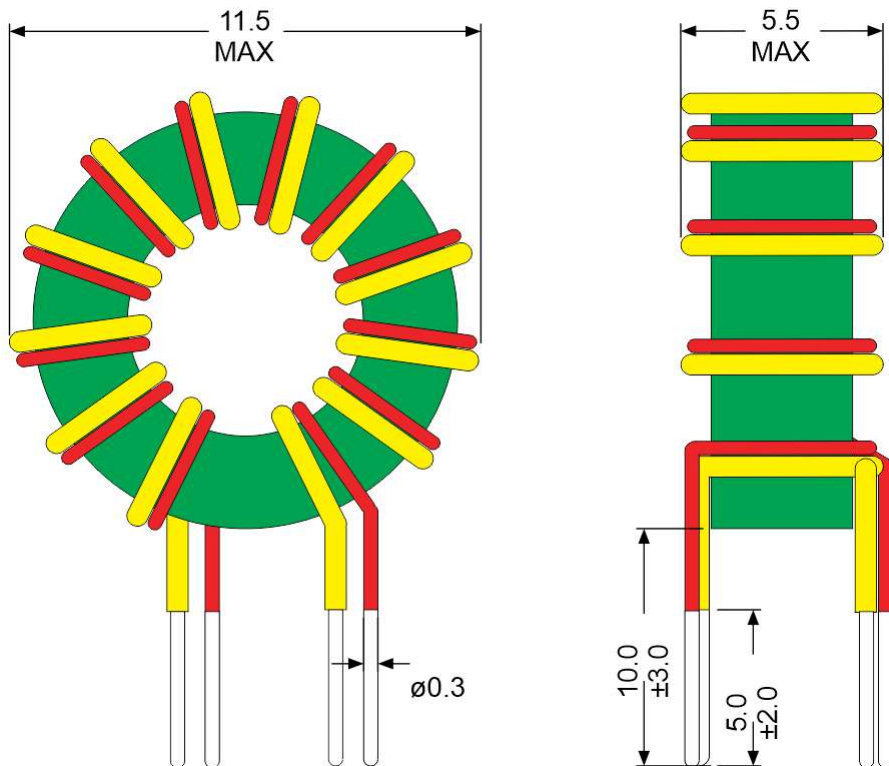

RoHS