

MATERIALS

HOUSING:

ALUMINUM 6061, NICKEL PLATE
(500 MICROINCHES MINIMUM)
PER SAE-AMS-2404

INSULATOR:

LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138

CONTACT/SOLDERCUP:





COPPER ALLOY PER MIL-DTL-
83513, GOLD PLATED PER ASTM
B488, (HARD GOLD) TYPE II
CODE C CLASS 1.27

INTERFACIAL SEAL:

SILICONE RUBBER PER A-A-
59588

HARDWARE:

AVAILABLE UPON REQUEST

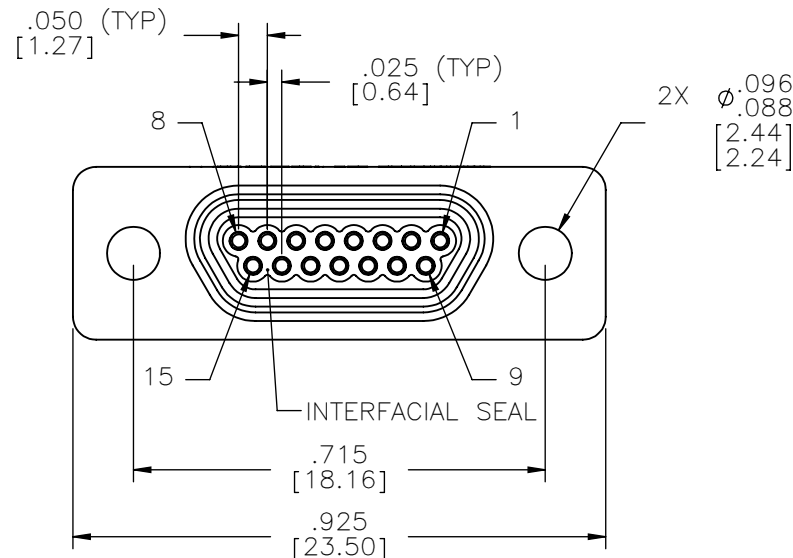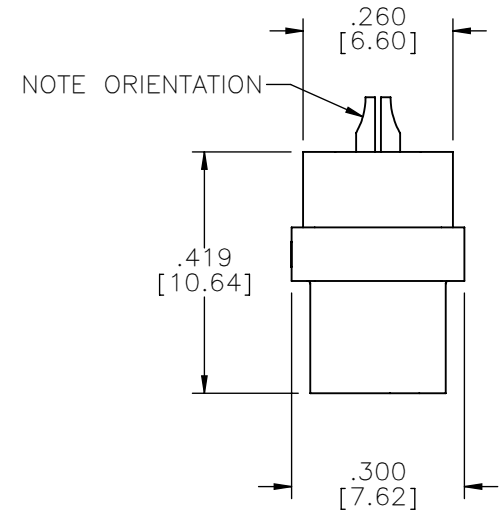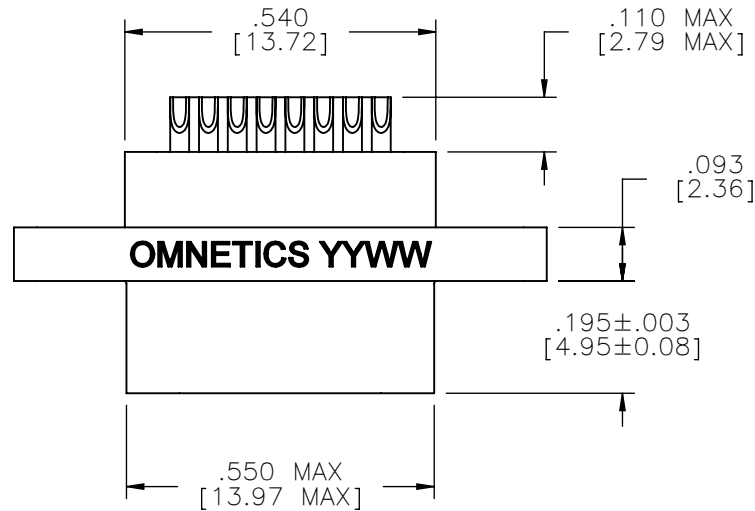

ACTUAL SIZE

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MMS SLDW	THIRD ANGLE	
	-TOLERANCES-	
	UNLESS OTHERWISE NOTED	
	DIMENSIONS IN INCHES	
2	PL DEC±	.01
3	PL DEC±	.005
4	PL DEC±	.0005
	ANGLES ± 1°	

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		DATE	
DFTM. NJS	01-13-10	TITLE:	
CHK'D.		(15) SOCKET FEMALE	
APP'D.		MICRO-D CONNECTOR	

OMNETICS	
CONNECTOR CORPORATION	
7260 COMMERCE CIRCLE EAST	
MINNEAPOLIS, MN 55432	
WWW.OMNETICS.COM	

CAGE CODE 61873	
DWG NO. A99000-015	
SHEET 1 OF 1	REV C
SCALE: 3:1	

RoHS