
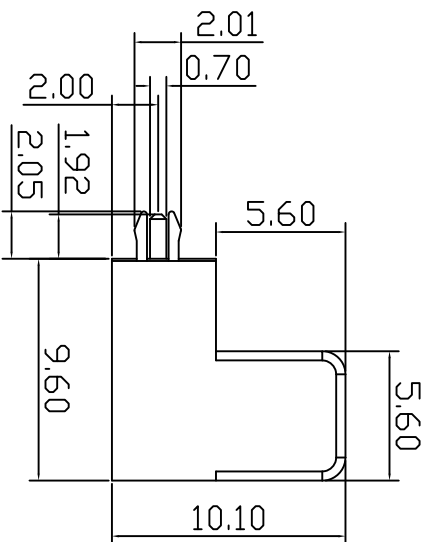
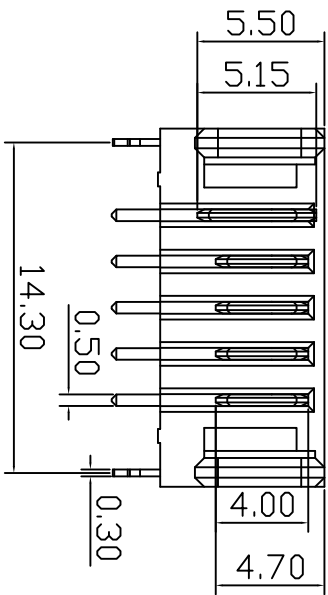




SCALE=1:2

MATERIAL
INSULATOR : LCP (UL94V-0)
CONTACT : C2680
CONTACT PLATED : GOLD OVER NICKEL OR TIN SPECIFICATION
CURRENT RATING : 7A
INSTANT CURRENT : 10A
CONTACT RESISTANCE : 30mΩ
INSULATION RESISTANCE : 100MΩ
DIELECTRIC VOLTAGE : 500V
OPERATING TEMPERATURE : -40° C~105° C

REV.	ECN NO.	DESCRIPTION	DWN.	APVD.	DATE
X1	N/A	Initial release	WTC	DLQ	2019.05.09

THE RESTRICTION OF ENVIRONMENTAL MANAGEMENT SUBSTANCES IS
BASED ON THE NEW VERSION OF HTO-S-3Q-83

TITLE:




2.0mm Battery Connector Male

HOMETOM www.hometom.com,tw
HORNG TONG ENTERPRISE CO.,LTD.

TOLERANCE		APPROVAL:		UNIT:	PART NO:
LINEAR:	ANGLE:	CHECK:		mm	BA0502***D088
X ₁ ±0.30	X ₂ ±2°			SIZE:	DWG.NO:
X ±0.25	X° ±1°			A4	CBA033-00
.XX ±0.20	.XX° ±0.5°			SCALE:	PRJ.:
CUSTOMER DRAWING	REV: X1	DRAWN:		1:1	
				SHEET:	1 / 2

BA0502***D088

MATERIAL
6=LCP
COLOR
B=BLACK
PLATING
J=Sn 100u1°

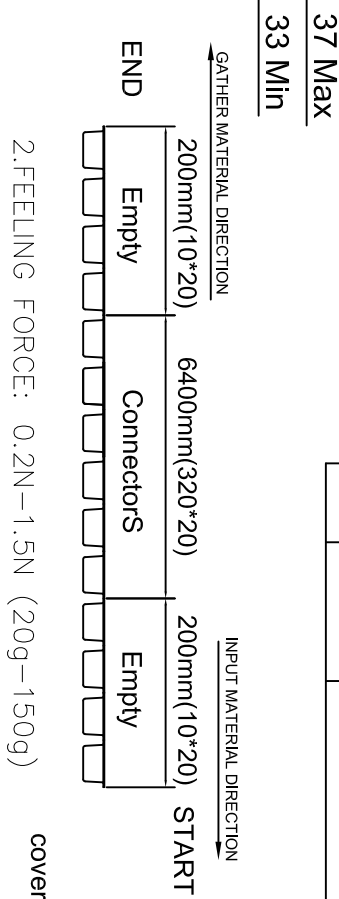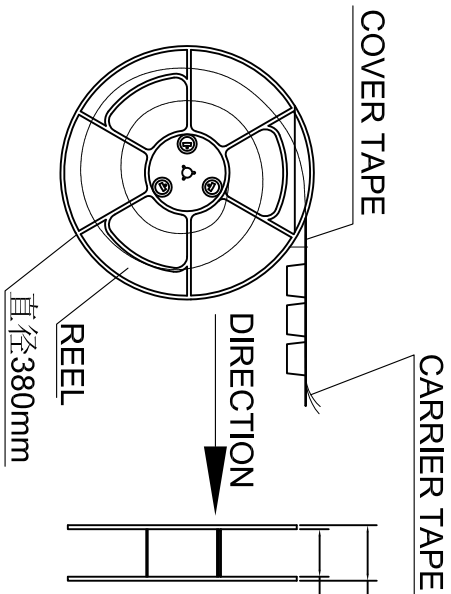

2.FEELING FORCE: 0.2N-1.5N (20g-150g)

cover

USER DIRECTION OF UNREELING

$\phi 1.50^{+0.15}_{-0.00}$



2.00±0.10

REEL

= 1 REEL
= 320 PCS

1 CARTON
= 10 REEL
= 3200 PCS

$\Delta 3.0^{+1.2}_{-1.0}$
(Pull direction)

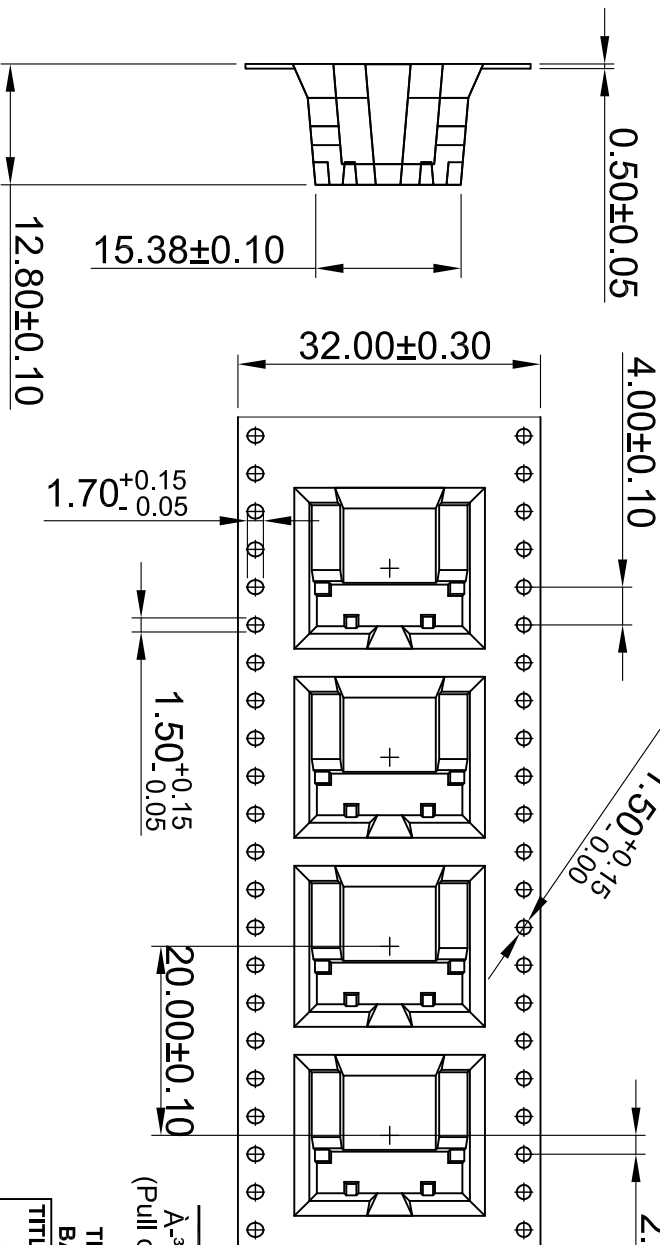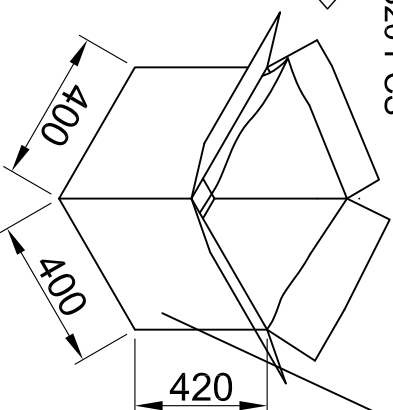

THE RESTRICTION OF ENVIRONMENTAL MANAGEMENT SUBSTANCES IS
BASED ON THE NEW VERSION OF HTO-QS-3Q-83

TITLE:

2.0mm Battery Connector Male

HOMETOM www.hometom.com.tw
HORNG TONG ENTERPRISE CO.,LTD.

TOLERANCE

APPROVAL:

UNIT:

PART NO:

LINEAR:

CHECK:

SIZE:

DWG.NO: CBA033-00

X. ±0.30

X. ±0.25

A4

PRJ.: SHEET: 2/ 2

XX ±0.20

XX ±0.5°

SCALE:

1:1

CUSTOMER

DRAWING

REV:

X1

DRAWN:

DRAWING

REV:

X1

SCALE:

1:1