



|       | 2    |      | 3    |       | 4     |       | 5     |       | 6     |       |       |     |     |             |      |      |
|-------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-------------|------|------|
| Poles | 01P  | 02P  | 03P  | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P   | 12P   | REV | ECN | DESCRIPTION | DRFT | DATE |
| Dim P | --   | 2.54 | 5.08 | 7.62  | 10.16 | 12.70 | 15.24 | 17.78 | 20.32 | 22.86 | 27.94 |     |     |             |      |      |
| Dim L | 3.96 | 6.50 | 9.04 | 11.58 | 14.12 | 16.66 | 19.20 | 21.74 | 24.28 | 26.82 | 31.90 |     |     |             |      |      |



A

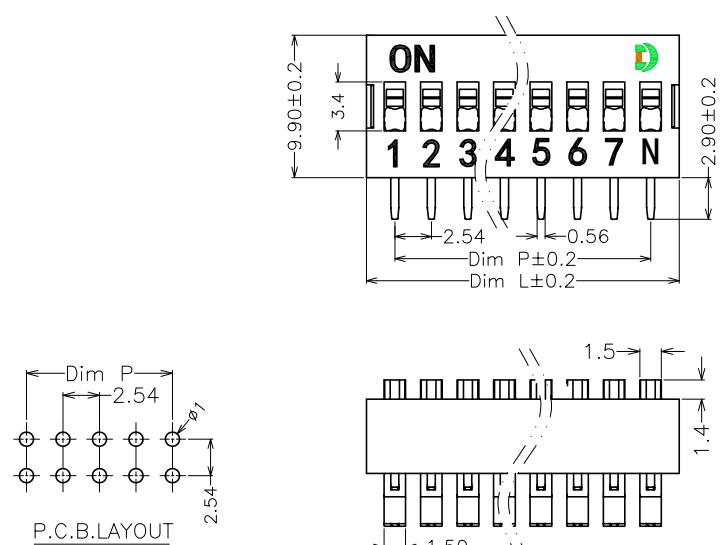

SCHEMATIC(TYP.)




(1,2,3,4,5,POS AVAIL)

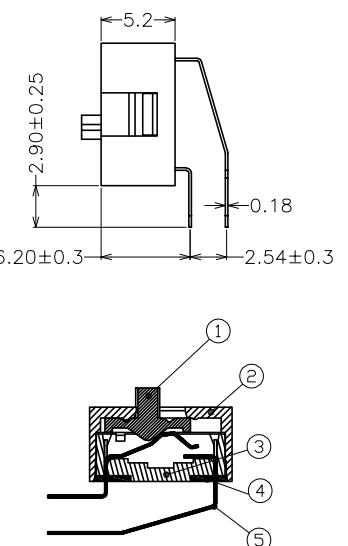

## Specifications

- Contact Rating  
Switching.....25mA,24VDC  
Non-Switchin.....100mA,50VDC
- Contact Resistance  
Initial.....50mΩ Max  
After Life Test.....100mΩ Max
- Insulation Resistance.....100MΩ Min at 500VAC
- Dielectric Strength.....500VAC/1 minute
- Operating Force.....1000g Max
- Mechanical Life.....5000 cycles
- Electrical Life.....3000 cycles
- Operating Temperature : -40°C to +85°C.
- Storage Temperature : -40°C to +85°C.



## Packaging Information

- All DIP switches are shipped in Tube
- Actuators all in "OFF" position

## HOW TO ORDER

DA-XXP-C-X

→□:Convention C:Secure the cover

→Color: RD(Red) BU(Blue) BK(Black)

→No.of poles:01~12P

→MODEL

| NO | NAME OF PART | MATERIAL            | NOTES     |
|----|--------------|---------------------|-----------|
| 5  | Contact      | Copper alloy        | Au Plated |
| 4  | Tape Sealed  | Polyester Film      | /         |
| 3  | Base         | PBT                 | UL94V-0   |
| 2  | Cover        | PBT(Blue/Red/Black) | UL94V-0   |
| 1  | Button       | PBT                 | UL94V-0   |

| GENERAL TOLERANCE | ANGLE TOLERANCE |
|-------------------|-----------------|
| X. ±0.5           | X. ±5°          |
| X. ±0.3           | X. ±3°          |
| .XX ±0.1          | .XX ±1°         |

**DORABO** 宁波地博电气有限公司  
NINGBO DORABO ELECTRICAL CO., LTD  
NAME: DA-XXP-C-X  
DRAWING NO.: DB0021040013 REV: M0  
DRFT: ENK 2025.02.27 TYPE: CUSTOMER\_DRAWING SCALE: SHEET 1/1

1

2

3

4

5

6