

碳化硅肖特基二极管

Silicon Carbide Schottky Diode

KS04065-A

V_{RRM}	=	650 V
$I_F (T_c=161^{\circ}\text{C})$	=	4 A
Q_c	=	9.1 nC

特点 / Features

- 肖特基整流器 / 650-Volt Schottky Rectifier
- 零反向恢复电流 / Zero Reverse Recovery Current
- 零正向恢复电压 / Zero Forward Recovery Voltage
- 高工作频率 / High-Frequency Operation
- 不受温度影响的开关特性 / Temperature-Independent Switching Behavior
- 高速开关 / Extremely Fast Switching
- V_F 正温度特性 / Positive Temperature Coefficient on V_F

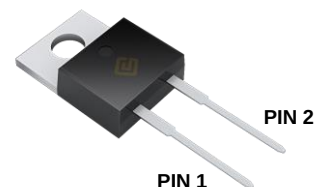
优势 / Benefits

- 单极器件 / Replace Bipolar with Unipolar Rectifiers
- 零开关损耗 / Essentially No Switching Losses
- 高效率 / Higher Efficiency
- 减小散热器 / Reduction of Heat Sink Requirements
- 易于并联使用 / Ease of Paralleling

应用领域 / Applications

- 开关电源 / Switch Mode Power Supplies (SMPS)
- 功率因数校正 / Power Factor Correction
- 电机驱动 / Motor Drives

封装 / Package



TO-220-2L



Part Number	Package	Marking
KS04065-A	TO-220-2L	KS04065A

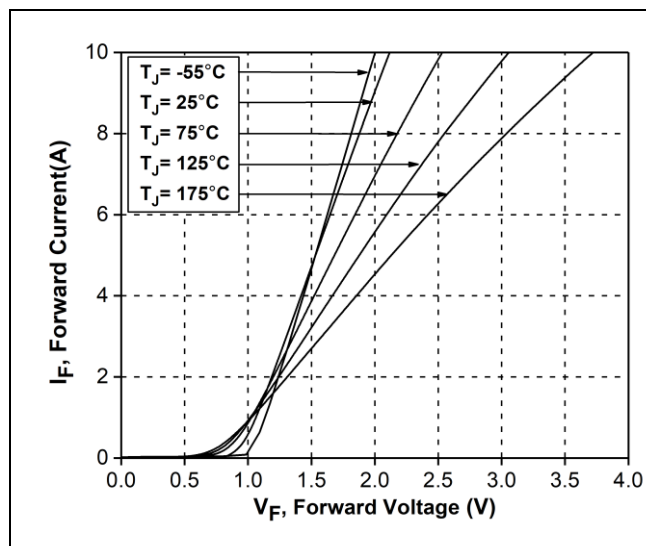
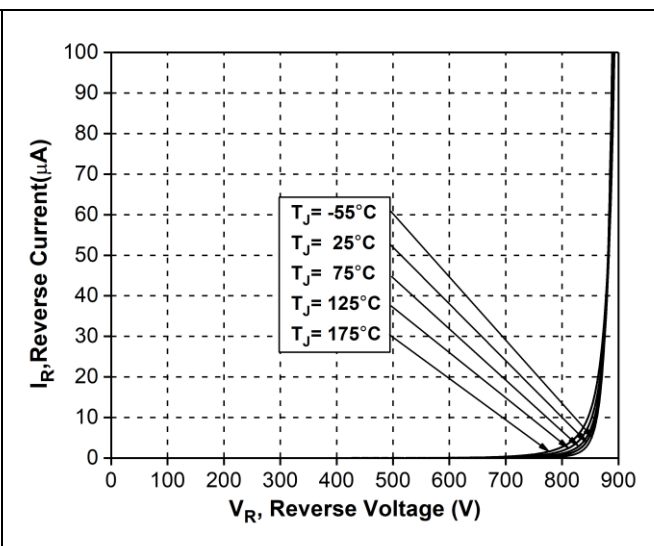
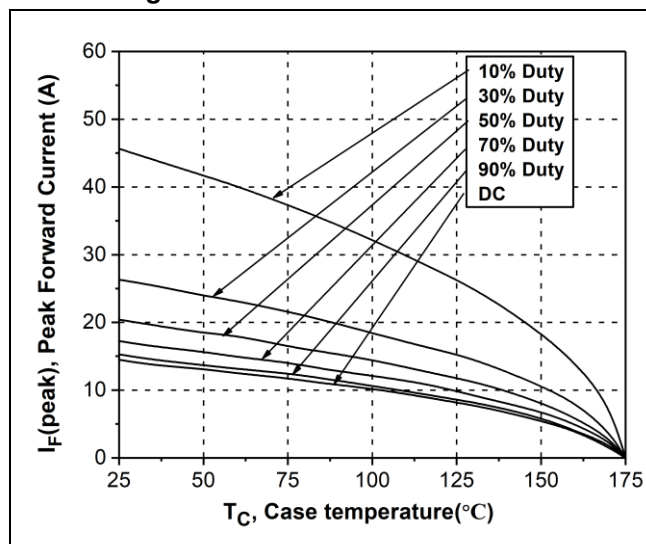
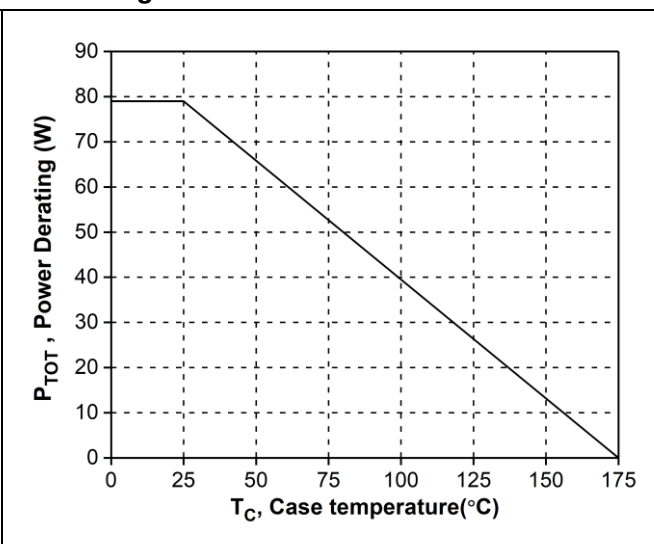
最大额定值 / Maximum Rated Values ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

符号 Symbol	参数 Parameter	值 Value	单位 Unit	测试条件 Test Conditions	备注 Note
V_{RRM}	反向重复峰值电压 Repetitive peak reverse voltage	650	V		
V_R	直流反向阻断电压 DC Peak Reverse Voltage	650	V		
I_F	正向电流 Continuous Forward Current	15 7.5 4	A	$T_C=25^{\circ}\text{C}$ $T_C=135^{\circ}\text{C}$ $T_C=161^{\circ}\text{C}$	Figure 3
I_{FRM}	正向重复峰值电流 Repetitive Peak Forward Surge Current	25 23	A	$T_C=25^{\circ}\text{C}$, $t_P=10\text{ms}$, Half Sine Pulse $T_C=110^{\circ}\text{C}$, $t_P=10\text{ms}$, Half Sine Pulse	
I_{FSM}	正向浪涌电流 Non-Repetitive Forward Surge Current	30 27	A	$T_C=25^{\circ}\text{C}$, $t_P=10\text{ms}$, Half Sine Pulse $T_C=110^{\circ}\text{C}$, $t_P=10\text{ms}$, Half Sine Pulse	Figure 9
$I_{F,MAX}$	非重复正向峰值电流 Non-Repetitive Peak Forward Current	200 165	A	$T_C=25^{\circ}\text{C}$, $t_P=10\mu\text{s}$, Square Wave Pulse $T_C=110^{\circ}\text{C}$, $t_P=10\mu\text{s}$, Square Wave Pulse	Figure 9
P_{tot}	耗散功率 Power Dissipation	79 35	W	$T_C=25^{\circ}\text{C}$ $T_C=110^{\circ}\text{C}$	Figure 4
T_J	工作结温 Operating Temperature	-55 to +175	$^{\circ}\text{C}$		
T_{stg}	储存温度 Storage Temperature	-55 to +175	$^{\circ}\text{C}$		

电气参数 / Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

符号 Symbol	参数 Parameter	值 / Value			单位 Unit	测试条件 Test Conditions	备注 Note
		Min.	Typ.	Max.			
V_{DC}	击穿电压 DC blocking voltage	650			V	$I_R=200\mu\text{A}$	
V_F	正向电压 Forward Voltage		1.4 1.7	1.7 2.2	V	$I_F=4\text{A}$, $T_J=25^{\circ}\text{C}$ $I_F=4\text{A}$, $T_J=175^{\circ}\text{C}$	Figure 1
I_R	反向电流 Reverse Current		1 6	20 60	μA	$V_R=650\text{V}$, $T_J=25^{\circ}\text{C}$ $V_R=650\text{V}$, $T_J=175^{\circ}\text{C}$	Figure 2
Q_C	容性电荷 Total Capacitive Charge		9.1		nC	$V_R=400\text{V}$, $T_J=25^{\circ}\text{C}$	Figure 5
C	总电容 Total Capacitance		175 17 15		pF	$V_R=0\text{V}$, $T_J=25^{\circ}\text{C}$, $f=1\text{MHz}$ $V_R=200\text{V}$, $T_J=25^{\circ}\text{C}$, $f=1\text{MHz}$ $V_R=400\text{V}$, $T_J=25^{\circ}\text{C}$, $f=1\text{MHz}$	Figure 6
E_C	电容存储能量 Capacitance Stored Energy		1.36		μJ	$V_R=400\text{V}$	Figure 7

符号 Symbol	参数 Parameter	值 Value	单位 Unit	备注 Note
$R_{\theta JC}$	结壳热阻 Thermal Resistance (Junction to Case)	1.88	$^{\circ}\text{C/W}$	Figure 8

特性曲线 / Typical Performance

Figure 1. Forward Characteristics

Figure 2. Reverse Characteristics

Figure 3. Current Derating

Figure 4. Power Derating

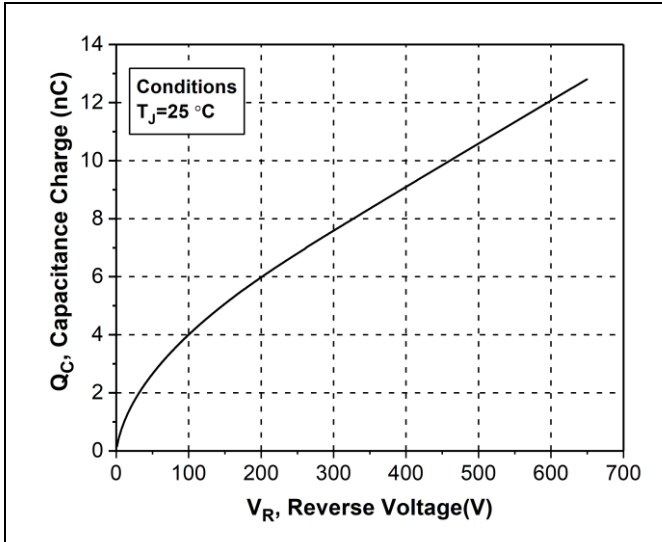


Figure 5. Capacitance Charge Vs. Reverse Voltage

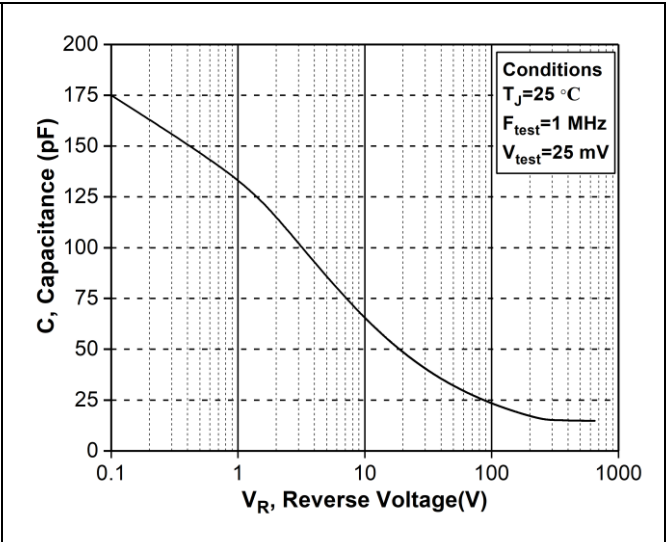


Figure 6. Capacitance Vs. Reverse Voltage

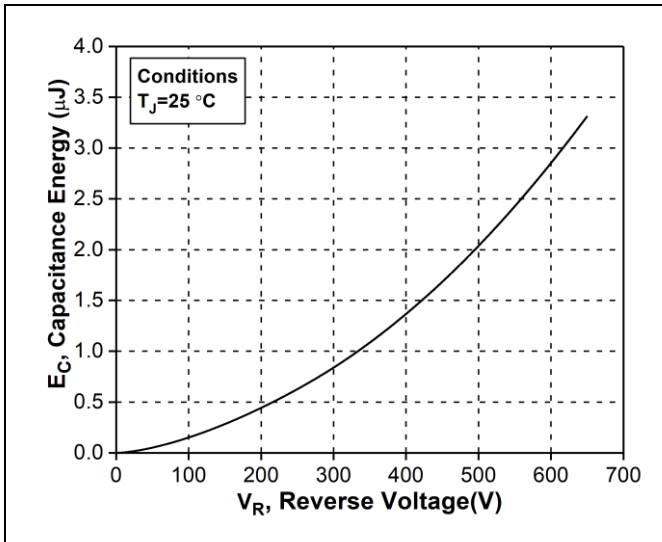


Figure 7. Capacitance Stored Energy

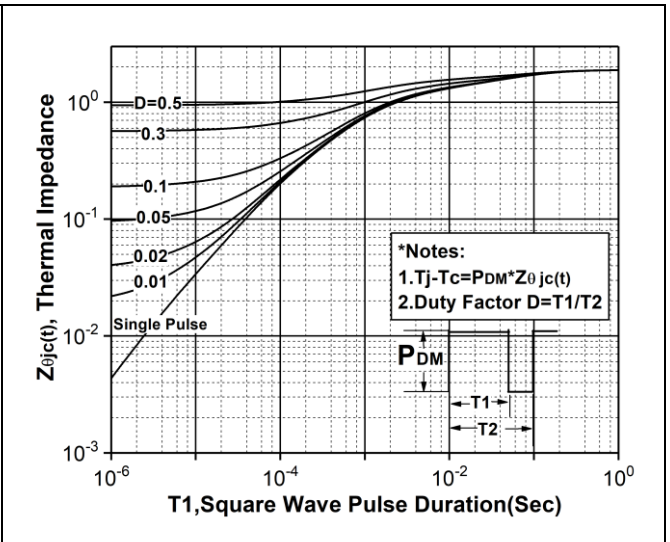


Figure 8. Transient Thermal Response Curve(Junction-to-Case)

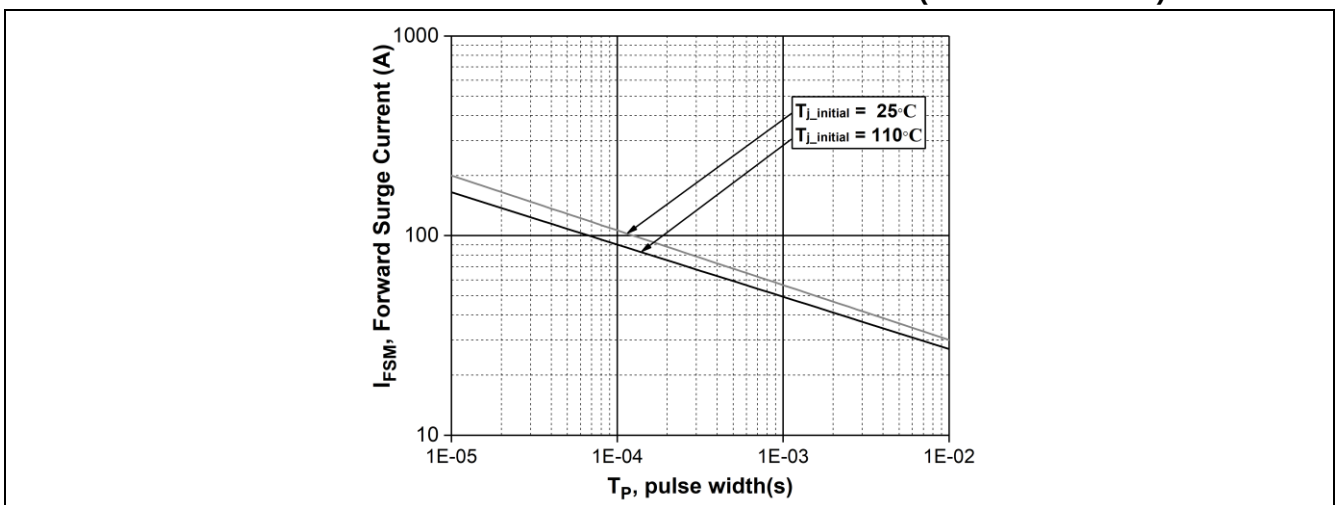
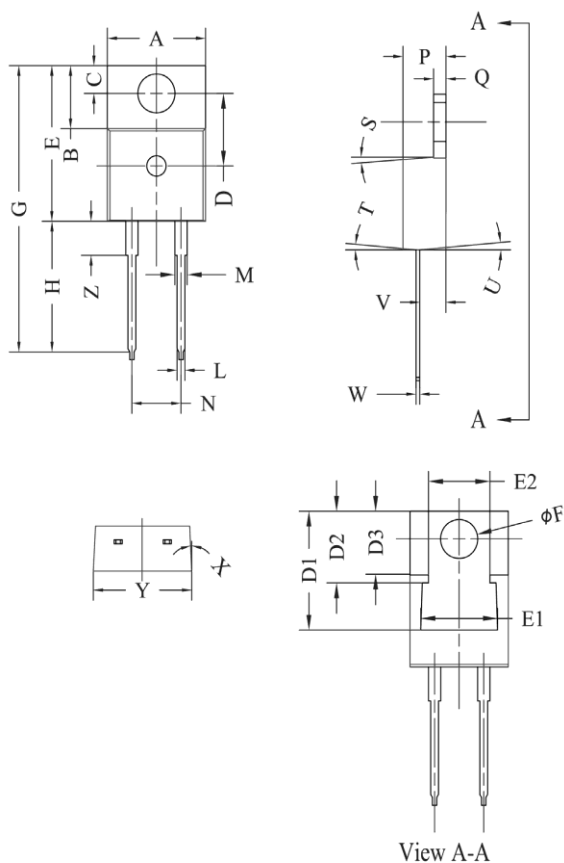



Figure 9. Non-repetitive peak forward surge current versus pulse duration (sinusoidal waveform)

Package TO-220-2L


POS	Inches		Millimeters	
	Min	Max	Min	Max
A	.381	.410	9.677	10.414
B	.235	.255	5.969	6.477
C	.100	.120	2.540	3.048
D	.223	.337	5.664	8.560
D1	.457-.490		11.60-12.45 typ	
D2	.277-.303 typ		7.04-7.70 typ	
D3	.244-.252 typ		6.22-6.4 typ	
E	.590	.615	14.986	15.621
E1	.302	.326	7.68	8.28
E2	.227	.251	5.77	6.37
F	.143	.153	3.632	3.886
G	1.105	1.147	28.067	29.134
H	.500	.550	12.700	13.970
L	.025	.036	.635	.914
M	.045	.055	1.143	1.550
N	.195	.205	4.953	5.207
P	.165	.185	4.191	4.699
Q	.048	.054	1.219	1.372
S	3°	6°	3°	6°
T	3°	6°	3°	6°
U	3°	6°	3°	6°
V	.094	.110	2.388	2.794
W	.014	.025	.356	.635
X	3°	5.5°	3°	5.5°
Y	.385	.410	9.779	10.414
z	.130	.150	3.302	3.810

NOTE: Dimension L, M, W apply for Solder Dip Finish

参考焊盘图 / Recommended Solder Pad Layout


TO-220-2L

- 本文所述产品规定了产品在各状态下的性能、特点和功能，并不保证所述产品安装在客户产品或设备中的性能、特点和功能。为了保证产品在客户产品中工作状态，客户应严谨评估和测试。

Specifications of any and all products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

- 本产品在使用过程中，如应用条件超出本规格书规定值（如最大额定值、工作条件范围或其他参数），即使是短时超过，而引起使用该产品的设备出现故障，森国科不承担任何责任。

SGKS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Silicon products described or contained herein.

- 由于产品/技术改进等原因，本文所述或包含的任何和所有信息可能会发生更改，恕不另行通知。

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.