
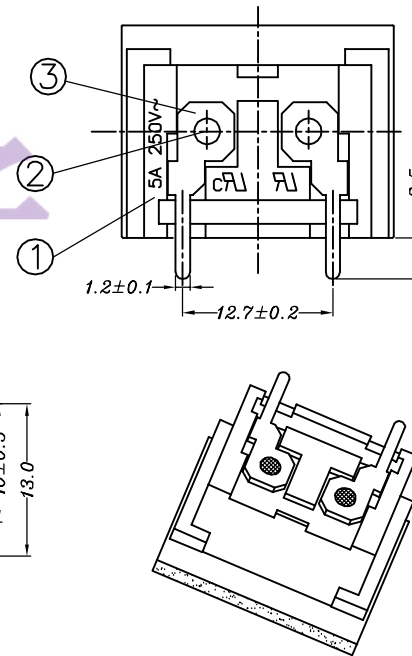
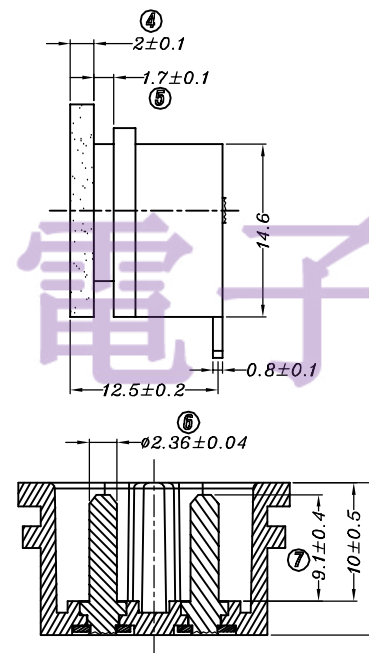

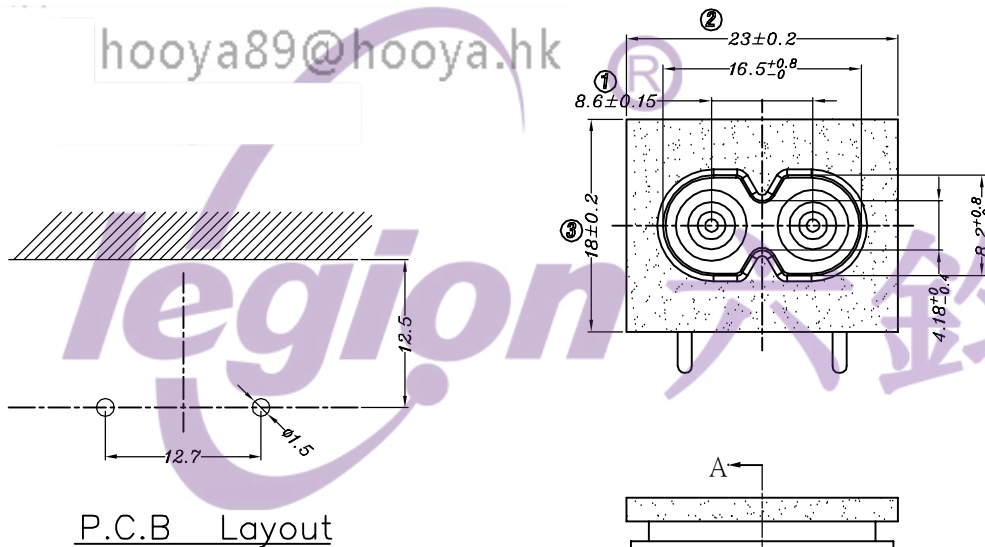


NOTES:

- 1.Rating : 2.5A 250VAC CCC VDE
5A 250VAC UL CUL
- 2.Contact resistance : 50mΩ Max
- 3.Insulation resistance : >100MΩ (Min) 500VDC
- 4.Dielectric strength : >2000VAC 0.5mA 1 minute

TEL : 0769-82310511-867



NO.	Part name and material	Q'TY
3	Soldering PIN Brass Strip t=0.8mm Tin-Plated	2
2	Solid Contact PIN Brass Strip d=Ø2.36mm Ni-Plated	2
1	Body Insulator PC Black Color	1

NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	DIMENSIONAL TOLERANCES	APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	DRAWING NO.	REV.
5		10			RANGE					SCALE	NO		
4		9			TOLERANCE					MAT'L	***		
3		8			X	±0.30				MATERIAL NO.			
2		7			X.X	±0.20							
1	取消北欧四国安规	6			X.XX	±0.10							
					±1°								
						LEGION ELECTRONIC & HARDWARE CO., LTD.				RT-C08-D0-BD		WIF107022	B0