
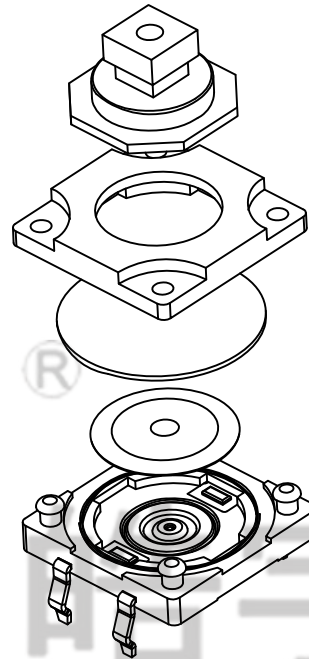

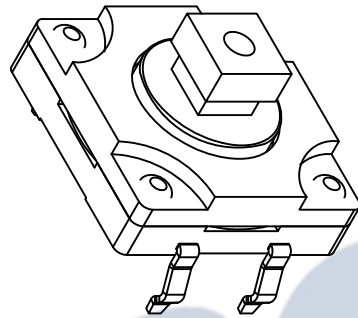
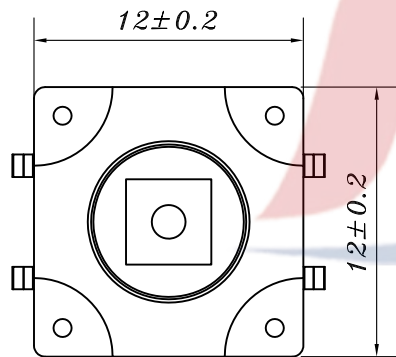
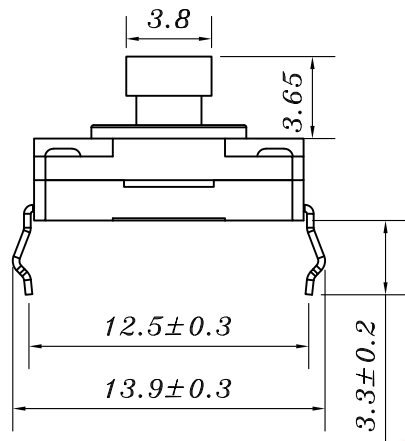


PCB. 焊接图



主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操作力: $250 \pm 40\text{gf}$
4. 行程: $0.45 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85°C, 90%RH/60H

操作力: $E=250 \pm 50\text{gf}$

					TOLERANCE UNLESS SPECIFIED									
					UP TO 5mm:±0.1	ANGULAR ±1°								
6	CONTACT	BRASS	1	Ag-Plated	ABOVE 5mm:±0.2		NO	DATE	REVISIONS			BY	APPD	
5	CASE	PPA	1											
4	WATERPROOF PAD	RUBBER	1		TITLE: TACT SWITCH				UNIT : MM	ROHS	DWN			
3	REED	SUS	1	Ag-Plated	MODEL: TC-00122FS-073E				SCALE: 1:1	COMPLIANT	CHK'D			
2	COVER PLATE	PPA	1		 HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司					APPD				
1	BUTTON	PPA	1											
NO.	PART NAME	MATERIAL	QTY	FINISHING										