
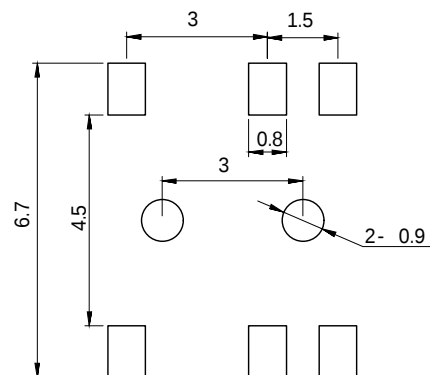
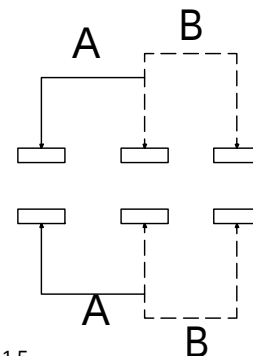
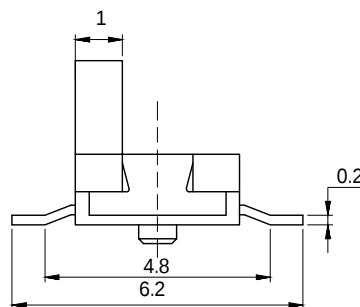
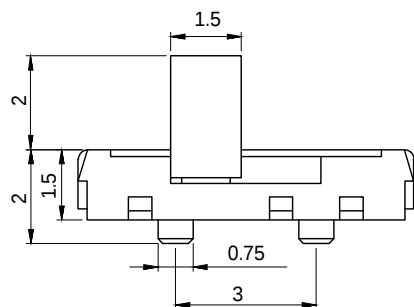
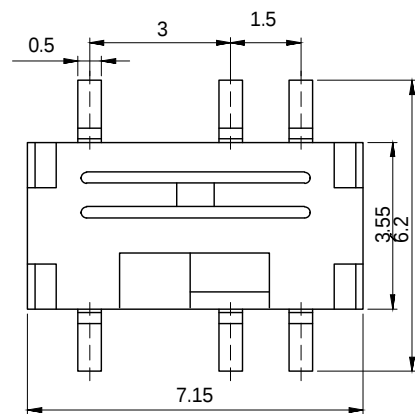




1 :DC12V 0.1A
 2 :AC 250V 50HZ 1min
 3 :≤ 50MΩ
 4 :≥ 100MΩ
 5 : -25 ~ +70
 6 :10000
 7 250°
 8 170GF±50GF
 9 40 ≤ 95%

4	Contact spring	Argentated beryllium	2	silver
3	Cover	Stainless steel	1	gray
2	Base	Imported reinforced nylon	1	Black Ag- plating
1	Push	Imported reinforced nylon	1	Black
NO.	PART NAME	MATERIAL	QTY	FINISHING

YUAN SHENZHEN YIYUAN TECHNOLOGY CO.,LTD		(SHEET)	1/1	(UNIT)MM	
		(REV)	A1	(SCALE)	
		(DATE)	2021.10.12		
		(DESIGN)	LUO		
		(CHECKED)	ROGER LI		
(ITEM NO)	Slide Switch	2	(APPROVED)	ROC ZHAO	GENERAL TOLERANCE ≥ 0~2 ±0.20 ≥ 2~5 ±0.30 ≥ 5 ±0.50 ANGLE ±0.5°
(PART NO)	YSS18-SSX2CG01				
(DWG NO)					
These drawings and specifications are Shenzhen Yiyuan Technology Co Ltd.The property should not be copied. Without Shenzhen Yiyuan Technology Co. Ltd.Prior written consent to copy or use in any way. Email at info@yiyuanswitches.com					