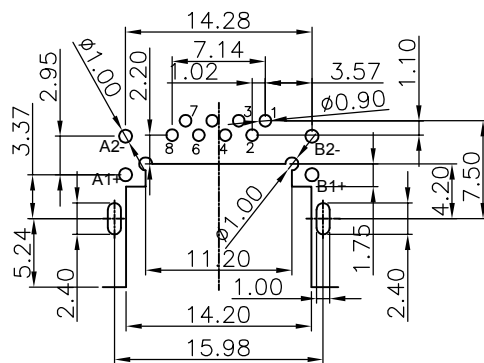


LED electrical characteristics	
Node	
A1(+) A2(-)	A1  A2
B1(+) B2(-)	B1  B2

NOTES

MATERIAL

1. HOUSING MATERIAL: THERMO PLASTICS UL94V-0 .
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.25mm.
 : SELECT GOLD PLATING ON CONTACT AREA AND TIN
 : PLATING ON SOLDER AREA OVER NICKEL.
3. SHIELD: STAINLESS T=0.20mm NI PLATING.
4. GASKET : SPCC T=0.40 NI PLATING.
5. LED: TIN PLATING.

MELECTRICAL




1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC DIELECTRIC
RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORCE : 2.24 KG. F MAX.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

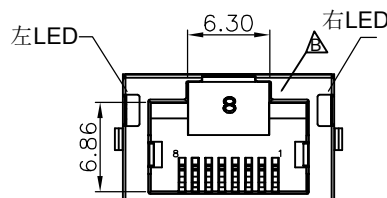



3005 - 2 02 - XX

RJ45 UP 9.9H

类别码 ——
02:左黄右绿

流水码 _____
11:GF LCP黑 盘装
21:GF LCP黑 卷装

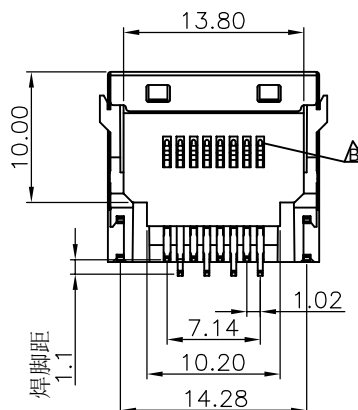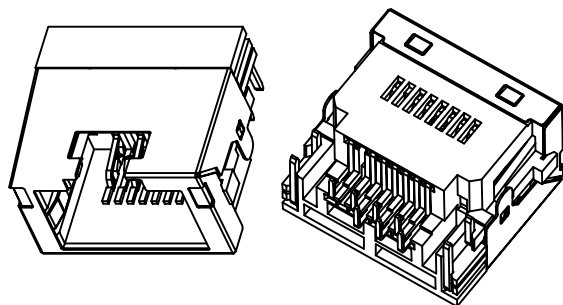

				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.35	UNIT		MM			
				X.XX	±0.25	SIZE	A4	DESIGN	赵文品2024.11.06	PART NO	RJ45-3005-202-11
				X.XXX	±0.05						
				Angle	±2°	SHEET	1/1	CHECK		TITLE	RJ45 沉板5.8 DIP带壳左黄右绿GF LCP黑
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	