



DIMENSIONS:

A	1.060" ± 0.063
B	0.895" ± 0.063
C1	0.820" ± 0.063
C2	1.063" ± 0.063
D	0.025" SQ. ± 0.005
E	0.600" ± 0.030
F	0.018" T X 0.125" ± 0.005
G	0.200" ± 0.030

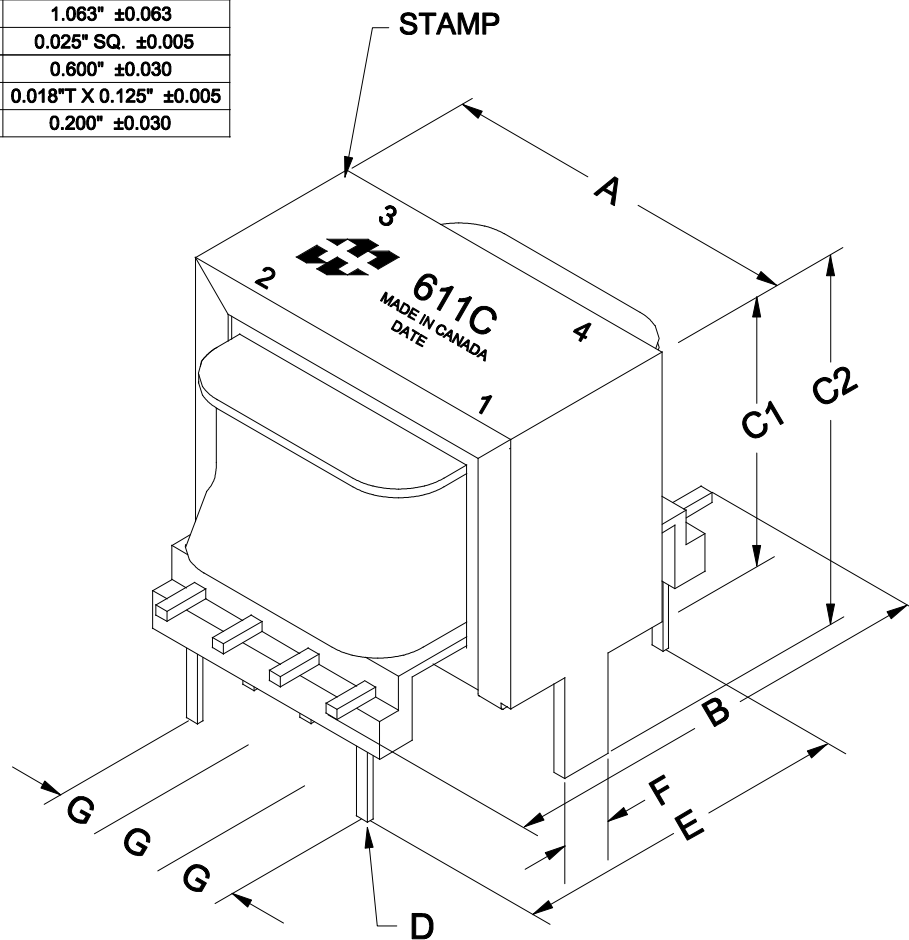

CIRCUIT VOLTAGE: 250V MAX.
 PRIMARY ET CONSTANT: 7250V μ Sec.
 MAX. PRIMARY OR SECONDARY PEAK CURRENT:
 @ 1% DUTY 2.1A
 @ 10% DUTY 0.7A
 WEIGHT: 1.2oz. (0.075Lbs.)

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 5V, 420Hz, Pin 1 - Pin 2	10mA Max.
Sec. N.L.V	@ 5V, 420Hz, Pin 1 - Pin 2 Pin 3 - Pin 4 =	5.000V $\pm 2\%$
Inductance	@ 1V, 1kHz, Pin 1 - Pin 2	51.3mH Min.
DCR	@ 20°C, Pin 1 - Pin 2 = @ 20°C, Pin 3 - Pin 4 =	3.310 Ω $\pm 15\%$ 4.460 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 09/06/16	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PULSE TRANSFORMER	DWG. NO. 611C
			DATE: 09/06/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		