



SK3525

RF SAW Filter

Revision 0 : January 2018

MSL 3 Device



- ☐ Features
- ☐ Specifications
- ☐ Matching Configuration
- ☐ Package Dimension
- ☐ Typical Performance
- ☐ Package
- ☐ Reflow Temperature

Features


- ✧ For RF SAW filter
- ✧ Single-ended operation
- ✧ CSP Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications


Parameter		Unit	Minimum	Typical	Maximum
Frequency range		MHz	1166.22	1176.45	1186.68
Insertion Loss(1166.22-1186.68MHz) (-30~85°C)		dB		1.0	1.6
Insertion Loss(1166.22-1186.68MHz) (25°C)		dB		1.0	1.5
VSWR	@RX port (1166.22-1186.68MHz) (-30~85°C)			1.4	2.0
	@ Ant port (1166.22-1186.68MHz) (-30~85°C)			1.4	2.0
Absolute Attenuation	699-960MHz	dB	35	43	
	1427-1511MHz	dB	30	40	
	1710-2200MHz	dB	30	36	
	2300-2690MHz	dB	30	33	
	3400-3800MHz	dB	20	29	
	5150-5950MHz	dB	20	22	
Harmonics	2nd harmonics <i>Pin</i> = <i>P</i> _{max} , LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,25°C	dBm			-40
	3rd harmonics <i>Pin</i> = <i>P</i> _{max} , LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,25°C	dBm			-40
	other high-order harmonics (<=12.75G) <i>Pin</i> = <i>P</i> _{max} , LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,25°C	dBm			-40
	2nd harmonics <i>Pin</i> = <i>P</i> _{max} , LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,15~85°C	dBm			-36
	3rd harmonics	dBm			-36

	<i>Pin =Pmax, LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,15~85°C</i>				
	<i>other high-order harmonics (<=12.75G) Pin =Pmax, LTE 5MHz,1RB, 50% DC(TDD) or CW(FDD), VSWR<=4:1,15~85°C</i>	dBm			-36
<i>MSL</i>		-	3		
<i>ESD</i>		V	> 100		
<i>Input RF power</i>	<i>Pin max @ Ant Port: 699-960MHz,1427-2690MHz(TX band)</i>	dBm	15dBm, CW, 3000 h, 50 °C		
	<i>Pin max @ Ant port: 1166.22-1186.68 MHz(RX band)</i>	dBm	10dBm, CW, 3000 h, 50 °C		
<i>Ambient Temperature</i>		°C	25		
<i>Operating Temperature Range</i>		° C	-30	-	+85
<i>Storage Temperature Range</i>		° C	-40	-	+85
<i>Package Size</i>		CSP1.1*0.9			

Matching Configuration

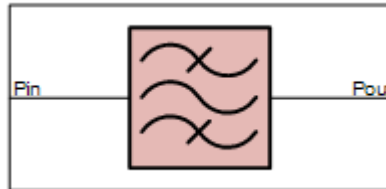

Package Dimension

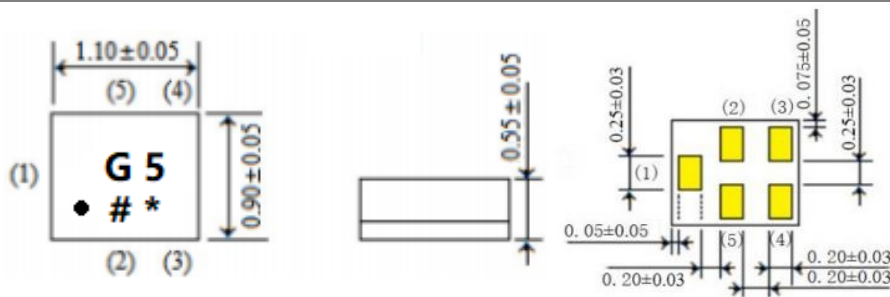

Marking Configuration:



- 1) G 5: Series Number
- 2) #: Month Code
- 3) *: Daily Code
- 4) •: Dot Marking

PIN NO.	(1)	(2)	(3)	(4)	(5)
PIN Name	Input	GND	GND	Output	GND

Unit: mm


Typical Performance

Frequency Response

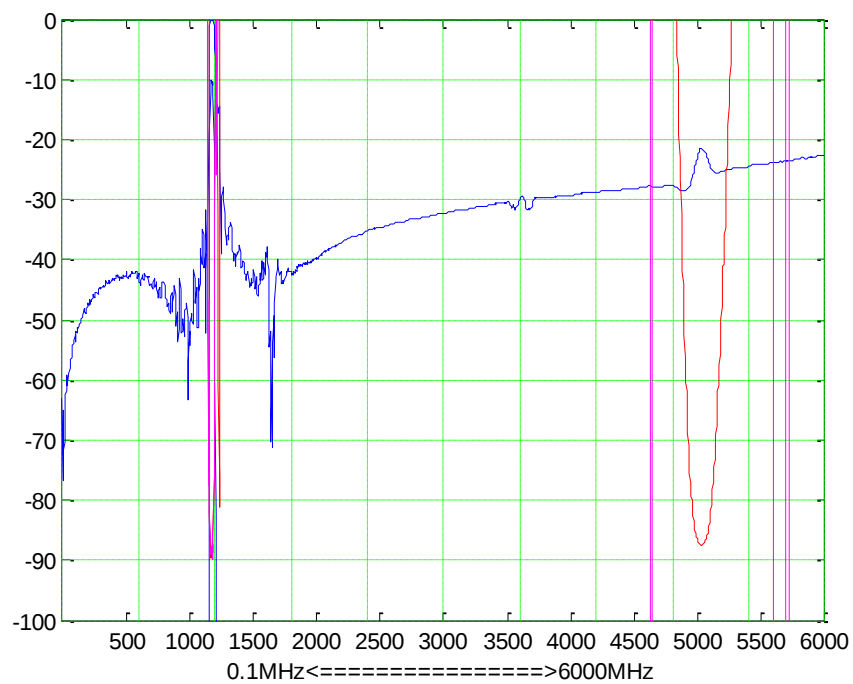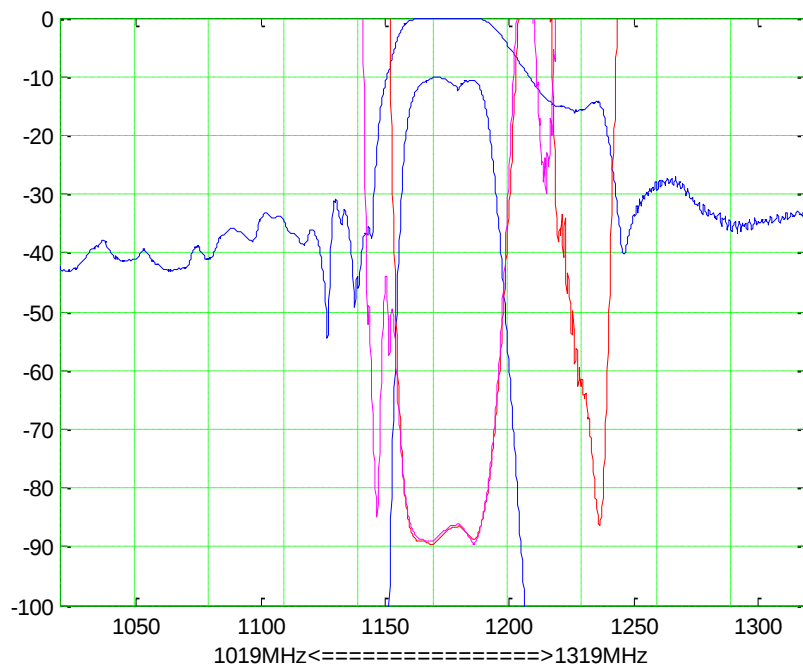


Package


① Dimensions of Tape:

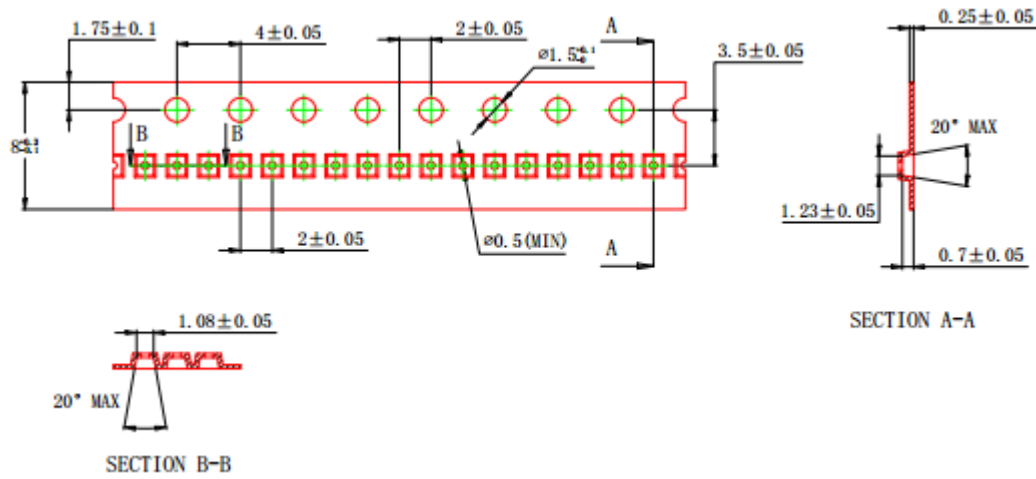

② Dimensions of Reel:

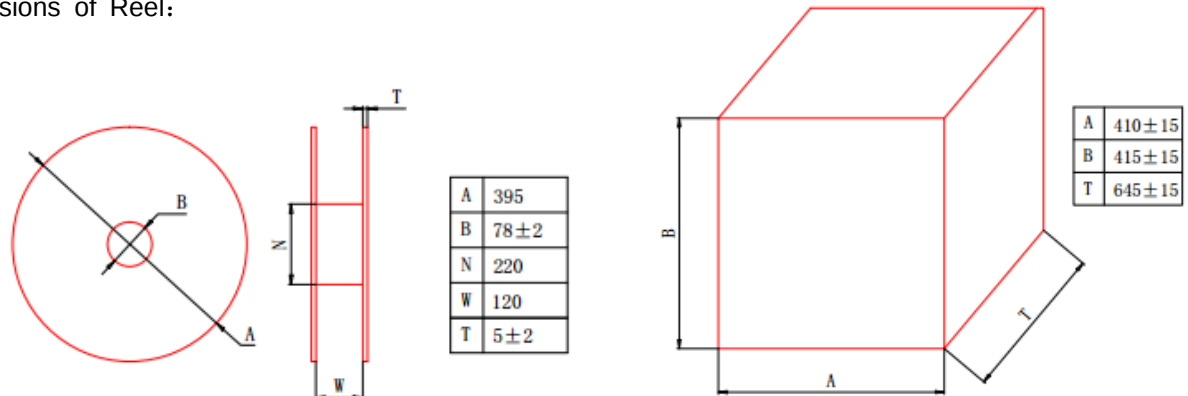

③ Direction of carrier tape:

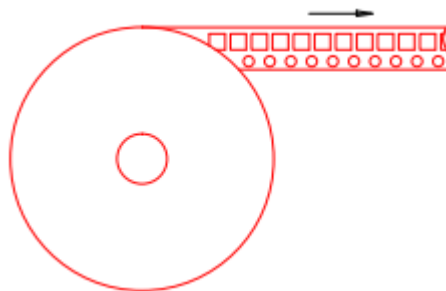

Reflow Temperature

