

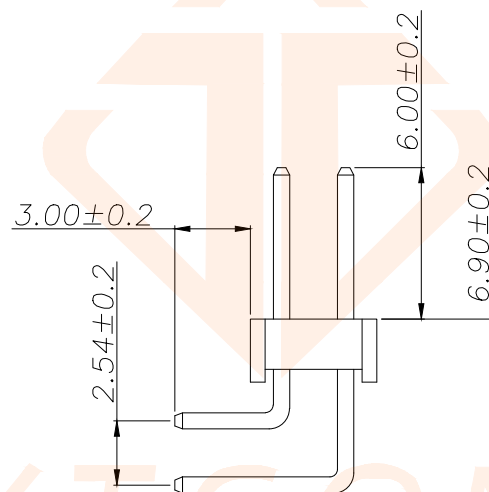


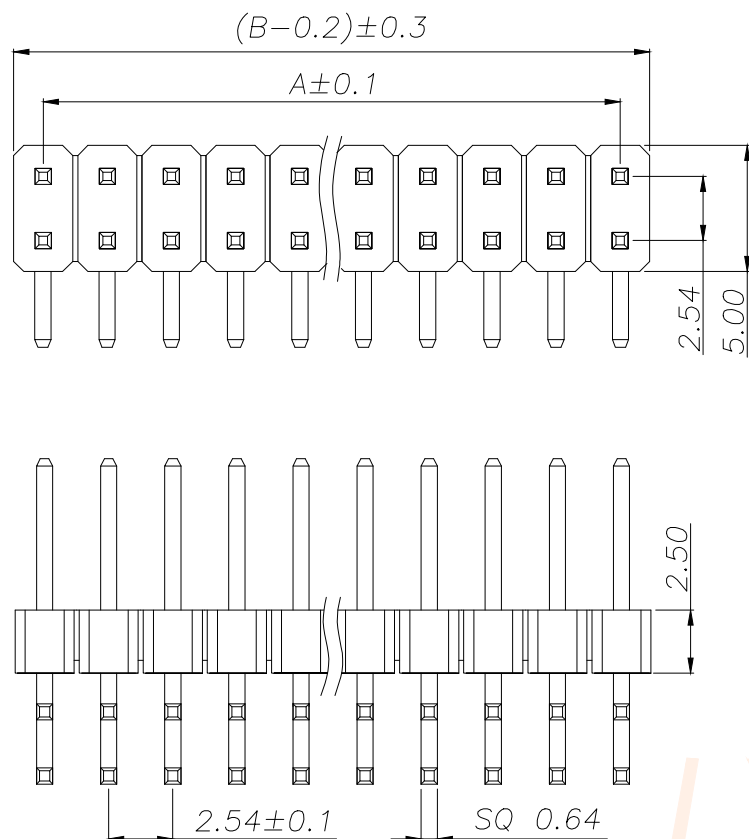

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for 30-60seconds
(260°C for 5seconds)

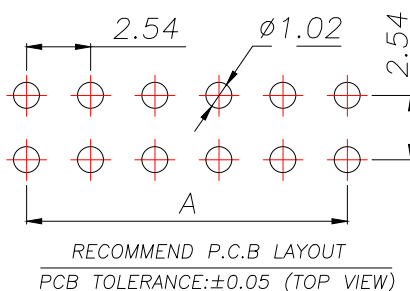

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
A254W12-0B2P51-H25A60	2*1	0.00	2.54
A254W12-0B4P51-H25A60	2*2	2.54	5.08
A254W12-0B6P51-H25A60	2*3	5.08	7.62
A254W12-0B8P51-H25A60	2*4	7.62	10.16
A254W12-0B10P51-H25A60	2*5	10.16	12.70
A254W12-0B12P51-H25A60	2*6	12.70	15.24
A254W12-0B14P51-H25A60	2*7	15.24	17.78
A254W12-0B16P51-H25A60	2*8	17.78	20.32
A254W12-0B18P51-H25A60	2*9	20.32	22.86
.....			
A254W12-0B80P51-H25A60	2*40	(40-1)X2.54	(40)X2.54

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO. A254W12-0BXP51-H25A60	TITLE: 2.54PH H2.5 2xPin 90度 PC3.0 PA6.0 PB6.9 L13.8/18.8 6T 壹四画		
.XX ±0.20	X.* ±1°				
.XXX ±0.10	X.XX ±0.5°				
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olivia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1