




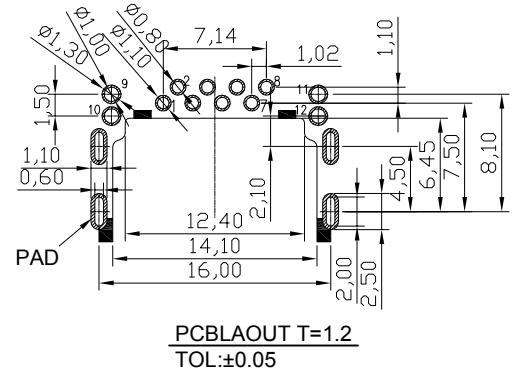


由Autodesk教育版产品制作

H

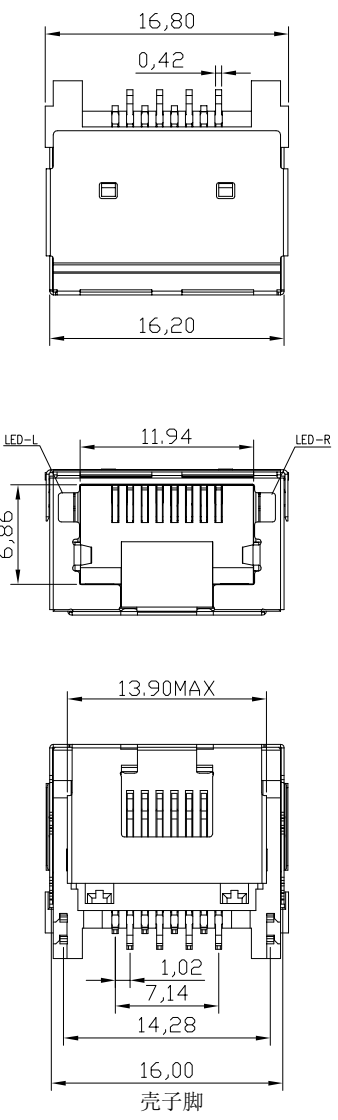

焊脚尺寸以顺畅过孔规为准

- NOTES
- MATERIAL
- 1. HOUSING MATERIAL : LCP BLACK UL94V-0.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.25mm.
 - 3. PLATING : GOLD AND TIN PLATING OVER NICKEL.
 - 4. SHIELD : BRASS WITH NICKEL PLATED.
- ELECTRICAL
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
 - 5. DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.
- MECHANICAL
- 1. DURRABILITY : 750 CYCLES MIN.
 - 2. MATING/UNMATING FORC: 2.24 KG.F MAX.
- ENVIRONMENTAL:
- 1. STORAGE : -40℃~+85℃.
 - 2. OPERATION : -40℃~+85℃.

3104 - 0 03 - XX

系列码
RJ45 UP 9.9H

类别码
03:4.1反向有壳左绿右黄

流水码
11:GF LCP黑 盘装
21:GF LCP黑 卷装

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.35	UNIT		MM				
				X.XX	±0.25	SIZE	A4	DESIGN	赵文品2024.11.06	PART NO.	RJ45-3104-003-11	
				X.XXX	±0.05							
				Angle	±2°	SHEET	1/1	CHECK		TITLE:	RJ45 9.9H反向沉板4.1有壳左绿右黄DIP GF LCP黑	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.		