

FEATURES

- Small volume, high power density
- High efficiency, low output ripple and noise
- Low zero-load power consumption, low static current
- Long time short circuit protection and self-recovery
- superior thermal stability and temperature characteristics
- Wide temperature performance at full 1 watt load: -40°C ~ +85°C
- Isolation Voltage: 1500VDC
- High Reliability (MTTF ≥ 350 ten thousand hours)
- International standard SIP package, save PCB installation space
- Environmental design, ROHS compliant
- 100% full load aging



RoHS
Isolate/Stabilize
Positive and negative output

PRODUCT MODEL LIST

Order Code	Nominal Input Voltage (V)		Nominal Input Voltage		Efficiency [Typ] (%)	Capacitive Load [Max] (uF)
	Nominal	Range	Voltage (V)	Current (mA)		
IA0505S-2W	5	4.75~5.25	±5	±200	62	2200
IA0509S-2W			±9	±111	64	1000
IA0512S-2W			±12	±83	68	1000
IA0515S-2W			±15	±67	68	1000
IA1205S-2W	12	11.4~12.6	±5	±200	64	2200
IA1209S-2W			±9	±111	66	2200
IA1212S-2W			±12	±83	68	1000
IA1215S-2W			±15	±67	68	1000
IA2405S-2W	24	22.8~25.2	±5	±200	70	2200
IA2409S-2W			±9	±111	66	2200
IA2412S-2W			±12	±83	67	2200
IA2415S-2W			±15	±67	66	1000
IA2424S-2W			±24	±42	70	680

Ps : *The positive and negative output capacitive loads are the same.

OUTPUT CHARACTERISTICS

Parameter	Conditions		Min.	Typ.	Max.	Units
Output Power			0.2		2	W
Line Voltage Regulation	Input voltage change $\pm 1\%$ at rated load				± 0.5	%
Load Regulation	Load varies from 10% to 100% at nominal input				± 2	
Output voltage accuracy	100% load				± 3	
Quiescent Current	Output load is 0 at nominal input	IA05XX	≤ 20			mA
		etc.	≤ 10			
Temps Drift Coefficient	Rated load				± 0.03	%/ $^{\circ}\text{C}$
Ripple & Noise	At 20MHz bandwidth			30	60	mVp-p
Switching Frequency	Rated input voltage			280		KHz
Output Short Circuit Protection	Sustainable and automatic restoration					
Input Filter	Filter capacitor					
Hot Plug	Nonsupport					

Insulation Characteristic


Parameter	Conditions	Min.	Typ.	Max.	Units
Insulation Resistance	500VDC	1000			MΩ
Insulation Voltage	Test time 1 minute, leakage current less than 1 mA	1500			VDC

All Specifications Subject To Change Without Notice


Guangzhou Jetekps Electronic Co., Ltd Tel:020-32029926 Fax:020-32029926 www.jetekps.com

General Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage Humidity		5		95	%
Operating Temps		-40		85	°C
Storage Temps		-55		125	
Operating Case Temps			15	25	
Pin Welding Temps	Welding joint 1.5mm from case,10 seconds operation			300	
MTTF	MIL - HDBK - 217@25°C	350			10000 hours
Weight			4.7		g
Cooling	Free air convection				
Case Material	Flame-retardant and heat-resistant plastic (UL94-V0)				




Shape & Pin Dimensions

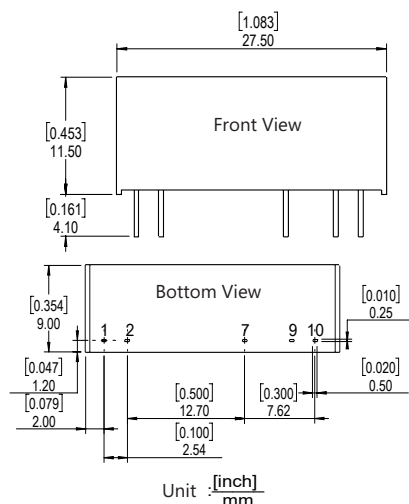


Pin	Function
1	Vin
2	GND
7	+Vo
9	-Vo
10	0V

ps:
Terminal section tolerance: ± 0.10 [± 0.004]
Unmarked tolerance: ± 0.25 [± 0.010]


PCB



Package Dimensions



Basic Application Circuit

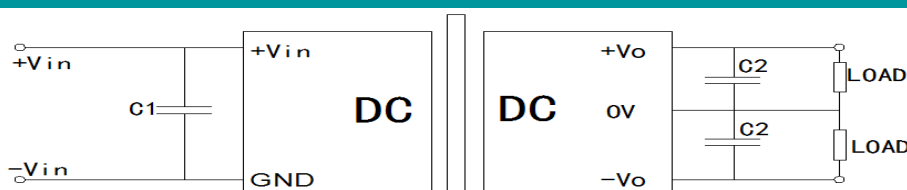

All Specifications Subject To Change Without Notice

Guangzhou Jetekps Electronic Co., Ltd Tel:020-32029926 Fax:020-32029926 www.jetekps.com

Options of C1、C2:

Input Voltage	External Capacitance	Output Voltage	External Capacitance
5VDC	4.7uF	±5VDC	4.7uF
12VDC	2.2uF	±9VDC	2.2uF
24VDC	0.47uF	±12VDC	1uF
---	---	±15VDC	0.47uF
---	---	±24VDC	0.47uF


Note

Try To Avoid No-load Use: If the load power consumption is less than 10% of the rated output power of the module, it is recommended to connect a dummy load to the output terminal or select a module with a lower rated power. The dummy load (resistance) can be calculated by 10% of the rated power of the module, and the resistance value is $R=U^2 / (10\% \times 2W)$.

Avoid Excessive Output External Capacitance: The capacity value of the output external capacitor C2 should not be too large, otherwise it is easy to cause overcurrent or bad startup when the module is started. The specific value should be selected according to the external capacitor table.

The input of this series does not support parallel use of hot plug and output.

For situations requiring high ripple noise, external LC filter circuit should be connected, and the resonant frequency of LC filter should be far less than the switching frequency of DC/DC module to prevent mutual interference, resulting in output ripple increase or module damage, as shown in the figure:

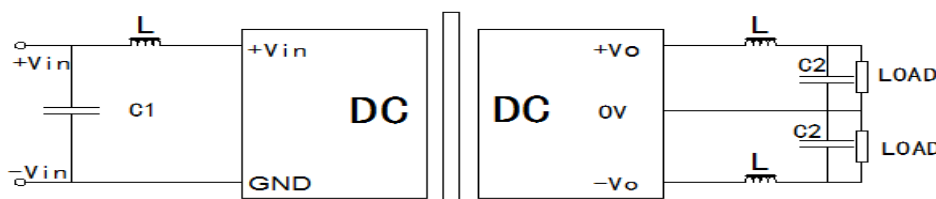

Naming Logic Of Constant Voltage Products

B 05 05 LS Y-1W R1

