

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LXC 06/12/10'		L P 06/12/10'

Housing: Thermoplastics, UL94V-0

Contact: Copper Alloy

Shell: Steel





Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000M Ω Min.


Contact Resistance: 30 m Ω Max.


Dielectric Withstanding Voltage: 500V AC

Temperature Range: -55 $^{\circ}$ C to +85 $^{\circ}$ C

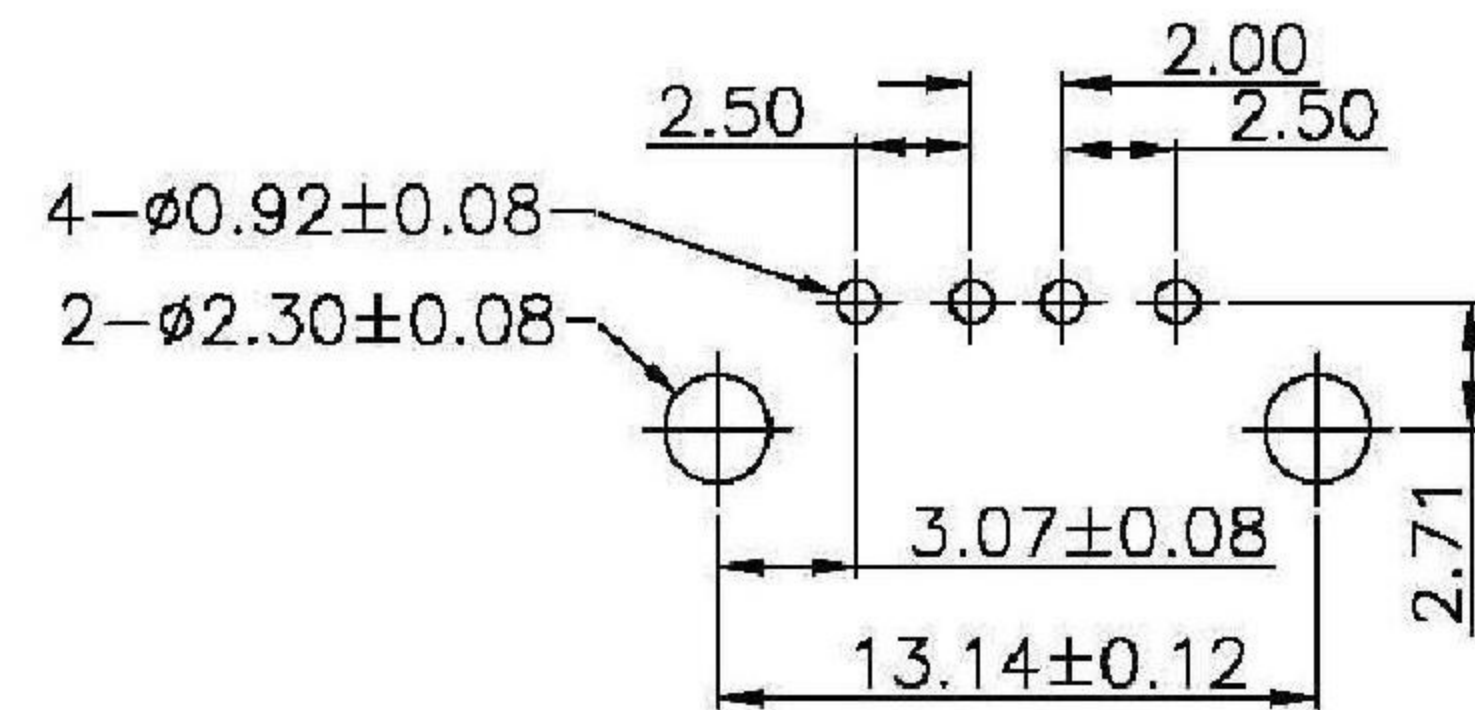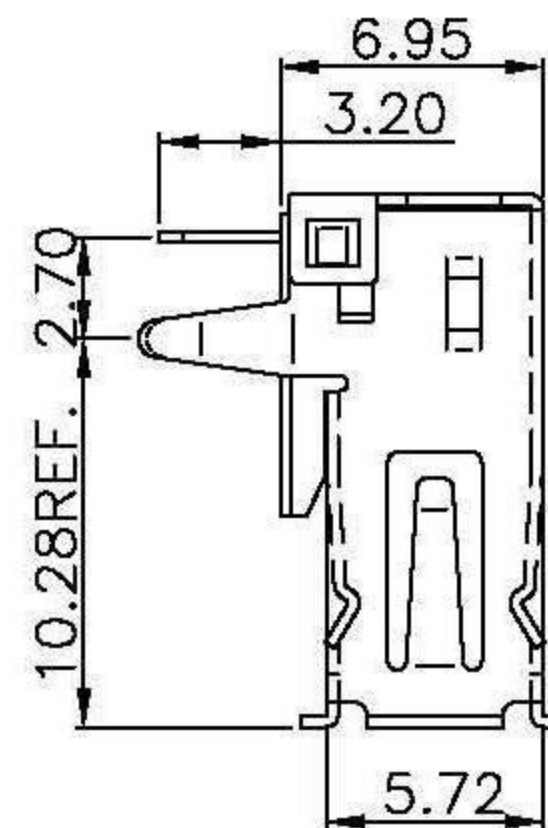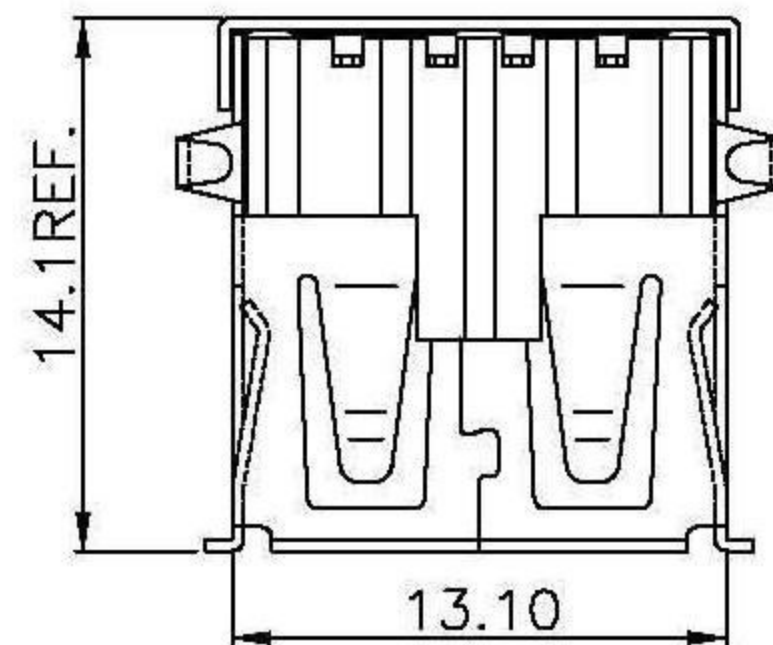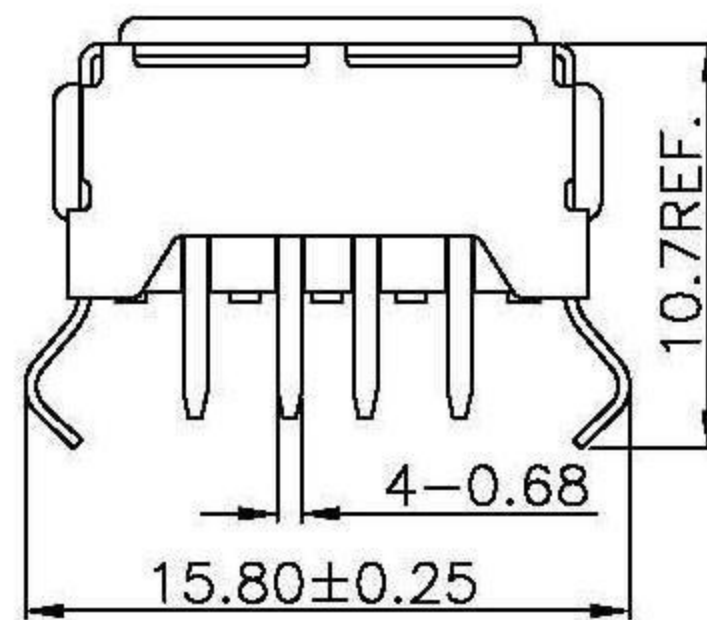

PC BOARD LAYOUT

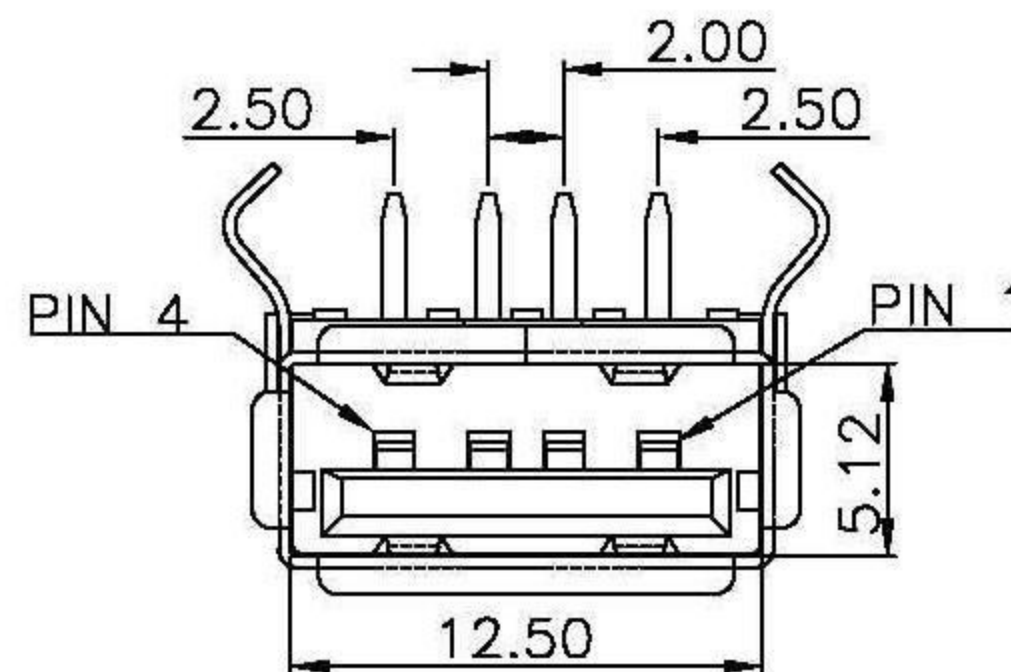

GENERAL TOLERANCE		ANGLE TOLERANCE		L&X 深圳市连欣科技有限公司			
X.	±0.25	X.	±3 $^{\circ}$	PROJECTION		TITLE	USB AF 90 $^{\circ}$ DIP 有后盖 弯脚
.X	±0.20	.X	±1 $^{\circ}$	UNITS	mm		
.XX	±0.10	.XX		SHEET SIZE	A4	PART NO	XDUF-0242-05
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-YQ-USB-0000						