


RV-3029-C2

Real-Time Clock Module with I²C-Bus




DIMENSIONS

Package:

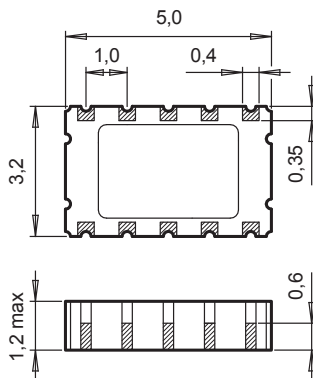

Recommended Solder Pad:



All dimensions in mm typical

APPLICATIONS

IoT
Metering
Industrial
Portables
Automotive
Health Care


DESCRIPTION

The RV-3029-C2 is a SMT Real-Time Clock Module that incorporates an integrated CMOS circuit together with an XTAL. It operates under vacuum in a hermetically sealed ceramic package with glass lid.

FEATURES

Low power consumption: 800 nA @ 3 V.
Wide operating voltage range: 1.3 V to 5.5 V.
Time accuracy, temp. compensated: Option A: -40 to +85°C, ±6 ppm, Option B: -40 to +85°C, ±25 ppm.
Extended operating temperature range: -40 to +125°C.
Automatic Backup Switchover and Trickle Charger function.
Provides year, month, weekday, date, hours, minutes and seconds.
Timer and Alarm functions.
Clock output frequencies: 32.768 kHz, 1024 Hz, 32 Hz, 1 Hz.
2 bytes non-volatile user memory, 8 bytes user RAM.
I²C-bus interface: 400 kHz.
100% Pb-free, RoHS-compliant.
Automotive qualification according to AEC-Q200 available.

BLOCK DIAGRAM

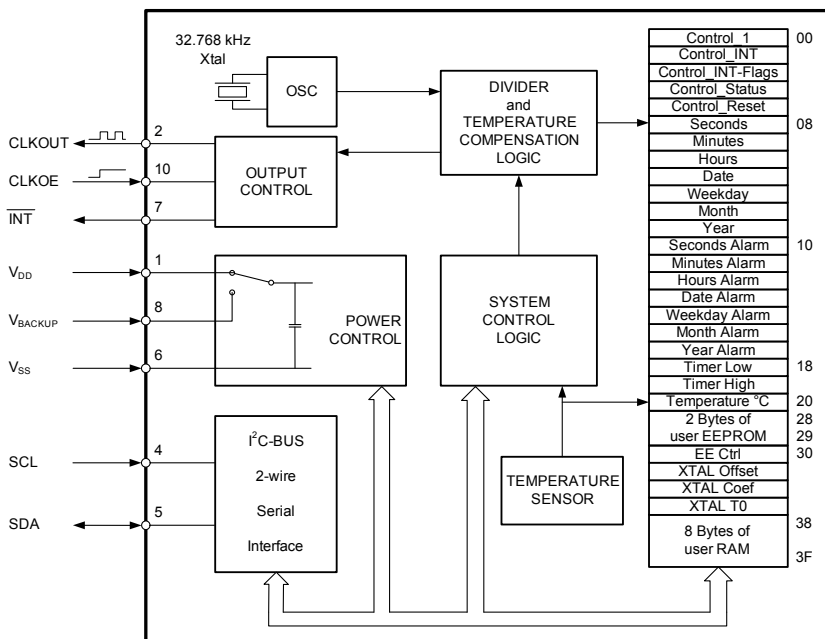

ELECTRICAL CHARACTERISTICS
AT 25°C

More detailed information can be found in the Application Manual.

ENVIRONMENTAL
CHARACTERISTICS

TERMINATIONS AND
PROCESSING

FREQUENCY TEMPERATURE
CHARACTERISTICS


PIN CONNECTIONS
TOP VIEW

ORDERING INFORMATION

	Symbol	Condition	Min.	Typ.	Max	Unit
Supply voltage	V _{DD}	Time keeping	1.3		5.5	V
Supply voltage	V _{DD}	Thermom. active	2.1		5.5	V
Current consumption Time keeping mode	I _{DDO}	I ² C-bus inactive, V _{DD} = 3 V		800	1000	nA
Time acc. Opt. A / B	Δt/t	-40 to +85°C	±6 / ±25			ppm
Aging first year max.	ΔF/F	@ 25°C	±3			ppm

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
TB Extended oper. temp. range		-40 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	±5 ppm

Package	Termination	Processing
SON-10	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

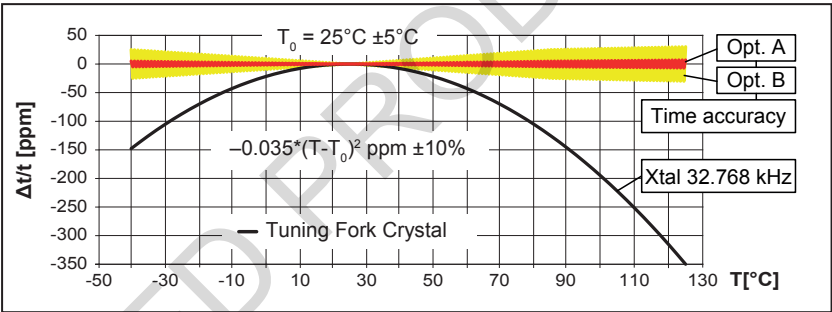

Pin	Connection
1	V _{DD} Power Supply Voltage
2	CLKOUT Clock Output
3	NC Not connected
4	SCL Serial Clock Input
5	SDA Serial Data
6	V _{SS} Ground
7	INT Interrupt Output
8	V _{BACKUP} Backup Supply Voltage
9	NC Not connected
10	CLKOE Clock Output Enable

RV - 3029 - C2	Option A	TA	QC
RTC module			Qualification
Product type			QC = Commercial Grade (Standard)
Package size			QA = Automotive Grade AEC-Q200
C2 = 5.0 x 3.2 x 1.2 mm			Temperature range
Time accuracy			TA = -40 to +85°C (Standard)
Option A = ±6 ppm @ -40°C to +85°C			TB = -40 to +125°C
Option B = ±25 ppm @ -40°C to +85°C			
A unique part number will be generated for each product specification, i.e:			
20xxxx-MG01	1'000 pcs (in 12 mm tape on 7" reel)		
20xxxx-PG05	5'000 pcs (in 12 mm tape on 13" reel)		

All specifications subject to change without notice.



A COMPANY OF THE SWATCH GROUP

Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
sales@microcrystal.com
www.microcrystal.com