

MAN2450C32

2.4GHz 3216 Chip Antenna



Applications

1. 2.4 GHz WiFi, Zigbee, Bluetooth device
2. ISM band equipment

Features

1. Compact size
2. Omni-directional radiation
3. Tape & reel automatic mounting
4. RoHS compliance (Pb-Free)



Description

The MAN2450C32 is designed for superior performance, and can be widely used for wireless applications. We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Electrical Specification

Table 1. MAN2450C32 Electrical Specification

Item	Min.	Type.@25°C	Max.	Unit
Frequency Range	2400		2500	MHz
VSWR	1.0		2.5	:1
Efficiency		75		%
Peak Gain		1.89		dB
Polarization		Linear		
Nominal Impedance		50		Ω

Mechanical Specifications

Table 2. MAN2450C32 Mechanical Specification

Item	Min.	Type.@25°C	Max.	Unit
Antenna Size		3.2*1.6* 0.5		Mm
Temperature	-40		+80	°C
Operating temperature	-40		+80	°C

All Use For RF & Microwave


MAN2450C32

2.4GHz 3216 Chip Antenna

MECSINE 兆讯

Outline Drawing


Figure 1. MAN2450C32 View (Unit: mm)

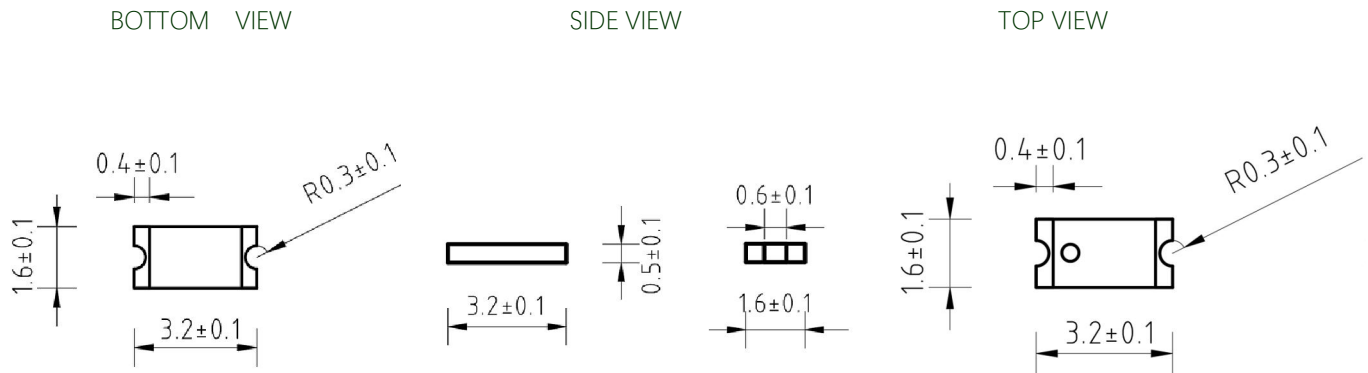

Unit: mm

Recommend PCB Layout

Figure 2. MAN2450C32 PCB Layout (Unit: mm)

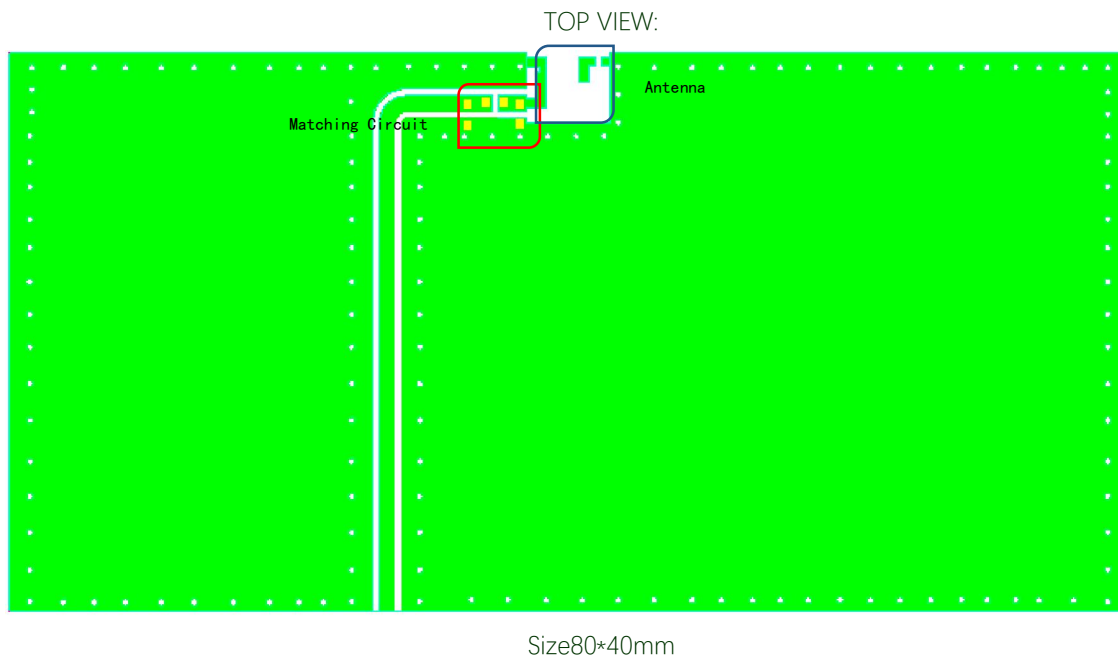

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information


Ju 09, 2022

2.4GHz 3216 Chip Antenna

MECSINE 快讯


Figure 3.MAN2450C32 PCB Layout (Unit: mm)

BOTTOM VIEW

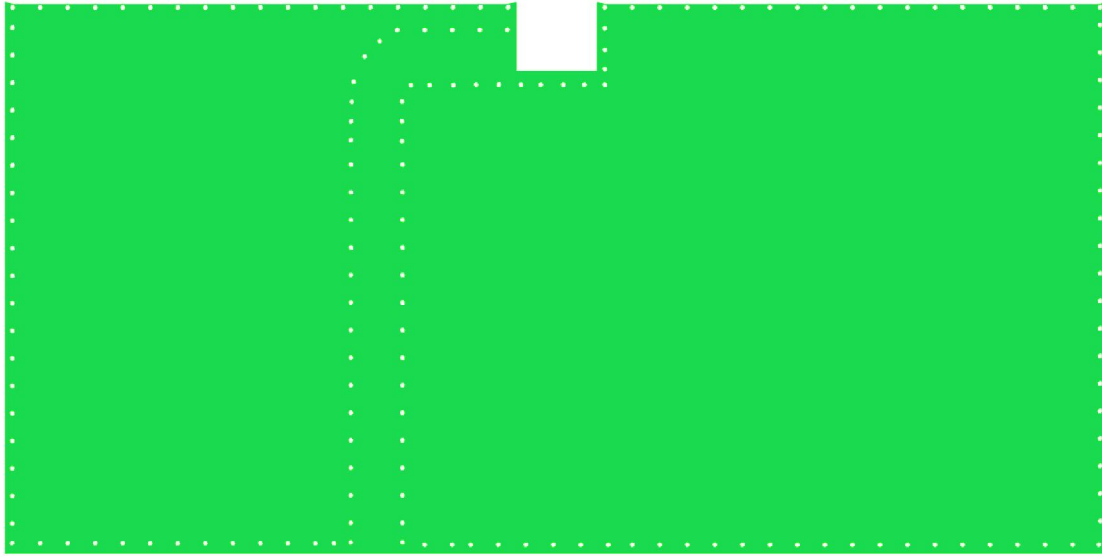

Size80*40mm

Figure 4. MAN2450C32 Antenna Layout (Unit: mm)

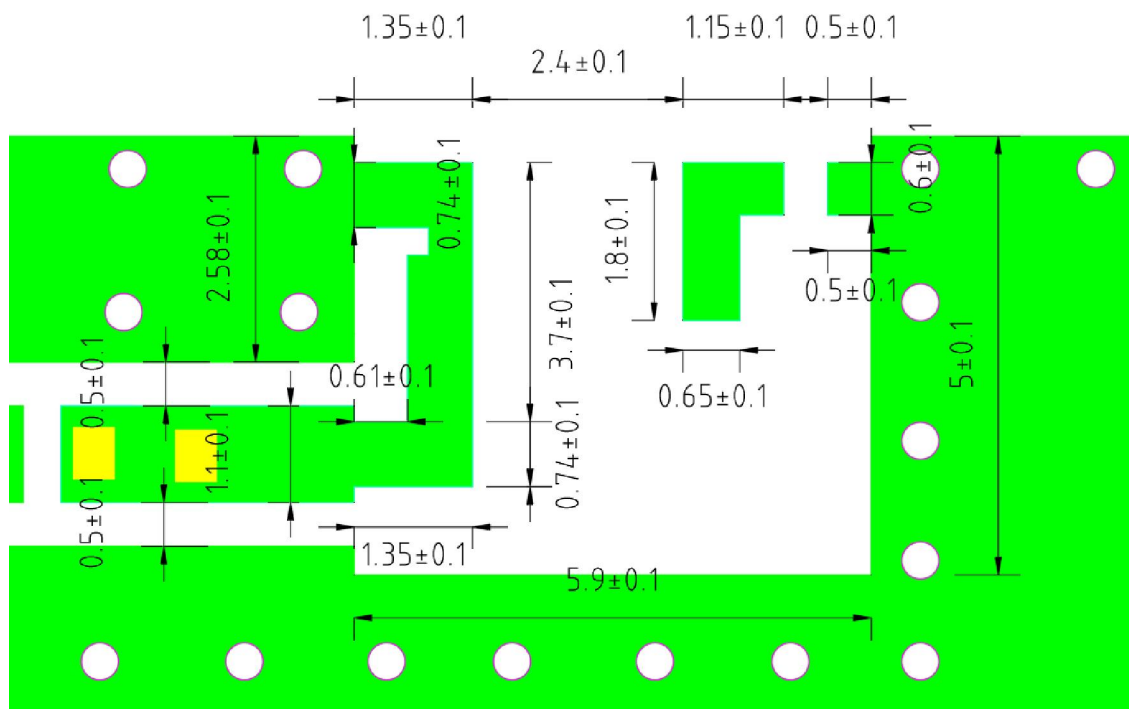


All Use For RF & Microwave

MAN2450C32

2.4GHz 3216 Chip Antenna


MECSINE 兆讯

Figure 5. MAN2450C32 Foot Print (Unit: mm)

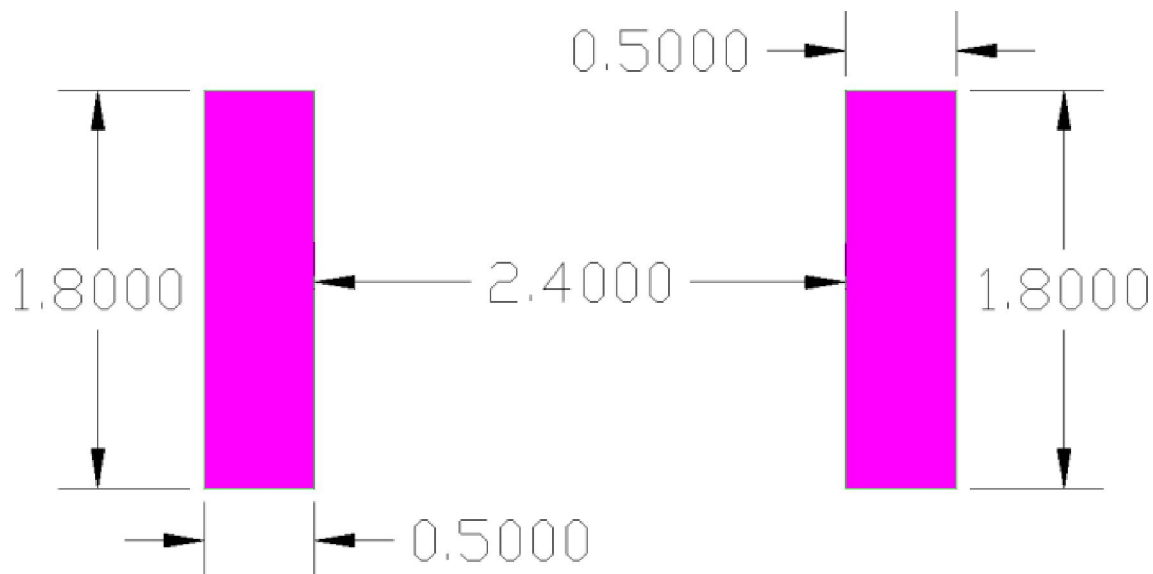

Typical Performance

Figure6. MAN2450C32 VSWR

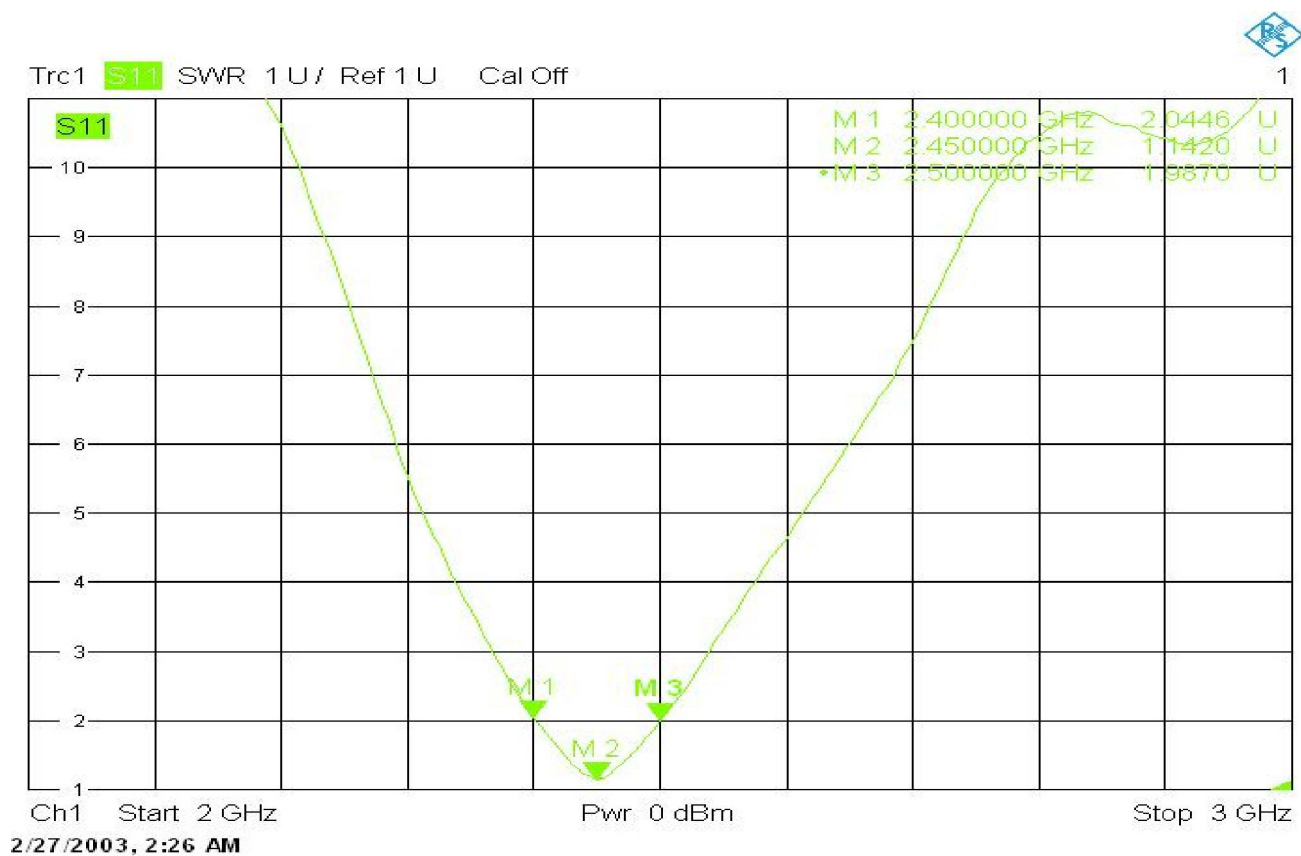

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information


Ju 09, 2022

MAN2450C32

2.4GHz 3216 Chip Antenna


MECSINE 兆讯

Figure 7. MAN2450C32 Return Loss

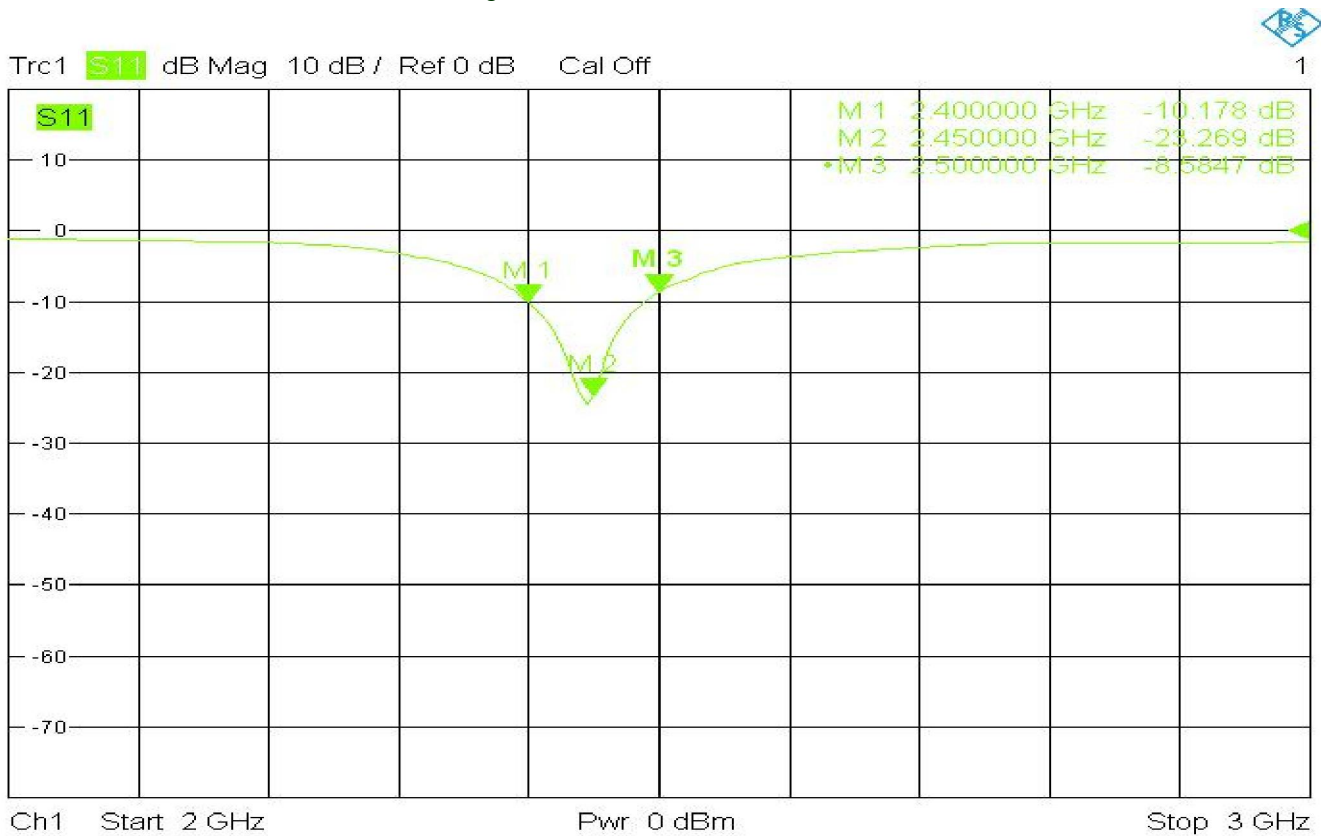

Radiation Pattern& Efficiency&Peak Gain

Figure 8. The Gain pattern is measured in FAR-field chamber

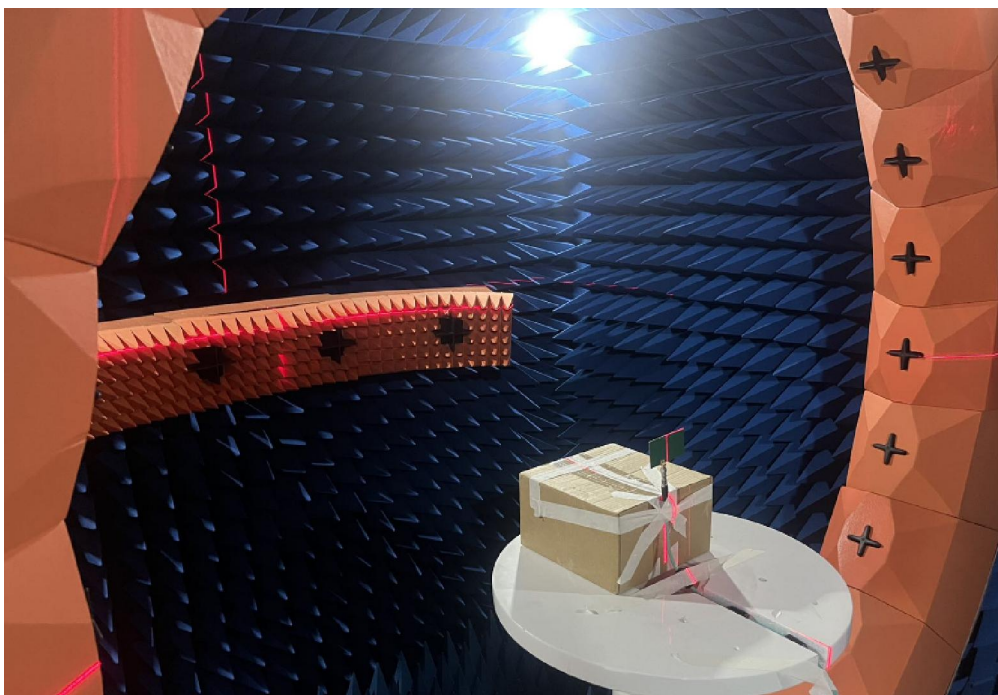

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information

Ju 09, 2022



MAN2450C32

2.4GHz 3216 Chip Antenna



Table 3. MAN2450C32 Radiation Efficiency&Peak Gain

Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Efficiency(%)	69.24	71.01	74.87	75.82	77.12	79.45	75.82	78.61	74.71	76.31	71.31
Peak Gain (dB)	1.62	1.31	1.74	1.51	1.67	1.72	1.59	1.89	1.36	1.6	0.96
Avg. gain(dB)	-1.6	-1.49	-1.26	-1.2	-1.13	-1	-1.2	-1.05	-1.27	-1.17	-1.47

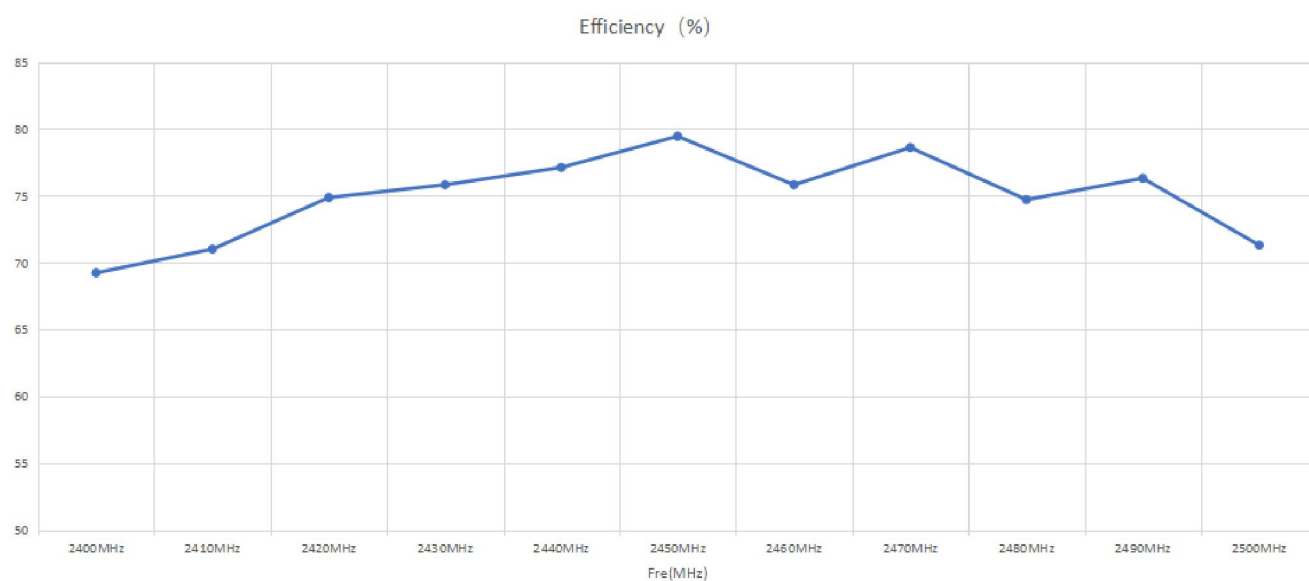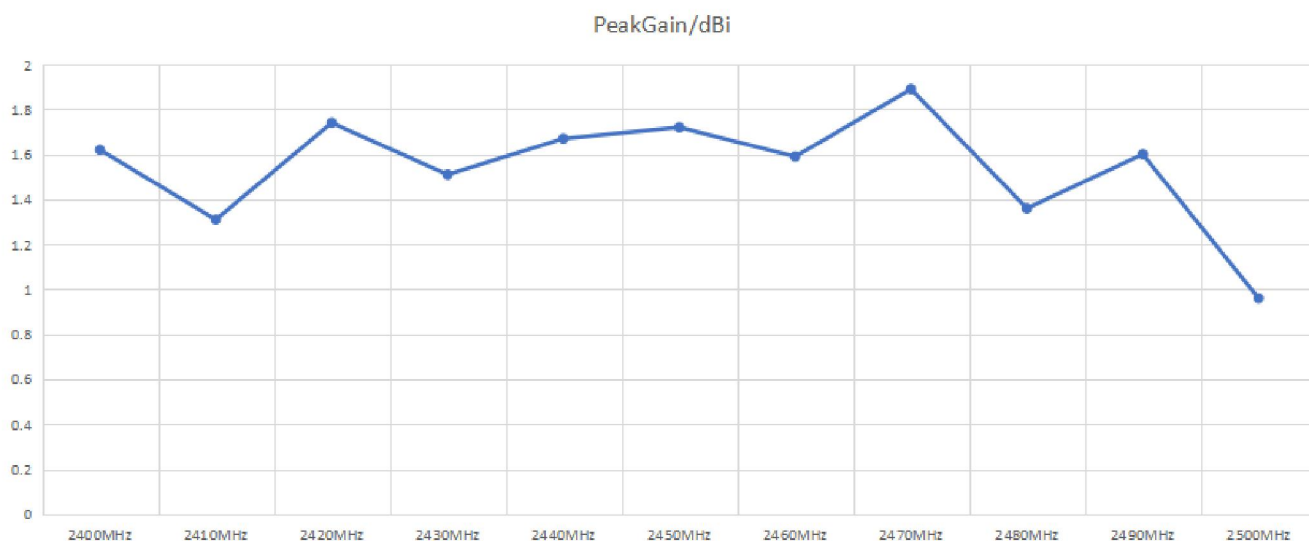

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information


Ju 09, 2022

MAN2450C32

2.4GHz 3216 Chip Antenna


MECSINE兆讯

Figure 9. Radiation Pattern

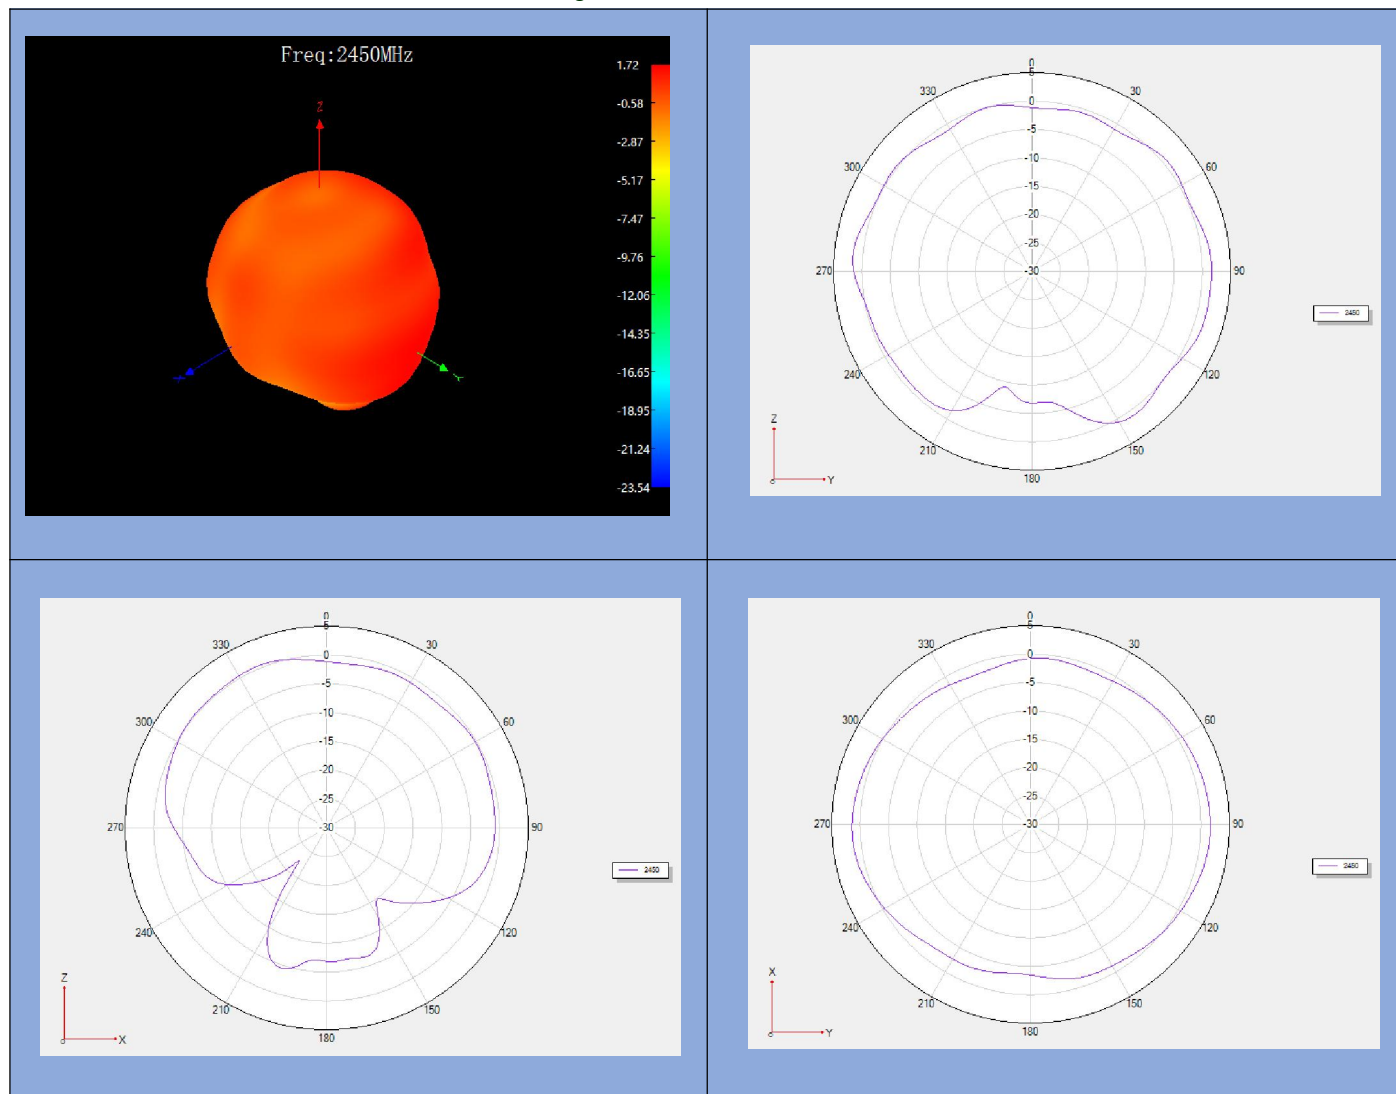

The Efficiency for Different Location

Figure 10. MAN2450C32 Different Location

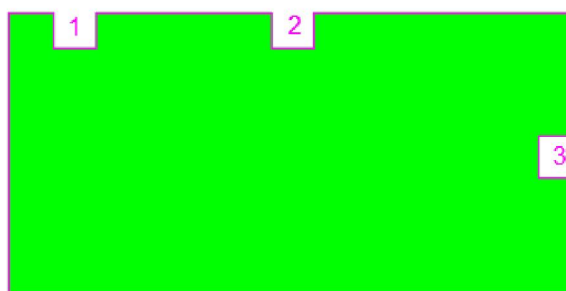


All Use For RF & Microwave

MAN2450C32

2.4GHz 3216 Chip Antenna



Table 4. MAN2450C32 Radiation Efficiency With Different Layout

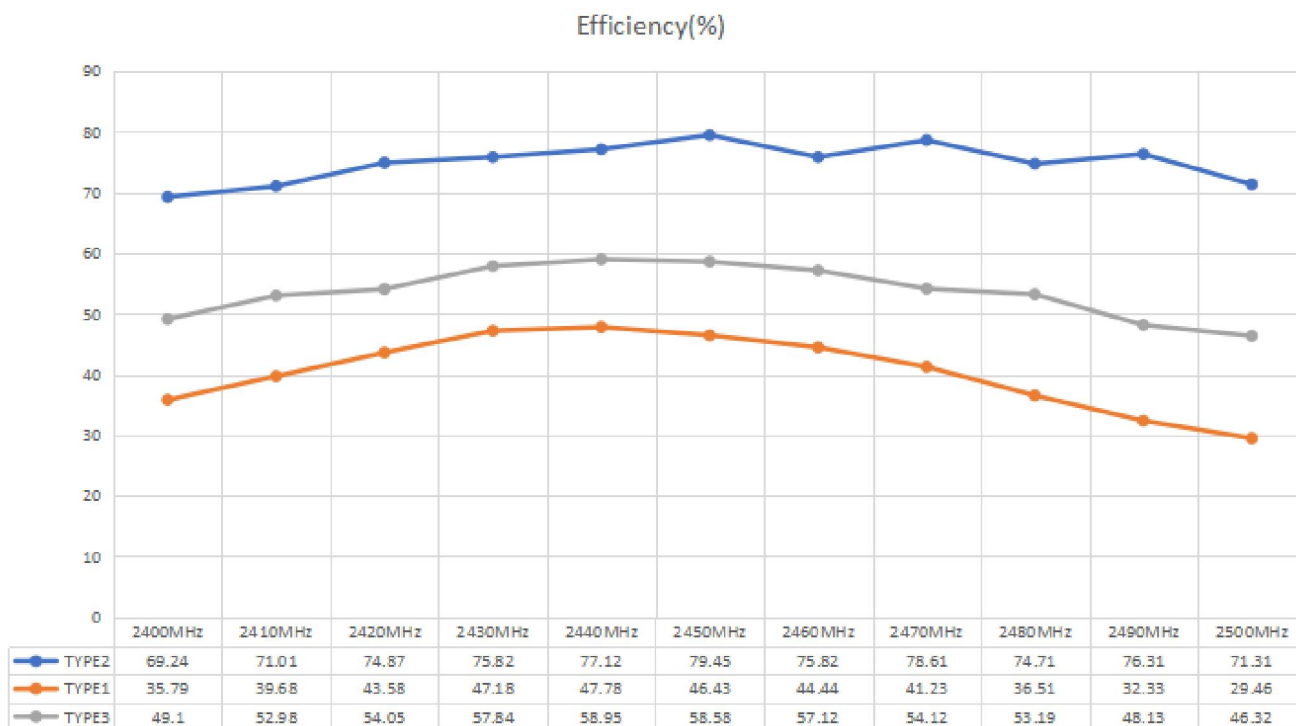

*Antenna performance will also change in different environments, it is recommended to consult the relevant technical personnel before use to confirm the layout to ensure good performance.

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information

Ju 09, 2022

MAN2450C32

2.4GHz 3216 Chip Antenna

MECSINE 兆讯

Packaging and Ordering Information

Figure 9. Packaging Information

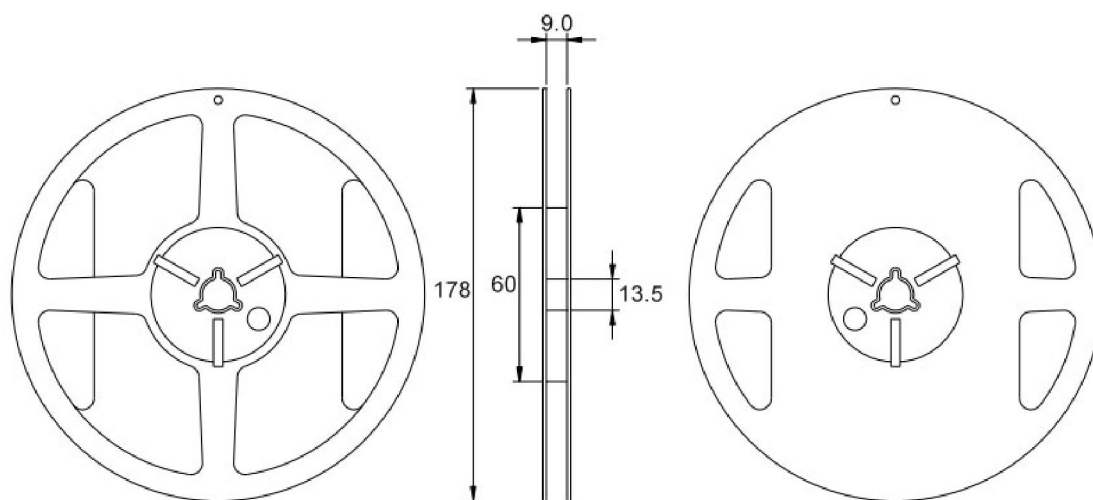
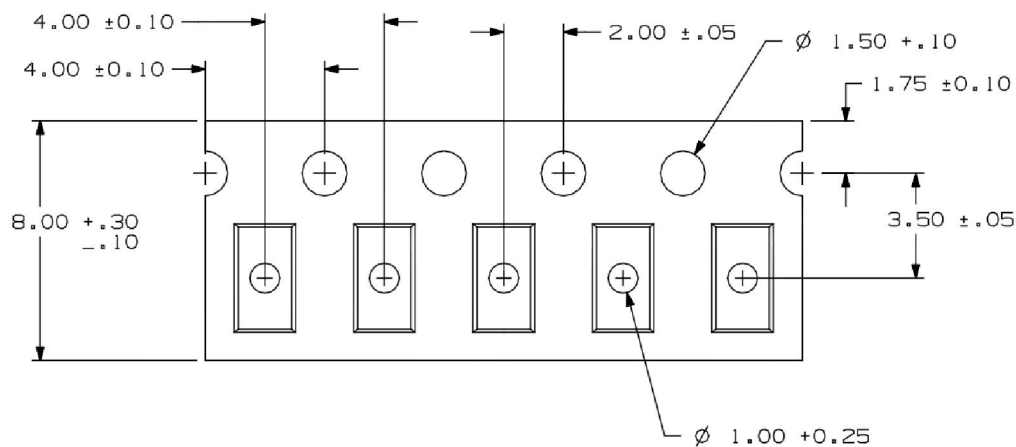


Table4. Packaging and Shipping

Device	Packaging	Reel	Shipping
MAN2450C32	SMD	7"	3000/Reel

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com You may contact us for future information

Ju 09, 2022

MAN2450C32

2.4GHz 3216 Chip Antenna



Revision	Description	Date
Rev0	Preliminary	2023/3/7

All Use For RF & Microwave