
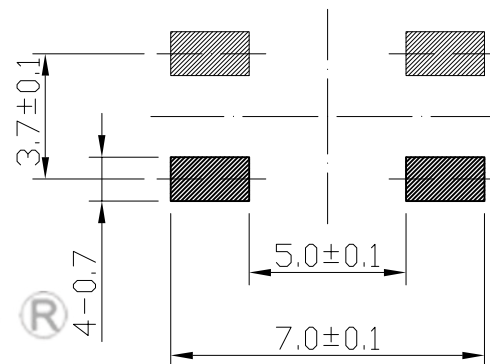
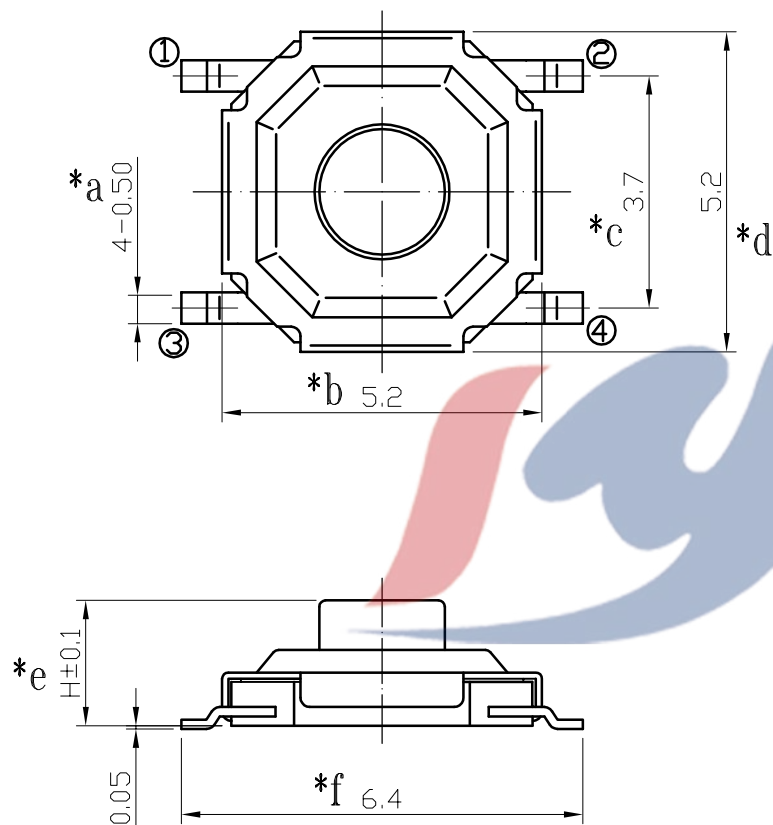



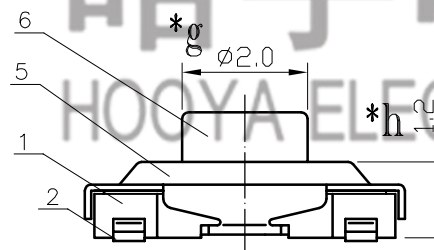


SCHEMATIC

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: $\leq 100m\Omega$.
- 3.Insulation resistance: $\geq 100M\Omega$ (DC100V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: 120gf
- 6.Travel: $0.15\pm 0.1mm$.
- 7.life test: 10,000 cycles.
- 8.Operation temperature range: $-25^{\circ}C \sim 85^{\circ}C$.
- 9.Sign"* "is importance dimension.

H=XXmm

					TOLERANCE UNLESS SPECIFIED								
6	STEM	BRASS	1		<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	A1	2024.4.9	△ 按实物增加材质PI膜/盖子无电镀			MLQ	
5	COVER	SUS	1	△			NO	DATE	REVISIONS			BY	APPD
4	TAPE	PI △	1	YELLOW	TITLE: TACT SWITCH			UNIT : MM		ROHS	DWN		
3	CONTACT	SUS	1	Ag-Plated	MODEL: TS-1187-015A			SCALE: 1:1		COMPLIANT	CHK'D		
2	TERMINAL	BRASS	4	Ag-Plated	 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 HOOYA 东莞市弘皓电子有限公司			APPD					
1	HOUSING	LCP	1	BLACK				PRO.AGL:  		REV :A1			
NO.	PART	NAME		MATERIAL	QTY	FINISHING							