

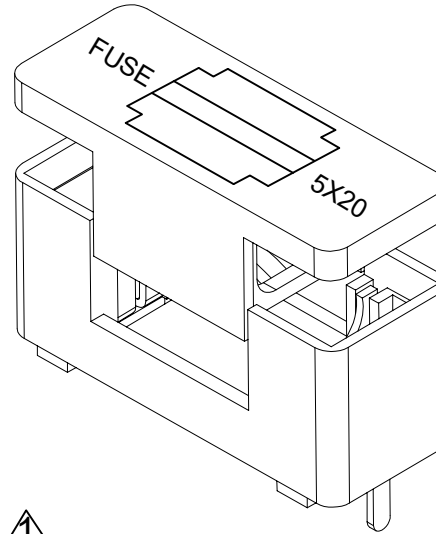
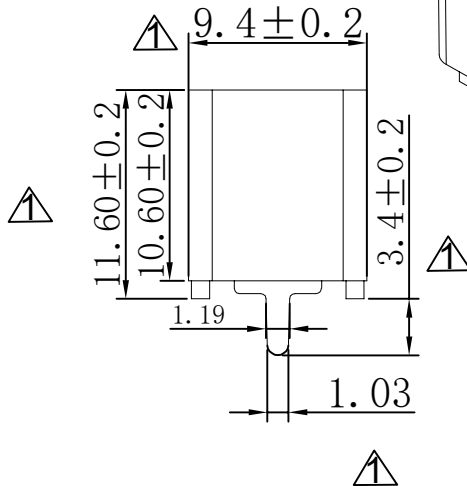
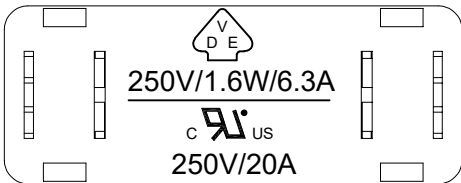


RoHS

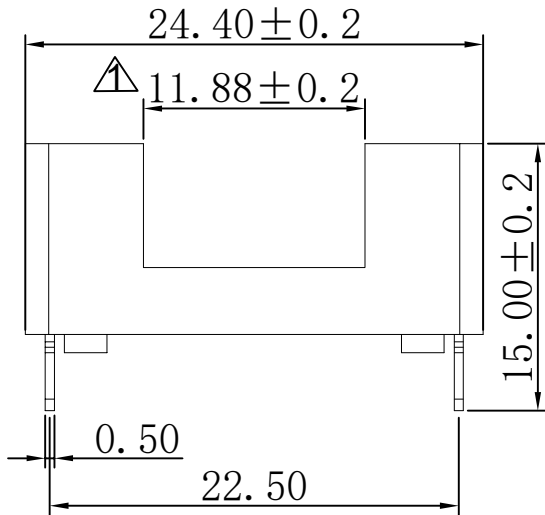

3D REFER TO

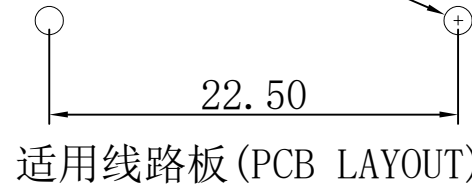

适用线路板 (PCB LAYOUT)

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA66
FLAMMABILITY RATING: UL94V0
COLOR: GREEN
CONTACT / PLATING: Phosphor bronze / Ni+Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 20A
WORKING VOLTAGE: 250VAC
WITHSTANDING VOLTAGE: 1.5KV
RATED POWER ACCEPTANCE: ---
PROTECTION CLASS: I o II
CONTACT RESISTANCE: 5/10 mΩ MAX

MECHANICAL
FUSE-LINK: 5x20 mm
PROTECTION RATE: IP00
SHOCKSAFE CATEGORY: PC1

X.±0.50	X.°±	PART NO: PTF-77		XFCN 兴飞连接器		
.X±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 保险管座盒含盖 5x20 脚距22.50mm 绿色		0769-82001899		
.XXX±0.10	.XXX°±			www.xfconn.com		
UNITS:	mm			DWG NO: /		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang			
		CHKD	Liu Wei	VIEW		
		DRAW	Chen HongJiang	SCALE	SHEET	REV
		DATE	2024.05.25	NONE	1/1	A2