


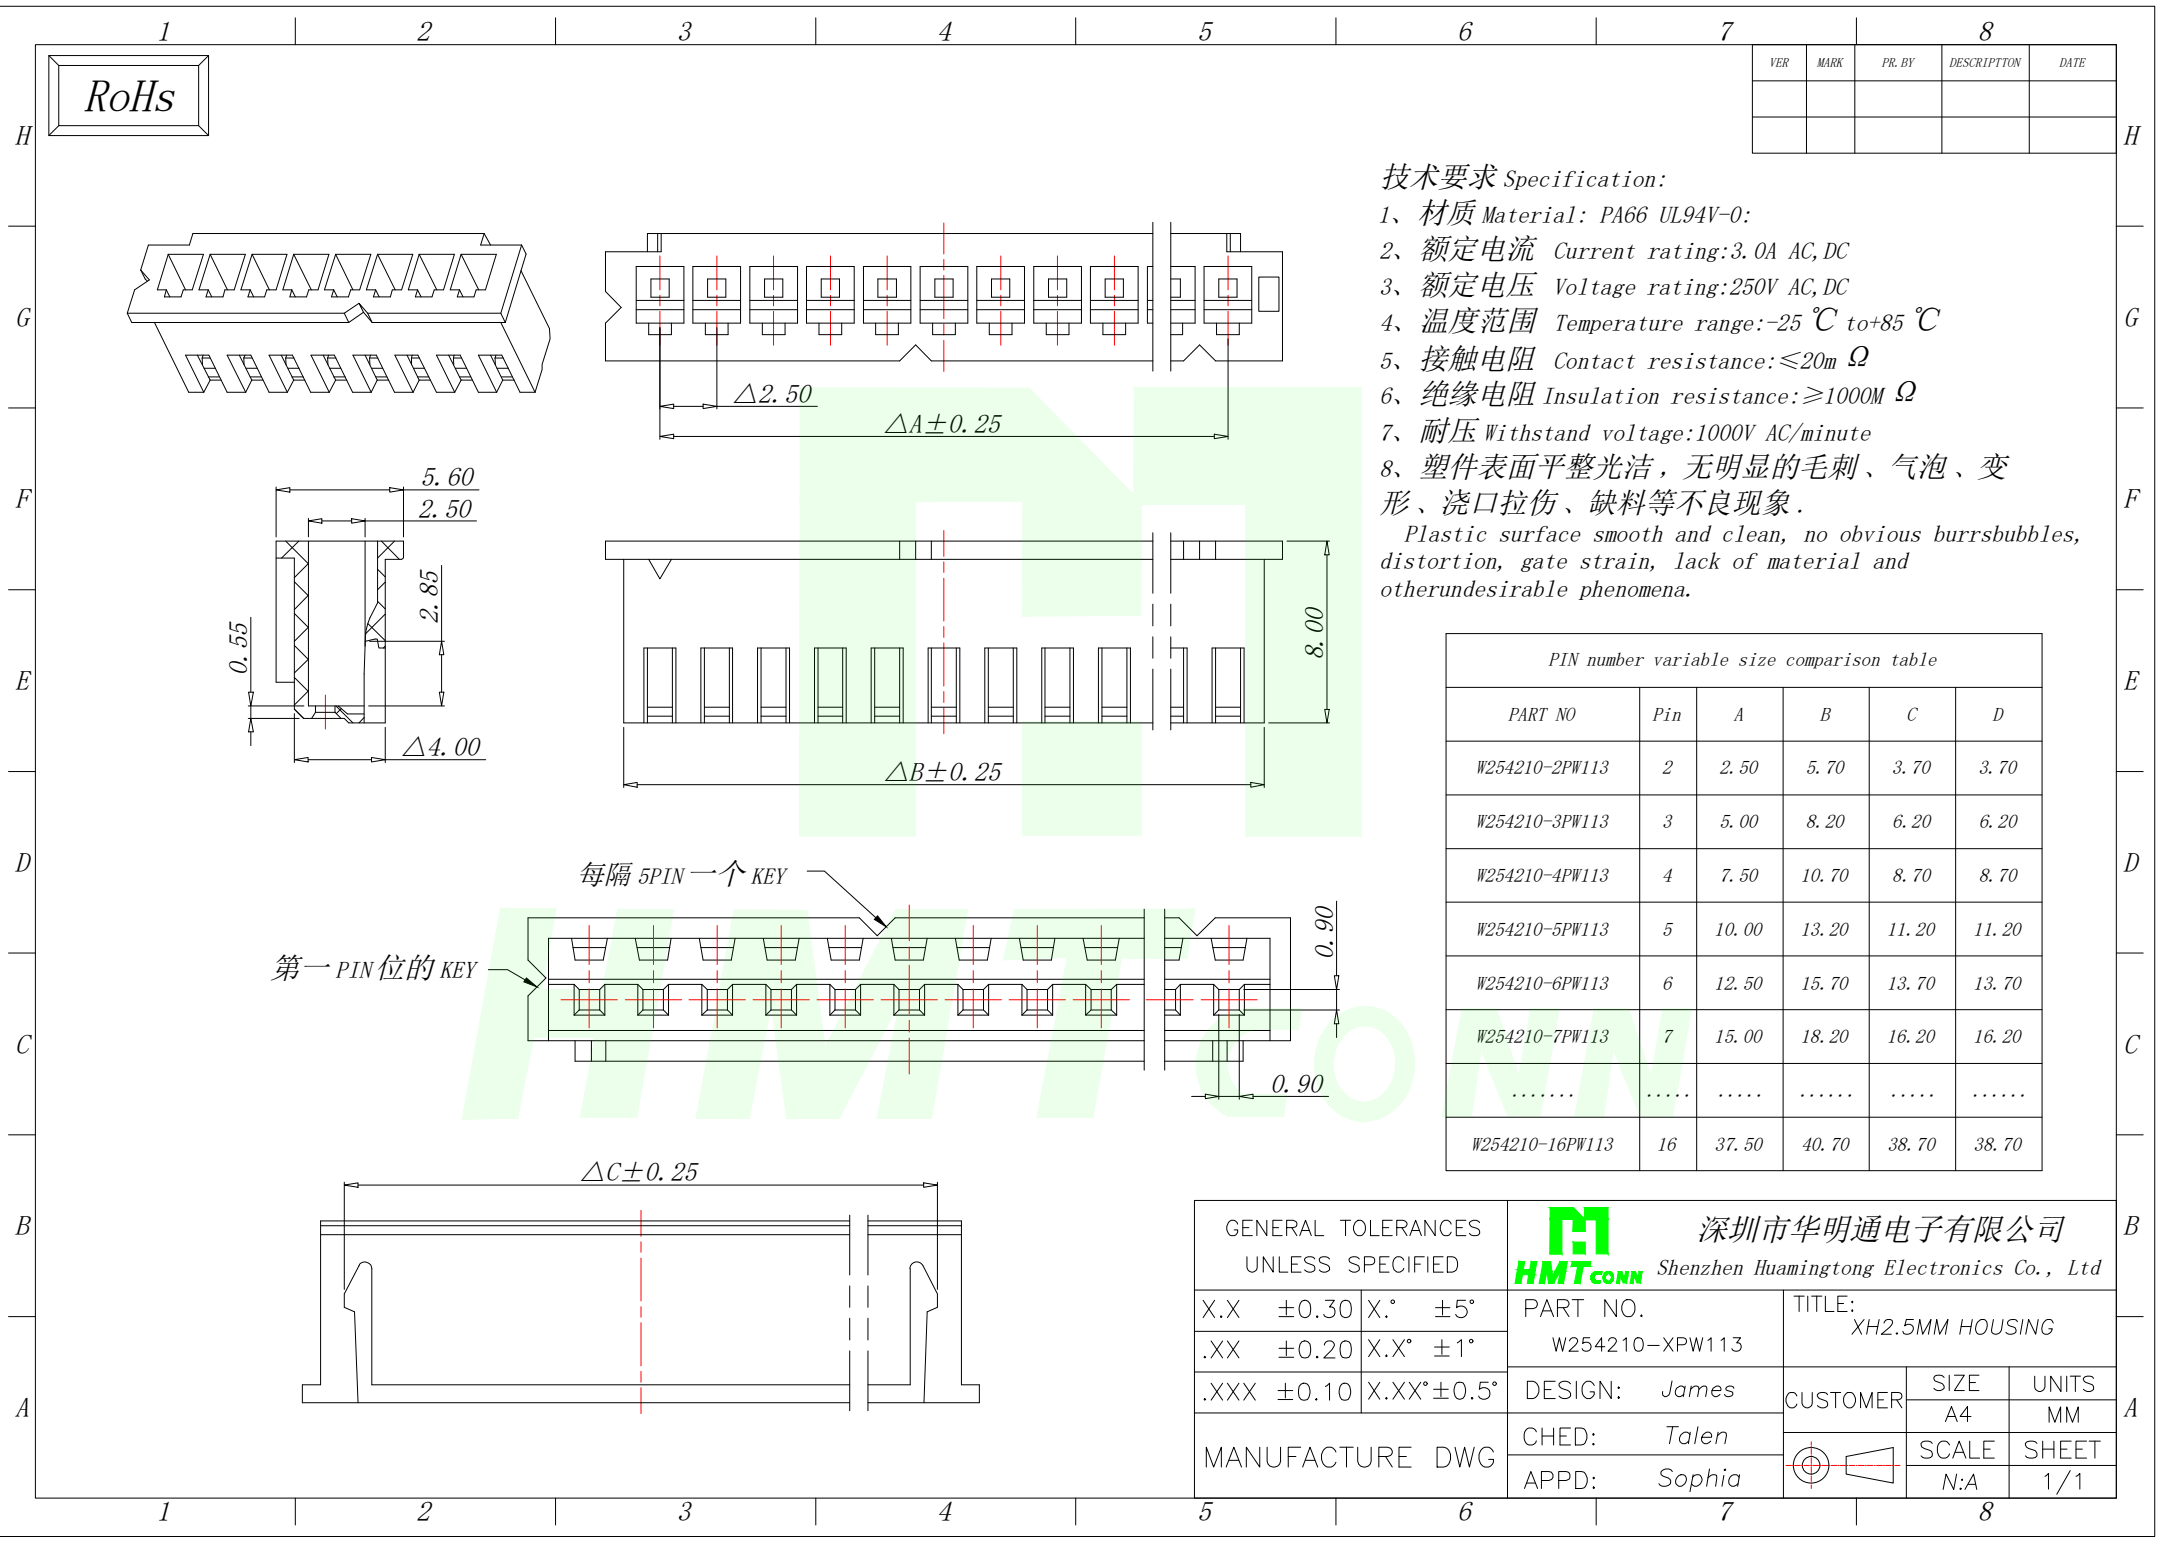


VER	MARK	PR. BY	DESCRIPTION	DATE

技术要求 Specification:

- 1、材质 Material: PA66 UL94V-0;
2、额定电流 Current rating:3.0A AC,DC
3、额定电压 Voltage rating:250V AC,DC
4、温度范围 Temperature range:-25℃ to+85℃
5、接触电阻 Contact resistance:≤20mΩ
6、绝缘电阻 Insulation resistance:≥1000MΩ
7、耐压 Withstand voltage:1000V AC/minute
8、塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。
Plastic surface smooth and clean, no obvious burrsbubbles, distortion, gate strain, lack of material and otherundesirable phenomena.

PIN number variable size comparison table					
PART NO	Pin	A	B	C	D
W254210-2PW113	2	2.50	5.70	3.70	3.70
W254210-3PW113	3	5.00	8.20	6.20	6.20
W254210-4PW113	4	7.50	10.70	8.70	8.70
W254210-5PW113	5	10.00	13.20	11.20	11.20
W254210-6PW113	6	12.50	15.70	13.70	13.70
W254210-7PW113	7	15.00	18.20	16.20	16.20
.....					
W254210-16PW113	16	37.50	40.70	38.70	38.70

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO. W254210-XPW113		TITLE: XH2.5MM HOUSING	
.XX ±0.20	X.X° ±1°				
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia			SCALE
				N:A	1/1