

标 记
MARK

ECN编号/变更内容
ECN NO/DEFINITION

修 改
REVISE

日 期
DATE

核 准
APPROVE

A

B

C

D

E

F

G

A

B



C

D

E



F

G

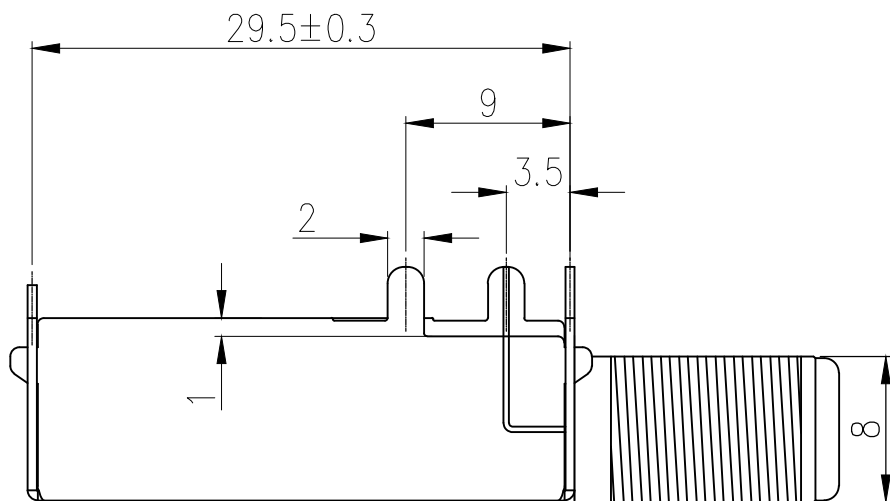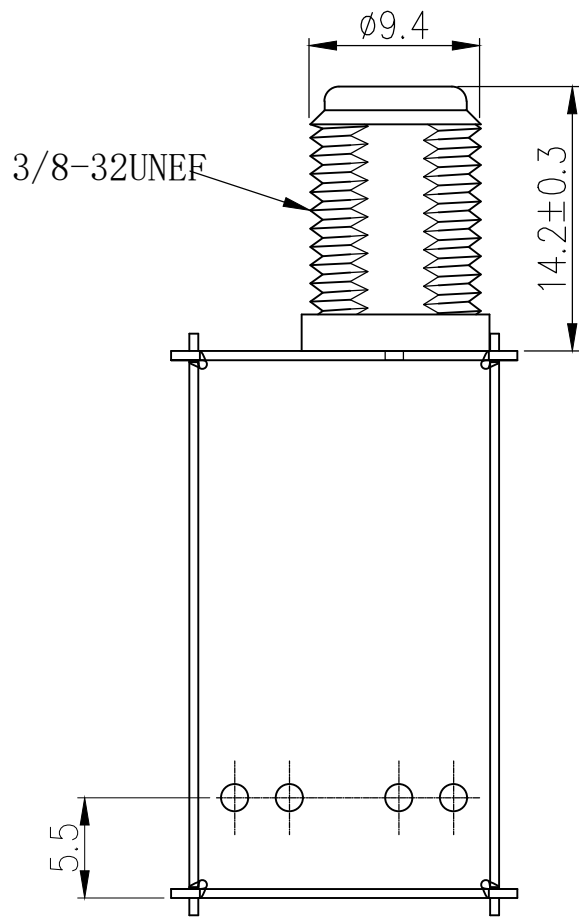

SPECIFICATION (技术要求)

1. Operating Temperature(环境温度): -25℃~85℃
2. Voltage Rating(额定电压): 50V AC/DC
3. Current Rating(额定电流): 0.5A
4. Contact Resistance(接触抗阻): 30mΩ
5. Insulation Resistance(绝缘抗阻): 100MΩ
6. Dielectric Withstanding Voltage(耐电压): 500V AC Min
7. Insertion/Withdrawal Force(插拔力): 3-50N
8. Life Time(mating cycles)寿命: >1000 Cycles
10. SIGNAL LOSS<1dB IN BOTH VHF, UHF BAND.
11. NOMINAL IMPEDANCE : 75 OHMS.
12. OPERATING FREQUENCY : 0-2 GHZ.

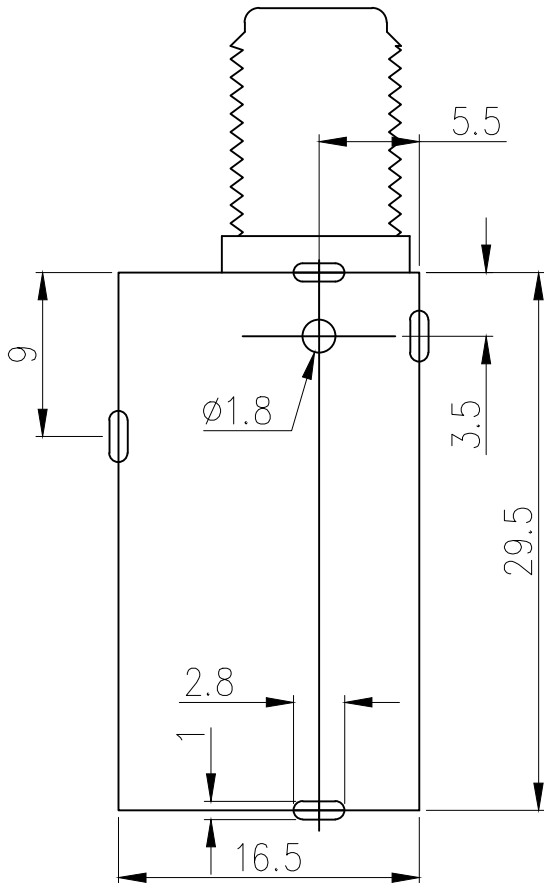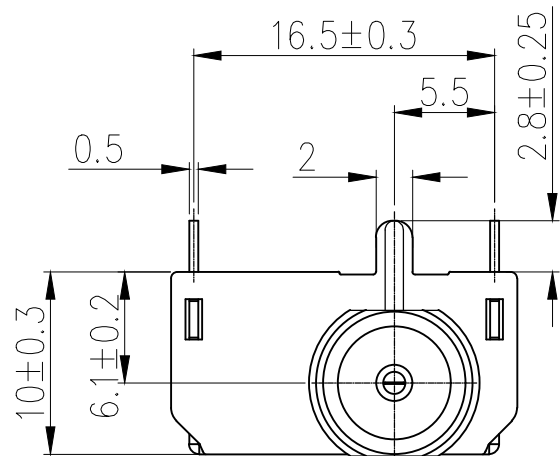

Recommend PCB Layout
Tolerance: ±0.05mm

3	F头	锌合金	镀镍	
2	支架	SPCC	镀铜锡	
1	绝缘体	PPS	棕色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	屏蔽罩	
			料 号 PART NO	HC-PBZ-R03704	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1		
0-10: ±0.3 26-50: ±0.5		单 位 UNIT	MM	制 图 DRAW	AhYe
11-25: ±0.4 ANGULAR: ±2°		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
		版 本 REV	A	批 准 APPROVE	赵亮亮

