



*The Leading Edge in EMI/RFI Board, Enclosure,  
Cable Shielding and Thermal Solutions.*



## FERRITES

**BISECTED & SOLID BEAD STYLES  
FOR ROUND AND FLAT CABLES & WIRES**

- World's Largest In-Stock Selection
- Frequency-Specific Formulations
- Flexible Mounting Options

## 5 STEP COMMITMENT TO OUR VALUED CUSTOMERS



### 1. OUR VISION *(An aspiration worthy to strive for)*

We are committed to being the most reliable and innovative supplier in the EMI/RFI industry, and as our name implies, the leader. In order to achieve this we will consistently strive to provide you with unparalleled service, innovation, and solutions.

### 2. OUR MISSION *(Our daily commitment to you)*

We are committed to consistently provide you with innovation and flexibility of design. Our engineering expertise and conscientious, outstanding customer service that will provide you with the right product, delivered on time. We are dedicated to making you look good to your customers. We want your repeat business.

### 3. OUR PRODUCTS *(Precision engineered to work in your application)*

We are committed to product excellence. We offer our patented Circuit Board Shields (CBS), an extensive range of copper beryllium (CuBE), a Conductive Elastomer product line, TechVENT Honeycomb Panels, TechMESH knitted mesh, and microwave absorbers. Using this diverse product line, Leader Tech is positioned to provide you with a 'total shielding solution' for all of your EMI/RFI shielding requirements.

### 4. OUR FACILITIES *(Continually expanding to meet your needs)*

Leader Tech is committed to expansion wherever and whenever necessary. We are constantly expanding our hardware and software capabilities while investing in new equipment to manufacture and deliver the most precise and cost efficient shielding in the industry. Through the continuous support and backing of our parent company HEICO, the possibilities for new space and equipment are an ever-present reality.

### 5. OUR SERVICES *(Consistent reliability each time you order)*

We are committed to excellent service. Our staff undergoes a rigorous daily product, sales, and service training in order to serve you better. We want your calls answered by a person, not a machine, someone trained to qualify your needs and get answers to you when you need them. At Leader Tech we believe that the right people and the right equipment go hand in hand.

# TABLE OF CONTENTS

## FERRITES

|                                                    |    |
|----------------------------------------------------|----|
| Product Profile                                    | 4  |
| Solid Beads, Toroids, Pre-Molded Sleeve            | 5  |
| Jelly Bean Snap, Cable Snap, Internal Locking Snap | 6  |
| Cable Sleeve Snap, Sleeve Snap for Cable Bundles   | 7  |
| Multi-turn Sleeve Snap, Sleeve Snap                | 8  |
| Cable Snap                                         | 11 |
| Low Profile Flat Cable Clamp                       | 12 |
| Flat Cable Clamp                                   | 13 |
| Rectangular Solids                                 | 15 |
| Low Profile Solids, Special Purpose Shielding Bar  | 16 |
| Saddle Beads                                       | 17 |
| LeaderTech Shielding Products                      | 19 |

---

### EMI PROBLEM?

Our sales engineers are waiting for your call: **866-TECH-EMI (866-832-4364)**

Visit our web site today to browse our complete product line, download literature and find your local sales engineer or sales representative! **[www.leadertechinc.com](http://www.leadertechinc.com)**

## Product Profile

Ferrite shielding materials are widely accepted as providing the simplest, most convenient, and most cost-effective solution for radio frequency interference problems in cables, and connectors. Furthermore, they accomplish both RF attenuation and suppression of unwanted high frequency oscillations with no loss in dc or low frequency signal strength.

The basic composition of ferrite materials is a combination of ferrous oxide, and one or more other powdered metals - most often manganese, zinc, cobalt, or nickel. An extensive selection of shapes and sizes are already available, and custom geometries may be manufactured for special situations.

There are infinite varieties of formulas and performance levels possible. Each specific ferrite formulation has its own electrical, magnetic, and mechanical performance characteristic (available upon request). The most common ferrite material property is permeability ( $\mu_i$ ). This property expresses the ratio of the magnitude of magnetic induction to magnetizing force. The materials are normally categorized according to initial permeability ( $\mu_i$ ).

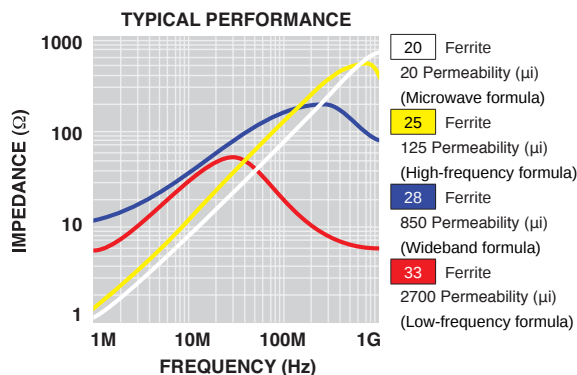


fig.1 Typical attenuation profiles

## Advantages

Compared to other alternatives, ferrites' high resistivity per cubic volume stands out as the most important advantage. Prior to the development of bisected ferrites, suppression engineering was restricted to the costly addition of filters, cable shielding, and less versatile solid core (not bisected) ferrites. While these methods offer a degree of suppression, they are often awkward to install and, in many cases, are not completely effective. Bisected ferrites have a concentrated, homogeneous magnetic structure with high permeability. They are consistently stable versus time and temperature, and provide RF suppression without high eddy current losses.

## Choose a ferrite material

FerriShield ferrites are offered in (4) unique formulations. The chart below offers an overview of typical material properties.

| Ferrite                             | Performance               |
|-------------------------------------|---------------------------|
| 28 Material- Most Popular Wideband  | 10MHz-1GHz (250MHz peak)  |
| 33 Material- Low-Frequency Ferrite  | 1MHz-60MHz (30MHz peak)   |
| 25 Material- High-Frequency Ferrite | 1MHz-1.2GHz (700MHz peak) |
| 20 Material- Bluetooth/Microwave    | 2.45GHz peak              |



## Helpful Tips and Insider Hints

- Ferrite performance typically increases as ferrite volume increases. The larger the ferrite mass, the better the RF attenuation.
- Smaller cables can be looped through larger ferrites to increase performance. Impedance increase by the square of the number of loops. For example, by looping a cable through a ferrite 2 times ( $2^2$ ), impedance increases by a factor of 4.



## Solid Beads

For applications where it is possible to assemble the ferrite suppressor before the cable ends are terminated.




| Part No.  | Material | A     |      | B     |      | C     |      | Impedance in OHMS | Maximum recommended cable size |      |      |
|-----------|----------|-------|------|-------|------|-------|------|-------------------|--------------------------------|------|------|
| 20B0562-2 | 20       | 1.125 | 28,6 | .562  | 14,3 | .250  | 6,4  |                   | .250                           | 6,4  | dia. |
| 20B0736-0 | 20       | 1.125 | 28,6 | .736  | 18,7 | .430  | 10,9 |                   | .410                           | 10,4 | dia. |
| 28B0137-3 | 28       | .500  | 12,7 | .138  | 3,5  | .051  | 1,3  | 153 @ 100MHz      | .051                           | 1,3  | dia. |
| 28B0138-7 | 28       | .550  | 14,0 | .138  | 3,5  | .034  | 0,9  | 234 @ 100MHz      | .034                           | 0,9  | dia. |
| 28B0200-4 | 28       | .900  | 22,9 | .200  | 5,1  | .062  | 1,6  | 318 @ 100MHz      | .062                           | 1,6  | dia. |
| 28B0250-1 | 28       | .625  | 15,9 | .250  | 6,4  | .125  | 3,2  | 133 @ 100MHz      | .125                           | 3,2  | dia. |
| 28B0300-0 | 28       | .200  | 5,1  | .300  | 7,6  | .069  | 1,8  | 93 @ 100MHz       | .069                           | 1,8  | dia. |
| 28B0350-0 | 28       | .625  | 15,9 | .343  | 8,7  | .170  | 4,3  | 102 @ 100MHz      | .170                           | 4,3  | dia. |
| 28B0375-3 | 28       | .750  | 19,1 | .375  | 9,5  | .192  | 4,9  | 140 @ 100MHz      | .200                           | 5,1  | dia. |
| 28B0562-2 | 28       | 1.125 | 28,6 | .562  | 14,3 | .250  | 6,4  | 257 @ 100MHz      | .250                           | 6,3  | dia. |
| 28B0563-0 | 28       | .600  | 15,2 | .562  | 14,3 | .286  | 7,3  | 124 @ 100MHz      | .285                           | 7,3  | dia. |
| 28B0625-0 | 28       | .562  | 14,3 | .625  | 15,9 | .310  | 7,9  | 120 @ 100MHz      | .310                           | 7,9  | dia. |
| 28B0625-1 | 28       | 1.125 | 28,6 | .625  | 15,9 | .310  | 7,9  | 225 @ 100MHz      | .310                           | 7,9  | dia. |
| 28B0672-0 | 28       | .672  | 17,1 | 1.000 | 25,4 | .345  | 8,8  | 182 @ 100MHz      | .345                           | 8,8  | dia. |
| 28B0686-2 | 28       | 1.125 | 28,6 | .686  | 17,4 | .375  | 9,5  | 196 @ 100MHz      | .375                           | 9,5  | dia. |
| 28B0735-0 | 28       | 1.125 | 28,6 | .735  | 18,7 | .400  | 10,2 | 188 @ 100MHz      | .400                           | 10,2 | dia. |
| 28B0736-0 | 28       | 1.125 | 28,6 | .736  | 18,7 | .430  | 10,9 | 176 @ 100MHz      | .410                           | 10,4 | dia. |
| 28B1020-1 | 28       | 1.125 | 28,6 | 1.020 | 25,9 | .505  | 12,8 | 225 @ 100MHz      | .505                           | 12,8 | dia. |
| 28B1102-1 | 28       | 1.000 | 25,4 | 1.102 | 28,0 | .620  | 15,7 | 147 @ 100MHz      | .630                           | 16,0 | dia. |
| 28B1250-2 | 28       | 1.000 | 25,4 | 1.250 | 31,8 | .750  | 19,1 | 151 @ 100MHz      | .750                           | 19,0 | dia. |
| 28B1387-1 | 28       | 1.000 | 25,4 | 1.387 | 35,2 | .882  | 22,4 | 142 @ 100MHz      | .880                           | 22,4 | dia. |
| 28B2000-3 | 28       | 2.000 | 50,8 | 2.000 | 50,8 | 1.000 | 25,4 | 381 @ 100MHz      | 1.000                          | 25,4 | dia. |



## Toroids

Cables can many times be assembled through the larger center opening even with connectors and plugs installed beforehand. Multiple cable turns through the center yield greater suppression and the flexibility to fine-tune a circuit.



| Part No.  | Material | A    |      | B     |       | C     |      | Impedance in OHMS    | Maximum recommended cable size |      |      |
|-----------|----------|------|------|-------|-------|-------|------|----------------------|--------------------------------|------|------|
| 28B0870-0 | 28       | .250 | 6,4  | .870  | 22,1  | .540  | 13,7 | one pass 25 @ 100MHz | .540                           | 13,7 | dia. |
| 28B0999-0 | 28       | .500 | 12,7 | 1.000 | 25,4  | .610  | 15,5 | one pass 83 @ 100MHz | .610                           | 15,5 | dia. |
| 28B1225-0 | 28       | .612 | 15,5 | 1.225 | 31,1  | .750  | 19,1 | one pass 97 @ 100MHz | .750                           | 19,1 | dia. |
| 28B1417-2 | 28       | .500 | 12,7 | 1.417 | 36,0  | .905  | 23,0 | one pass 89 @ 100MHz | .905                           | 23,0 | dia. |
| 28B2400-0 | 28       | .500 | 12,7 | 2.400 | 61,0  | 1.400 | 35,6 | one pass 88 @ 100MHz | 1.400                          | 35,6 | dia. |
| 28B2275   | 28       | .500 | 12,7 | 2.275 | 57,8  | 1.335 | 33,9 | per application      | 1.335                          | 33,9 | dia. |
| 28B4100   | 28       | .500 | 12,7 | 4.100 | 104,1 | 2.650 | 67,3 | per application      | 2.650                          | 67,3 | dia. |

## Pre-Molded Sleeve

### WITH INTERNAL FRICTION GRIP

Exterior PVC sheath pre-molded over ferrite suppressor. Assembles to cable prior to termination by threading in one end and out the other. Five sizes accommodate cable diameters from .200" to .430" (5,1 to 10,9mm). The preferred alternative to cable over-molding, shrink tubing, taping, tie wraps, and other costly secondary installation operations. A drop of water in the I.D. during assembly will facilitate sliding into position.



Patent No. 5,200,730

| Part No.  | Material | A    |      | B    |      | C    |      | D    |      | E    |     | F     |      | Impedance in OHMS | Maximum recommended cable size |      |      |
|-----------|----------|------|------|------|------|------|------|------|------|------|-----|-------|------|-------------------|--------------------------------|------|------|
| PM28B3375 | 28       | .192 | 4,9  | .290 | 7,4  | .465 | 11,8 | 2.01 | 51,1 | .250 | 6,4 | .960  | 24,4 | 140 @ 100MHz      | .192                           | 4,9  | dia. |
| PM28B1625 | 28       | .310 | 7,9  | .400 | 10,2 | .715 | 18,2 | 2.38 | 60,5 | .250 | 6,4 | 1.335 | 33,9 | 225 @ 100MHz      | .310                           | 7,9  | dia. |
| PM28B0686 | 28       | .375 | 9,5  | .465 | 11,8 | .776 | 19,7 | 2.38 | 60,5 | .250 | 6,4 | 1.335 | 33,9 | 196 @ 100MHz      | .375                           | 9,5  | dia. |
| PM28B0736 | 28       | .430 | 10,9 | .520 | 13,2 | .776 | 19,7 | 2.38 | 60,5 | .250 | 6,4 | 1.335 | 33,9 | 176 @ 100MHz      | .410                           | 10,4 | dia. |

28

10MHz-1GHz (250MHz peak)

33

1MHz-60MHz (30MHz peak)

25

1MHz-1.2GHz (700MHz peak)

20

2.45GHz peak




## Jelly Bean Snap

### MINIATURE SIZE WITH INTERNAL LOCKING SYSTEM.

Cannot be reopened after snapping closed into position. Ensures that suppressor cannot be removed. Grip-lock tabs at entry/exit ports prevent longitudinal slippage on a range of cable diameters from .060" to .120" (1,5 to 3,0mm).

Excellent for tight spaces and low profile applications. A cost-effective alternative to "molded-in" suppressors, shrink tubing, tie wraps, taping, and other secondary installation operations.




Patent Nos. 5,003,278 , 5,162,772 and 5,764,125

| Part No.   | Material | A    |      | B    |      | C    |      | D    |     | E    |     | Color | Impedance in OHMS | Maximum recommended cable size |     |    |      |     |      |
|------------|----------|------|------|------|------|------|------|------|-----|------|-----|-------|-------------------|--------------------------------|-----|----|------|-----|------|
| JB28B0010  | 28       | .670 | 17,0 | .820 | 20,8 | .670 | 17,0 | .290 | 7,4 | .055 | 1,4 | Grey  | 160 @ 100MHz      | .060                           | 1,5 | to | .120 | 3,1 | dia. |
| JB28B0010K | 28       | .670 | 17,0 | .820 | 20,8 | .670 | 17,0 | .290 | 7,4 | .055 | 1,4 | Black | 160 @ 100MHz      | .060                           | 1,5 | to | .120 | 3,1 | dia. |



## Cable Clamp

Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25,4 mm) diameter. Holes are provided for screw mounting.




| Part No.   | Material | A     |      | B     |      | C     |      | D     |      | E     |      | F    |     | Color | Impedance in OHMS | Maximum recommended cable size |      |      |
|------------|----------|-------|------|-------|------|-------|------|-------|------|-------|------|------|-----|-------|-------------------|--------------------------------|------|------|
| TC25B0642  | 25       | .785  | 19,9 | .630  | 16,0 | .785  | 19,9 | .320  | 8,1  | 1.335 | 33,9 | .195 | 5,0 | Grey  | 290 @ 700MHz      | .320                           | 8,1  | dia. |
| TC25B0642K | 25       | .785  | 19,9 | .630  | 16,0 | .785  | 19,9 | .320  | 8,1  | 1.335 | 33,9 | .195 | 5,0 | Black | 290 @ 700MHz      | .320                           | 8,1  | dia. |
| TC25B2000  | 25       | 2.125 | 54,0 | 1.500 | 38,1 | 2.125 | 54,0 | 1.000 | 25,4 | 2.860 | 72,6 | .281 | 7,1 | Grey  | 890 @ 700MHz      | 1.000                          | 25,4 | dia. |
| TC25B2000K | 25       | 2.125 | 54,0 | 1.500 | 38,1 | 2.125 | 54,0 | 1.000 | 25,4 | 2.860 | 72,6 | .281 | 7,1 | Black | 890 @ 700MHz      | 1.000                          | 25,4 | dia. |
| TC28B0550  | 28       | .685  | 17,4 | 1.105 | 28,1 | .685  | 17,4 | .214  | 5,4  | 1.102 | 28,0 | .195 | 5,0 | Grey  | 281 @ 100MHz      | .214                           | 5,4  | dia. |
| TC28B0550K | 28       | .685  | 17,4 | 1.105 | 28,1 | .685  | 17,4 | .214  | 5,4  | 1.102 | 28,0 | .195 | 5,0 | Black | 281 @ 100MHz      | .214                           | 5,4  | dia. |
| TC28B0642  | 28       | .785  | 19,9 | .630  | 16,0 | .785  | 19,9 | .320  | 8,1  | 1.335 | 33,9 | .195 | 5,0 | Grey  | 100 @ 100MHz      | .320                           | 8,1  | dia. |
| TC28B0642K | 28       | .785  | 19,9 | .630  | 16,0 | .785  | 19,9 | .320  | 8,1  | 1.335 | 33,9 | .195 | 5,0 | Black | 100 @ 100MHz      | .320                           | 8,1  | dia. |
| TC28B0937  | 28       | 1.127 | 28,6 | .551  | 14,0 | 1.127 | 28,6 | .449  | 11,4 | 1.677 | 42,6 | .195 | 5,0 | Grey  | 117 @ 100MHz      | .449                           | 11,4 | dia. |
| TC28B0937K | 28       | 1.127 | 28,6 | .551  | 14,0 | 1.127 | 28,6 | .449  | 11,4 | 1.677 | 42,6 | .195 | 5,0 | Black | 117 @ 100MHz      | .449                           | 11,4 | dia. |
| TC28B0984  | 28       | 1.127 | 28,6 | .500  | 12,7 | 1.127 | 28,6 | .591  | 15,0 | 1.677 | 42,6 | .195 | 5,0 | Grey  | 62 @ 100MHz       | .591                           | 15,0 | dia. |
| TC28B0984K | 28       | 1.127 | 28,6 | .500  | 12,7 | 1.127 | 28,6 | .591  | 15,0 | 1.677 | 42,6 | .195 | 5,0 | Black | 62 @ 100MHz       | .591                           | 15,0 | dia. |
| TC28B1501  | 28       | 1.628 | 41,4 | 1.000 | 25,4 | 1.628 | 41,4 | .750  | 19,1 | 2.150 | 54,6 | .195 | 5,0 | Grey  | 177 @ 100MHz      | .750                           | 19,1 | dia. |
| TC28B1501K | 28       | 1.628 | 41,4 | 1.000 | 25,4 | 1.628 | 41,4 | .750  | 19,1 | 2.150 | 54,6 | .195 | 5,0 | Black | 177 @ 100MHz      | .750                           | 19,1 | dia. |
| TC28B1500  | 28       | 1.628 | 41,4 | 1.000 | 25,4 | 1.628 | 41,4 | 1.000 | 25,4 | 2.150 | 54,6 | .195 | 5,0 | Grey  | 133 @ 100MHz      | 1.000                          | 25,4 | dia. |
| TC28B1500K | 28       | 1.628 | 41,4 | 1.000 | 25,4 | 1.628 | 41,4 | 1.000 | 25,4 | 2.150 | 54,6 | .195 | 5,0 | Black | 133 @ 100MHz      | 1.000                          | 25,4 | dia. |
| TC28B2000  | 28       | 2.125 | 54,0 | 1.500 | 38,1 | 2.125 | 54,0 | 1.000 | 25,4 | 2.860 | 72,6 | .281 | 7,1 | Grey  | 380 @ 100MHz      | 1.000                          | 25,4 | dia. |
| TC28B2000K | 28       | 2.125 | 54,0 | 1.500 | 38,1 | 2.125 | 54,0 | 1.000 | 25,4 | 2.860 | 72,6 | .281 | 7,1 | Black | 380 @ 100MHz      | 1.000                          | 25,4 | dia. |



## Internal Locking Snap

### WITH SECURE INTERNAL LOCKING SYSTEM.

Cannot be reopened after snapping closed into position. Ensures that suppressor cannot be removed. Grip-lock tabs at entry/exit ports prevent longitudinal slippage on a range of cable diameters from .275" to .300" (7,0 to 7,6mm). A cost-effective alternative to over-molding.




Patent Nos. 5,003,278 , 5,162,772 and 5,764,125

| Part No.   | Material | A    | B    | C    | D    | Color | Impedance in OHMS | Maximum recommended cable size |              |      |     |      |
|------------|----------|------|------|------|------|-------|-------------------|--------------------------------|--------------|------|-----|------|
| IL25B0642G | 25       | .780 | 19,8 | .780 | 19,8 | .316  | 8,0               | Grey                           | 290 @ 700MHz | .320 | 8,1 | dia. |
| IL25B0642K | 25       | .780 | 19,8 | .780 | 19,8 | .316  | 8,0               | Black                          | 290 @ 700MHz | .320 | 8,1 | dia. |
| IL28B0642G | 28       | .780 | 19,8 | .780 | 19,8 | .316  | 8,0               | Grey                           | 100 @ 100MHz | .320 | 8,1 | dia. |
| IL28B0642B | 28       | .780 | 19,8 | .780 | 19,8 | .316  | 8,0               | Beige                          | 100 @ 100MHz | .320 | 8,1 | dia. |
| IL28B0642K | 28       | .780 | 19,8 | .780 | 19,8 | .316  | 8,0               | Black                          | 100 @ 100MHz | .320 | 8,1 | dia. |

## Cable Sleeve Snap

### WITH VARIABLE DIAMETER END PORTS.

Specifically sized to fit the range of common USB I/O cable diameters; variable diameter end ports allow for different types of cable insulation covers measuring .125" to .179" (3,2 - 4,5mm).

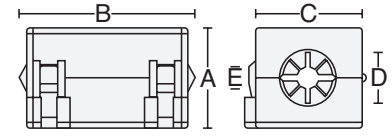


Patent Nos. 5,003,278 and 5,764,125

For use with USB I/O USB 2.0 Electrical Test Specification, sections 7.0 and 8.0

| Part No.    | Material | A    |      | B     |      | C    |      | D    |     | E    |     | F    |      | Color | Impedance in OHMS | Maximum recommended cable size |     |    |      |     |      |
|-------------|----------|------|------|-------|------|------|------|------|-----|------|-----|------|------|-------|-------------------|--------------------------------|-----|----|------|-----|------|
| USB28B2034  | 28       | .585 | 14,9 | 1.250 | 31,8 | .585 | 14,9 | .250 | 6,4 | .120 | 3,0 | .680 | 17,3 | Grey  | 220 @ 100MHz      | .125                           | 3,2 | to | .170 | 4,3 | dia. |
| USB28B2034K | 28       | .585 | 14,9 | 1.250 | 31,8 | .585 | 14,9 | .250 | 6,4 | .120 | 3,0 | .680 | 17,3 | Black | 220 @ 100MHz      | .125                           | 3,2 | to | .170 | 4,3 | dia. |

## Sleeve Snap for Cable Bundles


Box-shaped ferrite assembly for cable bundle diameters up to .730" (18,5mm) diameter. Allows single location for RFI suppression for multiple cables. Each circuit reacts separately with the suppression material without saturation. Alternatively, multiple turns of a single cable greatly increases impedance depending on frequency.

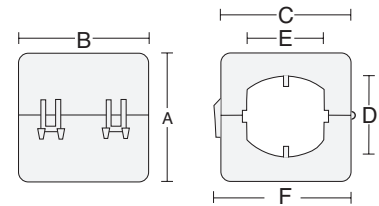

| Part No.   | Material | A     | B    | C     | D    | E     | F    | Color | Impedance in OHMS | Maximum recommended cable size |      |       |      |       |              |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|-------|-------------------|--------------------------------|------|-------|------|-------|--------------|------|------|------|
| SS28B2035  | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Grey  | 129 @ 100MHz | .730 | 18,5 | dia. |
| SS28B2035K | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Black | 129 @ 100MHz | .730 | 18,5 | dia. |
| SS28B2043  | 28       | 1.700 | 43,2 | 1.780 | 45,2 | 1.800 | 45,7 | .790  | 20,1              | .720                           | 18,3 | 1.830 | 46,5 | Grey  | 260 @ 100MHz | .730 | 18,5 | dia. |
| SS28B2043K | 28       | 1.700 | 43,2 | 1.780 | 45,2 | 1.800 | 45,7 | .790  | 20,1              | .720                           | 18,3 | 1.830 | 46,5 | Black | 260 @ 100MHz | .730 | 18,5 | dia. |
| SS33B2035  | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Grey  | 023 @ 30MHz  | .730 | 18,5 | dia. |
| SS33B2035K | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Black | 023 @ 30MHz  | .730 | 18,5 | dia. |

## Sleeve Snap for Cable Bundles With Adhesive Mount

Box-shaped ferrite assembly for cable bundle diameters up to .730" (18,5mm) diameter. Allows single location for RFI suppression for multiple cables. Each circuit reacts separately with the suppression material without saturation. Alternatively, multiple turns of a single cable greatly increases impedance depending on frequency.

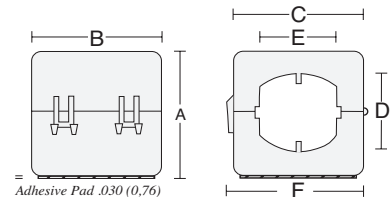

| Part No.   | Material | A     | B    | C     | D    | E     | F    | Color | Impedance in OHMS | Maximum recommended cable size |      |       |      |       |              |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|-------|-------------------|--------------------------------|------|-------|------|-------|--------------|------|------|------|
| AS28B2035  | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Grey  | 129 @ 100MHz | .730 | 18,5 | dia. |
| AS28B2035K | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Black | 129 @ 100MHz | .730 | 18,5 | dia. |
| AS28B2043  | 28       | 1.730 | 43,9 | 1.780 | 45,2 | 1.800 | 45,7 | .790  | 20,1              | .720                           | 18,3 | 1.830 | 46,5 | Grey  | 260 @ 100MHz | .730 | 18,5 | dia. |
| AS28B2043K | 28       | 1.730 | 43,9 | 1.780 | 45,2 | 1.800 | 45,7 | .790  | 20,1              | .720                           | 18,3 | 1.830 | 46,5 | Black | 260 @ 100MHz | .730 | 18,5 | dia. |
| AS33B2035  | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Grey  | 023 @ 30MHz  | .730 | 18,5 | dia. |
| AS33B2035K | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .790  | 20,1              | .720                           | 18,3 | 1.230 | 31,2 | Black | 023 @ 30MHz  | .730 | 18,5 | dia. |




## Multi-turn Sleeve Snap

### WITH SERPENTINE CABLE THREADING CAPABILITY.

By increasing the number of times the circuit passes through the ferrite core, the effective magnetic path is lengthened, yielding a significant increase in impedance. The gain is equal to  $N^2$ , the square of the number of turns. Depending on the circuit cable load and frequencies involved, much of the increase can be realized.

Cables may be "looped back through", or "looped over the top"

In an alternate configuration, separate cable circuits can be accommodated without saturation.




| Part No.     | Material Description | A      | B          | C          | D          | E        | Color      | Impedance in OHMS                                 | Maximum recommended cable size |
|--------------|----------------------|--------|------------|------------|------------|----------|------------|---------------------------------------------------|--------------------------------|
| SS28B2035-2  | 28                   | 2-hole | 1.155 29,3 | 1.250 31,8 | 1.125 28,6 | .335 8,5 | 1.230 31,2 | Grey 1N=270 @ 100MHz 3N=3 <sup>2</sup> =9NΩ ref.  | 2 holes ea. @ .203 5,2 dia.    |
| SS28B2035-2K | 28                   | 2-hole | 1.155 29,3 | 1.250 31,8 | 1.125 28,6 | .335 8,5 | 1.230 31,2 | Black 1N=270 @ 100MHz 3N=3 <sup>2</sup> =9NΩ ref. | 2 holes ea. @ .203 5,2 dia.    |



## Sleeve Snap

Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .500" (12,7 mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position.

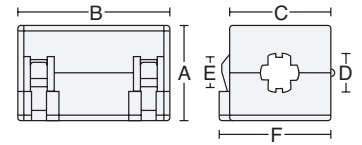

Patent No. 5,764,125

| Part No.   | Material | A     |      | B     |      | C     |      | D    |      | E    |      | F     |      | Color | Impedance in OHMS | Maximum recommended cable size |           |
|------------|----------|-------|------|-------|------|-------|------|------|------|------|------|-------|------|-------|-------------------|--------------------------------|-----------|
| SS20B2030  | 20       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Grey  | N/A               | .235                           | 6,0 dia.  |
| SS20B2030K | 20       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Black | N/A               | .235                           | 6,0 dia.  |
| SS20B2033  | 20       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Grey  | N/A               | .300                           | 7,6 dia.  |
| SS20B2033K | 20       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Black | N/A               | .300                           | 7,6 dia.  |
| SS20B2041  | 20       | .965  | 24,5 | 1.285 | 32,6 | .930  | 23,6 | .450 | 11,4 | .380 | 9,7  | 1.035 | 26,3 | Grey  | N/A               | .400                           | 10,2 dia. |
| SS20B2041K | 20       | .965  | 24,5 | 1.285 | 32,6 | .930  | 23,6 | .450 | 11,4 | .380 | 9,7  | 1.035 | 26,3 | Black | N/A               | .400                           | 10,2 dia. |
| SS25B2030  | 25       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Grey  | 390 @ 700MHz      | .235                           | 6,0 dia.  |
| SS25B2030K | 25       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Black | 390 @ 700MHz      | .235                           | 6,0 dia.  |
| SS25B2033  | 25       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Grey  | 390 @ 700MHz      | .300                           | 7,6 dia.  |
| SS25B2033K | 25       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Black | 390 @ 700MHz      | .300                           | 7,6 dia.  |
| SS28B2027  | 28       | .420  | 10,7 | .468  | 11,9 | .468  | 11,9 | .106 | 2,7  | .072 | 1,8  | .468  | 11,9 | Grey  | 105 @ 100MHz      | .085                           | 2,2 dia.  |
| SS28B2027K | 28       | .420  | 10,7 | .468  | 11,9 | .468  | 11,9 | .106 | 2,7  | .072 | 1,8  | .468  | 11,9 | Black | 105 @ 100MHz      | .085                           | 2,2 dia.  |
| SS28B2030  | 28       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Grey  | 200 @ 100MHz      | .235                           | 6,0 dia.  |
| SS28B2030K | 28       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Black | 200 @ 100MHz      | .235                           | 6,0 dia.  |
| SS28B2031  | 28       | .700  | 17,8 | 1.255 | 31,9 | .675  | 17,1 | .230 | 5,8  | .187 | 4,7  | .768  | 19,5 | Grey  | 200 @ 100MHz      | .200                           | 5,1 dia.  |
| SS28B2031K | 28       | .700  | 17,8 | 1.255 | 31,9 | .675  | 17,1 | .230 | 5,8  | .187 | 4,7  | .768  | 19,5 | Black | 200 @ 100MHz      | .200                           | 5,1 dia.  |
| SS28B2033  | 28       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Grey  | 200 @ 100MHz      | .300                           | 7,6 dia.  |
| SS28B2033K | 28       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Black | 200 @ 100MHz      | .300                           | 7,6 dia.  |
| SS28B2036  | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .415 | 10,5 | .350 | 8,8  | 1.230 | 31,2 | Grey  | 230 @ 100MHz      | .380                           | 9,7 dia.  |
| SS28B2036K | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .415 | 10,5 | .350 | 8,8  | 1.230 | 31,2 | Black | 230 @ 100MHz      | .380                           | 9,7 dia.  |
| SS28B2040  | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .550 | 14,0 | .480 | 12,2 | 1.230 | 31,2 | Grey  | 230 @ 100MHz      | .500                           | 12,7 dia. |
| SS28B2040K | 28       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .550 | 14,0 | .480 | 12,2 | 1.230 | 31,2 | Black | 230 @ 100MHz      | .500                           | 12,7 dia. |
| SS28B2041  | 28       | .965  | 24,5 | 1.285 | 32,6 | .930  | 23,6 | .450 | 11,4 | .380 | 9,7  | 1.035 | 26,3 | Grey  | 238 @ 100MHz      | .400                           | 10,2 dia. |
| SS28B2041K | 28       | .965  | 24,5 | 1.285 | 32,6 | .930  | 23,6 | .450 | 11,4 | .380 | 9,7  | 1.035 | 26,3 | Black | 238 @ 100MHz      | .400                           | 10,2 dia. |
| SS33B2030  | 33       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Grey  | 23 @ 30MHz        | .235                           | 6,0 dia.  |
| SS33B2030K | 33       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .270 | 6,9  | .220 | 5,6  | .885  | 22,5 | Black | 23 @ 30MHz        | .235                           | 6,0 dia.  |
| SS33B2033  | 33       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Grey  | 23 @ 30MHz        | .300                           | 7,6 dia.  |
| SS33B2033K | 33       | .790  | 20,1 | 1.265 | 32,1 | .770  | 19,6 | .350 | 8,9  | .290 | 7,4  | .885  | 22,5 | Black | 23 @ 30MHz        | .300                           | 7,6 dia.  |
| SS33B2036  | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .415 | 10,5 | .350 | 8,9  | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .380                           | 9,7 dia.  |
| SS33B2036K | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .415 | 10,5 | .350 | 8,9  | 1.230 | 31,2 | Black | 27 @ 30MHz        | .380                           | 9,7 dia.  |
| SS33B2040  | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .550 | 14,0 | .480 | 12,2 | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .500                           | 12,7 dia. |
| SS33B2040K | 33       | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6 | .550 | 14,0 | .480 | 12,2 | 1.230 | 31,2 | Black | 27 @ 30MHz        | .500                           | 12,7 dia. |




## Multi-turn Sleeve Snap

### WITH SERPENTINE CABLE THREADING CAPABILITY.

By increasing the number of times the circuit passes through the ferrite core, the effective magnetic path is lengthened, yielding a significant increase in impedance. The gain is equal to  $N^2$ , the square of the number of turns, and depending on the circuit cable load and frequencies involved, much of the increase can be realized.

Cables may be "looped back through", or "looped over the top"

In an alternate configuration, separate cable circuits can be accommodated without saturation.




| Part No.     | Material | Description | A     | B    | C     | D    | E     | Color | Impedance in OHMS | Maximum recommended cable size |       |      |       |                 |                                         |                    |     |      |
|--------------|----------|-------------|-------|------|-------|------|-------|-------|-------------------|--------------------------------|-------|------|-------|-----------------|-----------------------------------------|--------------------|-----|------|
| SS28B2035-3  | 28       | 3-hole      | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6  | .203              | 5,2                            | 1.230 | 31,2 | Grey  | 1N=340 @ 100MHz | depending on circuit load and frequency | 3 holes ea. @ .203 | 5,2 | dia. |
| SS28B2035-3K | 28       | 3-hole      | 1.155 | 29,3 | 1.250 | 31,8 | 1.125 | 28,6  | .203              | 5,2                            | 1.230 | 31,2 | Black | 1N=340 @ 100MHz | depending on circuit load and frequency | 3 holes ea. @ .203 | 5,2 | dia. |



## Sleeve Snap With Adhesive Mount

Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .500" (12,7 mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position.



Patent No. 5,764,125


| Part No.   | Material | A     | B    | C     | D    | E     | F    | Color | Impedance in OHMS | Maximum recommended cable size |      |       |      |       |              |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|-------|-------------------|--------------------------------|------|-------|------|-------|--------------|------|------|------|
| AS20B2030  | 20       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Grey  | N/A          | .235 | 6,0  | dia. |
| AS20B2030K | 20       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Black | N/A          | .235 | 6,0  | dia. |
| AS20B2033  | 20       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Grey  | N/A          | .300 | 7,6  | dia. |
| AS20B2033K | 20       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Black | N/A          | .300 | 7,6  | dia. |
| AS20B2041  | 20       | .995  | 25,3 | 1.285 | 32,6 | .930  | 23,6 | .450  | 11,4              | .380                           | 9,7  | 1.035 | 26,3 | Grey  | N/A          | .400 | 10,2 | dia. |
| AS20B2041K | 20       | .995  | 25,3 | 1.285 | 32,6 | .930  | 23,6 | .450  | 11,4              | .380                           | 9,7  | 1.035 | 26,3 | Black | N/A          | .400 | 10,2 | dia. |
| AS25B2030  | 25       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Grey  | 390 @ 700MHz | .235 | 6,0  | dia. |
| AS25B2030K | 25       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Black | 390 @ 700MHz | .235 | 6,0  | dia. |
| AS25B2033  | 25       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Grey  | 390 @ 700MHz | .300 | 7,6  | dia. |
| AS25B2033K | 25       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Black | 390 @ 700MHz | .300 | 7,6  | dia. |
| AS28B2027  | 28       | .450  | 11,4 | .468  | 11,9 | .468  | 11,9 | .106  | 2,7               | .072                           | 1,8  | .468  | 11,9 | Grey  | 105 @ 100MHz | .085 | 2,2  | dia. |
| AS28B2027K | 28       | .450  | 11,4 | .468  | 11,9 | .468  | 11,9 | .106  | 2,7               | .072                           | 1,8  | .468  | 11,9 | Black | 105 @ 100MHz | .085 | 2,2  | dia. |
| AS28B2030  | 28       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Grey  | 200 @ 100MHz | .235 | 6,0  | dia. |
| AS28B2030K | 28       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Black | 200 @ 100MHz | .235 | 6,0  | dia. |
| AS28B2031  | 28       | .730  | 18,5 | 1.255 | 31,9 | .675  | 17,1 | .230  | 5,8               | .187                           | 4,7  | .768  | 19,5 | Grey  | 200 @ 100MHz | .200 | 5,1  | dia. |
| AS28B2031K | 28       | .730  | 18,5 | 1.255 | 31,9 | .675  | 17,1 | .230  | 5,8               | .187                           | 4,7  | .768  | 19,5 | Black | 200 @ 100MHz | .200 | 5,1  | dia. |
| AS28B2033  | 28       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Grey  | 200 @ 100MHz | .300 | 7,6  | dia. |
| AS28B2033K | 28       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Black | 200 @ 100MHz | .300 | 7,6  | dia. |
| AS28B2036  | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .415  | 10,5              | .350                           | 8,8  | 1.230 | 31,2 | Grey  | 230 @ 100MHz | .380 | 9,7  | dia. |
| AS28B2036K | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .415  | 10,5              | .350                           | 8,8  | 1.230 | 31,2 | Black | 230 @ 100MHz | .380 | 9,7  | dia. |
| AS28B2040  | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .550  | 14,0              | .480                           | 12,2 | 1.230 | 31,2 | Grey  | 230 @ 100MHz | .500 | 12,7 | dia. |
| AS28B2040K | 28       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .550  | 14,0              | .480                           | 12,2 | 1.230 | 31,2 | Black | 230 @ 100MHz | .500 | 12,7 | dia. |
| AS28B2041  | 28       | .995  | 25,3 | 1.285 | 32,6 | .930  | 23,6 | .450  | 11,4              | .380                           | 9,7  | 1.035 | 26,3 | Grey  | 238 @ 100MHz | .400 | 10,2 | dia. |
| AS28B2041K | 28       | .995  | 25,3 | 1.285 | 32,6 | .930  | 23,6 | .450  | 11,4              | .380                           | 9,7  | 1.035 | 26,3 | Black | 238 @ 100MHz | .400 | 10,2 | dia. |
| AS33B2030  | 33       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Grey  | 23 @ 30MHz   | .235 | 6,0  | dia. |
| AS33B2030K | 33       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .270  | 6,9               | .220                           | 5,6  | .885  | 22,5 | Black | 23 @ 30MHz   | .235 | 6,0  | dia. |
| AS33B2033  | 33       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Grey  | 23 @ 30MHz   | .300 | 7,6  | dia. |
| AS33B2033K | 33       | .810  | 20,6 | 1.265 | 32,1 | .770  | 19,6 | .350  | 8,9               | .290                           | 7,4  | .885  | 22,5 | Black | 23 @ 30MHz   | .300 | 7,6  | dia. |
| AS33B2036  | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .415  | 10,5              | .350                           | 8,9  | 1.230 | 31,2 | Grey  | 27 @ 30MHz   | .380 | 9,7  | dia. |
| AS33B2036K | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .415  | 10,5              | .350                           | 8,9  | 1.230 | 31,2 | Black | 27 @ 30MHz   | .380 | 9,7  | dia. |
| AS33B2040  | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .550  | 14,0              | .480                           | 12,2 | 1.230 | 31,2 | Grey  | 27 @ 30MHz   | .500 | 12,7 | dia. |
| AS33B2040K | 33       | 1.185 | 30,1 | 1.250 | 31,8 | 1.125 | 28,6 | .550  | 14,0              | .480                           | 12,2 | 1.230 | 31,2 | Black | 27 @ 30MHz   | .500 | 12,7 | dia. |



## Sleeve Snap

### WITH VARIABLE DIAMETER END PORTS.

Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .500" (3,2 to 12,7 mm).



Patent No. 5,003,278 and Patent No. 5,764,125


| Part No.   | Material | A     |      | B     |      | C     |      | D    |      | E    |     | F     |      | Color | Impedance in OHMS | Maximum recommended cable size |      |    |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|------|------|------|-----|-------|------|-------|-------------------|--------------------------------|------|----|------|------|------|
| SS20B2034  | 20       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Grey  | N/A               | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| SS20B2034K | 20       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Black | N/A               | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| SS20B2037  | 20       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | N/A               | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS20B2037K | 20       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | N/A               | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS20B2042  | 20       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Grey  | N/A               | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| SS20B2042K | 20       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Black | N/A               | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| SS25B2037  | 25       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 390 @ 700MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS25B2037K | 25       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 390 @ 700MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS25B2032  | 25       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 510 @ 700MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| SS25B2032K | 25       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Black | 510 @ 700MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| SS28B2034  | 28       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Grey  | 220 @ 100MHz      | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| SS28B2034K | 28       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Black | 220 @ 100MHz      | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| SS28B2037  | 28       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 200 @ 100MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS28B2037K | 28       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 200 @ 100MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS28B2042  | 28       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Grey  | 238 @ 100MHz      | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| SS28B2042K | 28       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Black | 238 @ 100MHz      | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| SS28B2032  | 28       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 230 @ 100MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| SS28B2032K | 28       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Black | 230 @ 100MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| SS28B2044  | 28       | 1.700 | 43,2 | 1.800 | 45,7 | 1.800 | 45,7 | .790 | 20,1 | .200 | 5,1 | 1.830 | 46,5 | Grey  | 260 @ 100MHz      | .500                           | 12,7 | to | .710 | 18,0 | dia. |
| SS28B2044K | 28       | 1.700 | 43,2 | 1.800 | 45,7 | 1.800 | 45,7 | .790 | 20,1 | .200 | 5,1 | 1.830 | 46,5 | Black | 260 @ 100MHz      | .500                           | 12,7 | to | .710 | 18,0 | dia. |
| SS33B2037  | 33       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 23 @ 30MHz        | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS33B2037K | 33       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 23 @ 30MHz        | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| SS33B2032  | 33       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| SS33B2032K | 33       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .250                           | 6,3  | to | .500 | 12,7 | dia. |



## Sleeve Snap With Adhesive Mount

### WITH VARIABLE DIAMETER END PORTS.

Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .500" (3,2 to 12,7 mm).



Patent No. 5,003,278 and Patent No. 5,764,125


| Part No.   | Material | A     |      | B     |      | C     |      | D    |      | E    |     | F     |      | Color | Impedance in OHMS | Maximum recommended cable size |      |    |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|------|------|------|-----|-------|------|-------|-------------------|--------------------------------|------|----|------|------|------|
| AS20B2034  | 20       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Grey  | N/A               | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| AS20B2034K | 20       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Black | N/A               | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| AS20B2037  | 20       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | N/A               | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS20B2037K | 20       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | N/A               | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS20B2042  | 20       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Grey  | N/A               | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| AS20B2042K | 20       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Black | N/A               | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| AS25B2037  | 25       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 390 @ 700MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS25B2037K | 25       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 390 @ 700MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS25B2032  | 25       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 510 @ 700MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| AS25B2032K | 25       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Black | 510 @ 700MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| AS28B2034  | 28       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Grey  | 220 @ 100MHz      | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| AS28B2034K | 28       | .585  | 14,9 | 1.250 | 31,8 | .585  | 14,9 | .250 | 6,4  | .120 | 3,0 | .680  | 17,3 | Black | 220 @ 100MHz      | .125                           | 3,2  | to | .170 | 4,3  | dia. |
| AS28B2037  | 28       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 200 @ 100MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS28B2037K | 28       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 200 @ 100MHz      | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS28B2042  | 28       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Grey  | 238 @ 100MHz      | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| AS28B2042K | 28       | .965  | 24,5 | 1.480 | 37,6 | .930  | 23,6 | .425 | 10,8 | .170 | 4,3 | 1.035 | 26,3 | Black | 238 @ 100MHz      | .250                           | 6,3  | to | .400 | 10,2 | dia. |
| AS28B2032  | 28       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 230 @ 100MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| AS28B2032K | 28       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Black | 230 @ 100MHz      | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| AS28B2044  | 28       | 1.700 | 43,2 | 1.800 | 45,7 | 1.800 | 45,7 | .790 | 20,1 | .200 | 5,1 | 1.830 | 46,5 | Grey  | 260 @ 100MHz      | .500                           | 12,7 | to | .710 | 18,0 | dia. |
| AS28B2044K | 28       | 1.700 | 43,2 | 1.800 | 45,7 | 1.800 | 45,7 | .790 | 20,1 | .200 | 5,1 | 1.830 | 46,5 | Black | 260 @ 100MHz      | .500                           | 12,7 | to | .710 | 18,0 | dia. |
| AS33B2037  | 33       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Grey  | 23 @ 30MHz        | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS33B2037K | 33       | .790  | 20,1 | 1.450 | 36,8 | .770  | 19,6 | .350 | 8,9  | .200 | 5,1 | .885  | 22,5 | Black | 23 @ 30MHz        | .210                           | 5,3  | to | .300 | 7,6  | dia. |
| AS33B2032  | 33       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .250                           | 6,3  | to | .500 | 12,7 | dia. |
| AS33B2032K | 33       | 1.155 | 29,3 | 1.450 | 36,8 | 1.125 | 28,6 | .500 | 12,7 | .200 | 5,1 | 1.230 | 31,2 | Grey  | 27 @ 30MHz        | .250                           | 6,3  | to | .500 | 12,7 | dia. |



## Cable Snap

### WITH ADHESIVE MOUNT BASE.

Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a 1.0" (25,4mm) diameter. After closing around wire and claspng shut, assembly is ready for mounting.




| Part No.   | Material | A     |      | B     |      | C     |      | D    |      | E     |      | F     |      | Color | Impedance in OHMS | Maximum recommended cable size |   |   |      |      |      |
|------------|----------|-------|------|-------|------|-------|------|------|------|-------|------|-------|------|-------|-------------------|--------------------------------|---|---|------|------|------|
| CA28B1642  | 28       | .882  | 22,4 | .885  | 22,5 | .840  | 21,3 | .282 | 7,2  | .375  | 9,5  | .375  | 9,5  | Grey  | 100 @ 100MHz      | 0                              | 0 | 0 | .300 | 7,6  | dia. |
| CA28B1642K | 28       | .882  | 22,4 | .885  | 22,5 | .840  | 21,3 | .282 | 7,2  | .375  | 9,5  | .375  | 9,5  | Black | 100 @ 100MHz      | 0                              | 0 | 0 | .300 | 7,6  | dia. |
| CA28B2000  | 28       | 2.380 | 60,5 | 1.851 | 47,0 | 2.309 | 58,6 | .960 | 24,4 | 1.000 | 25,4 | 1.500 | 38,1 | Grey  | 380 @ 100MHz      | 0                              | 0 | 0 | 1.00 | 25,4 | dia. |
| CA28B2000K | 28       | 2.380 | 60,5 | 1.851 | 47,0 | 2.309 | 58,6 | .960 | 24,4 | 1.000 | 25,4 | 1.500 | 38,1 | Black | 380 @ 100MHz      | 0                              | 0 | 0 | 1.00 | 25,4 | dia. |




## Cable Snap

### WITH PRESS-FIT BUTTON MOUNT BASE.

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 1.0" (25,4mm) diameter. Includes a button mount base which press-fits into a .150" (3,8mm) diameter hole.

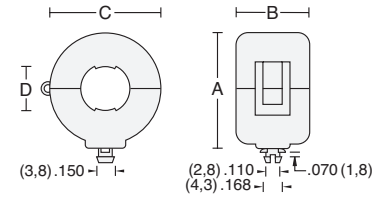


| Part No.   | Material | A     |      | B    |      | C     |      | D    |      | Color | Impedance in OHMS | Maximum recommended cable size |      |      |
|------------|----------|-------|------|------|------|-------|------|------|------|-------|-------------------|--------------------------------|------|------|
| CF28B1642  | 28       | .852  | 21,6 | .885 | 22,5 | .840  | 21,3 | .282 | 7,2  | Grey  | 100 @ 100MHz      | .300                           | 7,6  | dia. |
| CF28B1642K | 28       | .852  | 21,6 | .885 | 22,5 | .840  | 21,3 | .282 | 7,2  | Black | 100 @ 100MHz      | .300                           | 7,6  | dia. |
| CF28B1937  | 28       | 1.182 | 30,0 | .780 | 19,8 | 1.188 | 30,2 | .425 | 10,8 | Grey  | 117 @ 100MHz      | .400                           | 10,2 | dia. |
| CF28B1937K | 28       | 1.182 | 30,0 | .780 | 19,8 | 1.188 | 30,2 | .425 | 10,8 | Black | 117 @ 100MHz      | .400                           | 10,2 | dia. |



## Cable Snap

### WITH VARIABLE DIAMETER END PORTS.

Ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip the cable. The grip-locking action prevents lateral movement along the cable or wire bundle.




| Part No.   | Material | A     |      | B    |      | C     |      | D    |     | E    |     | F     |      | Color | Impedance in OHMS | Maximum recommended cable size |     |    |      |      |      |
|------------|----------|-------|------|------|------|-------|------|------|-----|------|-----|-------|------|-------|-------------------|--------------------------------|-----|----|------|------|------|
| CV28B1642  | 28       | .852  | 21,6 | .885 | 22,5 | .840  | 21,3 | .282 | 7,2 | .120 | 3,0 | 1.020 | 25,9 | Grey  | 100 @ 100MHz      | .120                           | 3,0 | to | .300 | 7,6  | dia. |
| CV28B1642K | 28       | .852  | 21,6 | .885 | 22,5 | .840  | 21,3 | .282 | 7,2 | .120 | 3,0 | 1.020 | 25,9 | Black | 100 @ 100MHz      | .120                           | 3,0 | to | .300 | 7,6  | dia. |
| CV28B1937  | 28       | 1.182 | 30,0 | .780 | 19,8 | 1.188 | 30,2 | .375 | 9,5 | .120 | 3,0 | .950  | 24,1 | Grey  | 117 @ 100MHz      | .200                           | 5,1 | to | .400 | 10,2 | dia. |
| CV28B1937K | 28       | 1.182 | 30,0 | .780 | 19,8 | 1.188 | 30,2 | .375 | 9,5 | .120 | 3,0 | .950  | 24,1 | Black | 117 @ 100MHz      | .200                           | 5,1 | to | .400 | 10,2 | dia. |



## Cable Snap

Ferrite assembly in fully enclosed nylon case. Snap closed around wire by claspng shut to position assembly. Cable tie-wraps may be threaded through the loops on each side.




| Part No.   | Material | A     | B    | C    | D    | E     | F    | G    | Color | Impedance in OHMS | Maximum recommended cable size |       |      |       |      |       |              |   |   |      |      |      |
|------------|----------|-------|------|------|------|-------|------|------|-------|-------------------|--------------------------------|-------|------|-------|------|-------|--------------|---|---|------|------|------|
| CS28B0642  | 28       | .923  | 23,4 | .708 | 18,0 | .780  | 19,8 | .300 | 7,6   | .143              | 3,6                            | .818  | 20,8 | 1.000 | 25,4 | Grey  | 100 @ 100MHz | 0 | 0 | .300 | 7,6  | dia. |
| CS28B0642K | 28       | .923  | 23,4 | .708 | 18,0 | .780  | 19,8 | .300 | 7,6   | .143              | 3,6                            | .818  | 20,8 | 1.000 | 25,4 | Black | 100 @ 100MHz | 0 | 0 | .300 | 7,6  | dia. |
| CS28B0805  | 28       | 1.095 | 27,8 | .476 | 12,1 | .965  | 24,5 | .345 | 8,8   | .100              | 2,5                            | 1.003 | 25,5 | .890  | 22,6 | Grey  | 73 @ 100MHz  | 0 | 0 | .345 | 8,7  | dia. |
| CS28B0805K | 28       | 1.095 | 27,8 | .476 | 12,1 | .965  | 24,5 | .345 | 8,8   | .100              | 2,5                            | 1.003 | 25,5 | .890  | 22,6 | Black | 73 @ 100MHz  | 0 | 0 | .345 | 8,7  | dia. |
| CS28B0937  | 28       | 1.222 | 31,0 | .691 | 17,6 | 1.078 | 27,4 | .425 | 10,8  | .098              | 2,5                            | 1.116 | 28,3 | .930  | 23,6 | Grey  | 117 @ 100MHz | 0 | 0 | .400 | 10,2 | dia. |
| CS28B0937K | 28       | 1.222 | 31,0 | .691 | 17,6 | 1.078 | 27,4 | .425 | 10,8  | .098              | 2,5                            | 1.116 | 28,3 | .930  | 23,6 | Black | 117 @ 100MHz | 0 | 0 | .400 | 10,2 | dia. |



## Cable Snap

Ferrite assembly in fully enclosed nylon case. Snap closed around wire by clamping shut to position assembly.

May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.



| Part No.   | Material | A     |       | B     |      | C     |       | D     |      | Color | Impedance in OHMS | Maximum recommended cable size |           |
|------------|----------|-------|-------|-------|------|-------|-------|-------|------|-------|-------------------|--------------------------------|-----------|
| CS25B1937  | 25       | 1.182 | 30,0  | .780  | 19,8 | 1.188 | 30,2  | .425  | 10,8 | Grey  | 305 @ 700MHz      | .400                           | 10,2 dia. |
| CS25B1937K | 25       | 1.182 | 30,0  | .780  | 19,8 | 1.188 | 30,2  | .425  | 10,8 | Black | 305 @ 700MHz      | .400                           | 10,2 dia. |
| CS28B1642  | 28       | .852  | 21,6  | .885  | 22,5 | .840  | 21,3  | .282  | 7,2  | Grey  | 100 @ 100MHz      | .300                           | 7,6 dia.  |
| CS28B1642K | 28       | .852  | 21,6  | .885  | 22,5 | .840  | 21,3  | .282  | 7,2  | Black | 100 @ 100MHz      | .300                           | 7,6 dia.  |
| CS28B1805  | 28       | 1.040 | 26,4  | .667  | 16,9 | 1.025 | 26,0  | .340  | 8,6  | Grey  | 73 @ 30MHz        | .345                           | 8,7 dia.  |
| CS28B1805K | 28       | 1.040 | 26,4  | .667  | 16,9 | 1.025 | 26,0  | .340  | 8,6  | Black | 73 @ 30MHz        | .345                           | 8,7 dia.  |
| CS28B1937  | 28       | 1.182 | 30,0  | .780  | 19,8 | 1.188 | 30,2  | .425  | 10,8 | Grey  | 117 @ 100MHz      | .400                           | 10,2 dia. |
| CS28B1937K | 28       | 1.182 | 30,0  | .780  | 19,8 | 1.188 | 30,2  | .425  | 10,8 | Black | 117 @ 100MHz      | .400                           | 10,2 dia. |
| CS28B1984  | 28       | 1.218 | 30,9  | .705  | 17,9 | 1.220 | 31,0  | .525  | 13,3 | Grey  | 62 @ 100MHz       | .520                           | 13,2 dia. |
| CS28B1984K | 28       | 1.218 | 30,9  | .705  | 17,9 | 1.220 | 31,0  | .525  | 13,3 | Black | 62 @ 100MHz       | .520                           | 13,2 dia. |
| CS28B1501  | 28       | 1.725 | 43,8  | 1.232 | 31,3 | 1.720 | 43,7  | .710  | 18,0 | Grey  | 177 @ 100MHz      | .750                           | 19,1 dia. |
| CS28B1501K | 28       | 1.725 | 43,8  | 1.232 | 31,3 | 1.720 | 43,7  | .710  | 18,0 | Black | 177 @ 100MHz      | .750                           | 19,1 dia. |
| CS28B2000  | 28       | 2.350 | 59,7  | 1.851 | 47,0 | 2.309 | 58,6  | .960  | 24,4 | Grey  | 380 @ 100MHz      | 1.000                          | 25,4 dia. |
| CS28B2000K | 28       | 2.350 | 59,7  | 1.851 | 47,0 | 2.309 | 58,6  | .960  | 24,4 | Black | 380 @ 100MHz      | 1.000                          | 25,4 dia. |
| CS28B4000  | 28       | 4.500 | 114,3 | 1.851 | 47,0 | 4.687 | 119,0 | 1.960 | 49,8 | Grey  | 290 @ 100MHz      | 2.000                          | 50,8 dia. |
| CS28B4000K | 28       | 4.500 | 114,3 | 1.851 | 47,0 | 4.687 | 119,0 | 1.960 | 49,8 | Black | 290 @ 100MHz      | 2.000                          | 50,8 dia. |
| CS33B1805  | 33       | 1.040 | 26,4  | .667  | 16,9 | 1.025 | 26,0  | .340  | 8,6  | Grey  | 22 @ 30MHz        | .345                           | 8,7 dia.  |
| CS33B1805K | 33       | 1.040 | 26,4  | .667  | 16,9 | 1.025 | 26,0  | .340  | 8,6  | Black | 22 @ 30MHz        | .345                           | 8,7 dia.  |
| CS33B2000  | 33       | 2.350 | 59,7  | 1.851 | 47,0 | 2.309 | 58,6  | .960  | 24,4 | Grey  | 210 @ 30MHz       | 1.000                          | 25,4 dia. |
| CS33B2000K | 33       | 2.350 | 59,7  | 1.851 | 47,0 | 2.309 | 58,6  | .960  | 24,4 | Black | 210 @ 30MHz       | 1.000                          | 25,4 dia. |
| CS33B4000  | 33       | 4.500 | 114,3 | 1.851 | 47,0 | 4.687 | 119,0 | 1.960 | 49,8 | Grey  | 140 @ 30MHz       | 2.000                          | 50,8 dia. |
| CS33B4000K | 33       | 4.500 | 114,3 | 1.851 | 47,0 | 4.687 | 119,0 | 1.960 | 49,8 | Black | 140 @ 30MHz       | 2.000                          | 50,8 dia. |




## Low Profile Flat Cable Clamp

### SLIM-LINE FLAT CABLE CLAMP WITH CABLE GRIP OPENINGS.

Ferrite pair snaps together into the lowest profile nylon enclosure available. Three sizes accommodate flat cables up to 40-conductors. Internal grip-lock tabs maintain mounting position. Mounts also with flat-head screws through the .120" (3,0mm) diameter holes in the bottom by temporarily removing the lower ferrite half.

1. Place cable over lower half.
2. Align tabs and pockets on one end.
3. Rotate top half onto bottom clipping both sides in one smooth motion.

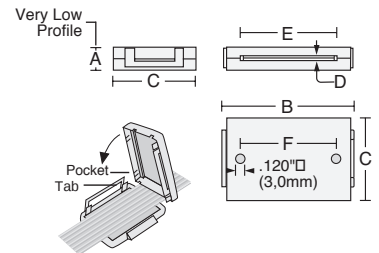

| Part No.   | Material | A    | B   | C     | D    | E     | F    | Color | Impedance in OHMS | Maximum recommended cable size |      |       |      |       |              |                           |            |
|------------|----------|------|-----|-------|------|-------|------|-------|-------------------|--------------------------------|------|-------|------|-------|--------------|---------------------------|------------|
| RC28B0765  | 28       | .370 | 9,4 | 1.065 | 27,1 | 1.312 | 33,3 | .038  | 0,97              | .547                           | 13,9 | .250  | 6,4  | Grey  | 142 @ 100MHz | 10 conductor, .038 X .500 | 1,0 X 12,7 |
| RC28B0765K | 28       | .370 | 9,4 | 1.065 | 27,1 | 1.312 | 33,3 | .038  | 0,97              | .547                           | 13,9 | .250  | 6,4  | Black | 142 @ 100MHz | 10 conductor, .038 X .500 | 1,0 X 12,7 |
| RC28B1265  | 28       | .370 | 9,4 | 1.560 | 39,6 | 1.312 | 33,3 | .038  | 0,97              | 1.047                          | 26,6 | .950  | 24,1 | Grey  | 148 @ 100MHz | 20 conductor, .038 X 1.00 | 1,0 X 25,4 |
| RC28B1265K | 28       | .370 | 9,4 | 1.560 | 39,6 | 1.312 | 33,3 | .038  | 0,97              | 1.047                          | 26,6 | .950  | 24,1 | Black | 148 @ 100MHz | 20 conductor, .038 X 1.00 | 1,0 X 25,4 |
| RC28B2265  | 28       | .370 | 9,4 | 2.560 | 65,0 | 1.312 | 33,3 | .038  | 0,97              | 2.047                          | 52,0 | 1.750 | 44,5 | Grey  | 154 @ 100MHz | 40 conductor, .038 X 2.00 | 1,0 X 50,8 |
| RC28B2265K | 28       | .370 | 9,4 | 2.560 | 65,0 | 1.312 | 33,3 | .038  | 0,97              | 2.047                          | 52,0 | 1.750 | 44,5 | Black | 154 @ 100MHz | 40 conductor, .038 X 2.00 | 1,0 X 50,8 |




## Low Profile Flat Cable Clamp With Adhesive Mount

### SLIM-LINE FLAT CABLE CLAMP WITH CABLE GRIP OPENINGS.

Ferrite pair snaps together into the lowest profile nylon enclosure available. Three sizes accommodate flat cables up to 40-conductors. Internal grip-lock tabs apply pressure on cable to maintain mounting position. Installs easily on any mounting surface by removing liner from foam adhesive base pad. Excellent for flex-circuits.

1. Place cable over lower half.
2. Align tabs and pockets on one end.
3. Rotate top half onto bottom clipping both sides in one smooth motion.

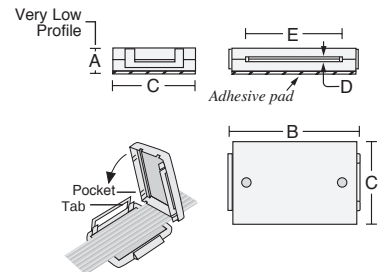


| Part No.   | Material | A    | B    | C     | D    | E     | Color | Impedance in OHMS | Maximum recommended cable size |       |      |       |              |                           |            |
|------------|----------|------|------|-------|------|-------|-------|-------------------|--------------------------------|-------|------|-------|--------------|---------------------------|------------|
| RA28B0765  | 28       | .400 | 10,2 | 1.065 | 27,1 | 1.312 | 33,3  | .038              | 0,97                           | .547  | 13,9 | Grey  | 142 @ 100MHz | 10 conductor, .038 X .500 | 1,0 X 12,7 |
| RA28B0765K | 28       | .400 | 10,2 | 1.065 | 27,1 | 1.312 | 33,3  | .038              | 0,97                           | .547  | 13,9 | Black | 142 @ 100MHz | 10 conductor, .038 X .500 | 1,0 X 12,7 |
| RA28B1265  | 28       | .400 | 10,2 | 1.560 | 39,6 | 1.312 | 33,3  | .038              | 0,97                           | 1.047 | 26,6 | Grey  | 148 @ 100MHz | 20 conductor, .038 X 1.00 | 1,0 X 25,4 |
| RA28B1265K | 28       | .400 | 10,2 | 1.560 | 39,6 | 1.312 | 33,3  | .038              | 0,97                           | 1.047 | 26,6 | Black | 148 @ 100MHz | 20 conductor, .038 X 1.00 | 1,0 X 25,4 |
| RA28B2265  | 28       | .400 | 10,2 | 2.560 | 65,0 | 1.312 | 33,3  | .038              | 0,97                           | 2.047 | 52,0 | Grey  | 154 @ 100MHz | 40 conductor, .038 X 2.00 | 1,0 X 50,8 |
| RA28B2265K | 28       | .400 | 10,2 | 2.560 | 65,0 | 1.312 | 33,3  | .038              | 0,97                           | 2.047 | 52,0 | Black | 154 @ 100MHz | 40 conductor, .038 X 2.00 | 1,0 X 50,8 |

## Flat Cable Clamp

### WITH FULL OUTER ENCLOSURE.

Ferrite assembly in fully enclosed nylon case. Four sizes functional with flat cables up to 64-conductor widths. Internal grip-lock tabs apply pressure on cable to maintain mounting position.

May also be mounted with flat-head screws through the .120" (3,0mm) diameter holes on 1.25" (31,8mm) centers in the bottom by temporarily removing the lower ferrite half. Excellent for flex-circuits.




| Part No.   | Material | A    | B    | C    | D     | E     | Color | Impedance in OHMS | Maximum recommended cable size                                         |
|------------|----------|------|------|------|-------|-------|-------|-------------------|------------------------------------------------------------------------|
| RC28B1729  | 28       | .670 | 17,0 | 2.03 | 51,6  | 1.312 | 33,3  | .060              | 1,5 1.355 34,4 Grey 200 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8  |
| RC28B1729K | 28       | .670 | 17,0 | 2.03 | 51,6  | 1.312 | 33,3  | .060              | 1,5 1.355 34,4 Black 200 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8 |
| RC28B2480  | 28       | .670 | 17,0 | 2.76 | 70,1  | 1.312 | 33,3  | .060              | 1,5 2.047 52,0 Grey 250 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8  |
| RC28B2480K | 28       | .670 | 17,0 | 2.76 | 70,1  | 1.312 | 33,3  | .060              | 1,5 2.047 52,0 Black 250 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8 |
| RC28B3012  | 28       | .670 | 17,0 | 3.26 | 82,8  | 1.312 | 33,3  | .060              | 1,5 2.540 64,5 Grey 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5  |
| RC28B3012K | 28       | .670 | 17,0 | 3.26 | 82,8  | 1.312 | 33,3  | .060              | 1,5 2.540 64,5 Black 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5 |
| RC28B4340  | 28       | .755 | 19,2 | 4.61 | 117,1 | 1.312 | 33,3  | .104              | 2,6 3.240 82,3 Grey 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 81,3  |
| RC28B4340K | 28       | .755 | 19,2 | 4.61 | 117,1 | 1.312 | 33,3  | .104              | 2,6 3.240 82,3 Black 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 81,3 |

## Flat Cable Clamp With Adhesive Mount

### WITH FULL OUTER ENCLOSURE.

Ferrite assembly in fully enclosed nylon case. Four sizes functional with flat cables up to 64-conductor widths. Internal grip-lock tabs apply pressure on cable to maintain mounting position.




| Part No.   | Material | A    | B    | C    | D     | E     | Color | Impedance in OHMS | Maximum recommended cable size                                         |
|------------|----------|------|------|------|-------|-------|-------|-------------------|------------------------------------------------------------------------|
| RA28B1729  | 28       | .700 | 17,8 | 2.03 | 51,6  | 1.312 | 33,3  | .060              | 1,5 1.355 34,4 Grey 200 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8  |
| RA28B1729K | 28       | .700 | 17,8 | 2.03 | 51,6  | 1.312 | 33,3  | .060              | 1,5 1.355 34,4 Black 200 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8 |
| RA28B2480  | 28       | .700 | 17,8 | 2.76 | 70,1  | 1.312 | 33,3  | .060              | 1,5 2.047 52,0 Grey 250 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8  |
| RA28B2480K | 28       | .700 | 17,8 | 2.76 | 70,1  | 1.312 | 33,3  | .060              | 1,5 2.047 52,0 Black 250 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8 |
| RA28B3012  | 28       | .700 | 17,8 | 3.26 | 82,8  | 1.312 | 33,3  | .060              | 1,5 2.540 64,5 Grey 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5  |
| RA28B3012K | 28       | .700 | 17,8 | 3.26 | 82,8  | 1.312 | 33,3  | .060              | 1,5 2.540 64,5 Black 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5 |
| RA28B4340  | 28       | .785 | 19,9 | 4.61 | 117,1 | 1.312 | 33,3  | .104              | 2,6 3.240 82,3 Grey 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 81,3  |
| RA28B4340K | 28       | .785 | 19,9 | 4.61 | 117,1 | 1.312 | 33,3  | .104              | 2,6 3.240 82,3 Black 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 81,3 |

## Flat Cable Clamp

### WITH SPLIT END CAPS, HARDWARE MOUNT.

Ferrite assembly press-fitted into a pair of nylon end caps. Mounts using screws, push-rivets, or other hardware. Ten sizes accommodate flat cables up to 64-conductor width.




| Part No.   | Material | A    | B    | C     | D     | E     | F    | G    | Color                                      | Impedance in OHMS | Maximum recommended cable size       |
|------------|----------|------|------|-------|-------|-------|------|------|--------------------------------------------|-------------------|--------------------------------------|
| SE25B0121  | 25       | .375 | 9,5  | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5 1.000 25,4 1.010 25,7 .900 22,9 Grey   | 245 @ 700MHz      | 20 conductor, .060 X 1.00 1,5 X 25,4 |
| SE25B0121K | 25       | .375 | 9,5  | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5 1.000 25,4 1.010 25,7 .900 22,9 Black  | 245 @ 700MHz      | 20 conductor, .060 X 1.00 1,5 X 25,4 |
| SE28B0071  | 28       | .375 | 9,5  | .815  | 20,7  | 1.190 | 30,2 | .060 | 1,5 .470 11,9 .510 13,0 .900 22,9 Grey     | 49 @ 100MHz       | 10 conductor, .060 X .500 1,5 X 12,7 |
| SE28B0071K | 28       | .375 | 9,5  | .815  | 20,7  | 1.190 | 30,2 | .060 | 1,5 .470 11,9 .510 13,0 .900 22,9 Black    | 49 @ 100MHz       | 10 conductor, .060 X .500 1,5 X 12,7 |
| SE28B0121  | 28       | .375 | 9,5  | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5 1.000 25,4 1.010 25,7 .900 22,9 Grey   | 97 @ 100MHz       | 20 conductor, .060 X 1.00 1,5 X 25,4 |
| SE28B0121K | 28       | .375 | 9,5  | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5 1.000 25,4 1.010 25,7 .900 22,9 Black  | 97 @ 100MHz       | 20 conductor, .060 X 1.00 1,5 X 25,4 |
| SE28B0146  | 28       | .375 | 9,5  | 1.565 | 39,8  | 1.190 | 30,2 | .060 | 1,5 1.250 31,8 1.260 32,0 .900 22,9 Grey   | 120 @ 100MHz      | 26 conductor, .060 X 1.25 1,5 X 31,8 |
| SE28B0146K | 28       | .375 | 9,5  | 1.565 | 39,8  | 1.190 | 30,2 | .060 | 1,5 1.250 31,8 1.260 32,0 .900 22,9 Black  | 120 @ 100MHz      | 26 conductor, .060 X 1.25 1,5 X 31,8 |
| SE28B0221  | 28       | .375 | 9,5  | 2.315 | 58,8  | 1.190 | 30,2 | .060 | 1,5 2.000 50,8 2.010 51,1 .900 22,9 Grey   | 176 @ 100MHz      | 40 conductor, .060 X 2.00 1,5 X 50,8 |
| SE28B0221K | 28       | .375 | 9,5  | 2.315 | 58,8  | 1.190 | 30,2 | .060 | 1,5 2.000 50,8 2.010 51,1 .900 22,9 Black  | 176 @ 100MHz      | 40 conductor, .060 X 2.00 1,5 X 50,8 |
| SE28B3012  | 28       | .625 | 15,9 | 3.125 | 79,4  | 1.829 | 46,5 | .060 | 1,5 2.550 64,8 2.540 64,5 1.500 38,1 Grey  | 286 @ 100MHz      | 50 conductor, .060 X 2.50 1,5 X 63,5 |
| SE28B3012K | 28       | .625 | 15,9 | 3.125 | 79,4  | 1.829 | 46,5 | .060 | 1,5 2.550 64,8 2.540 64,5 1.500 38,1 Black | 286 @ 100MHz      | 50 conductor, .060 X 2.50 1,5 X 63,5 |
| SE28B4340  | 28       | .625 | 15,9 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6 3.875 98,4 3.240 82,3 1.500 38,1 Grey  | 325 @ 100MHz      | 64 conductor, .100 X 3.20 2,5 X 81,3 |
| SE28B4340K | 28       | .625 | 15,9 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6 3.875 98,4 3.240 82,3 1.500 38,1 Black | 325 @ 100MHz      | 64 conductor, .100 X 3.20 2,5 X 81,3 |
| SE33B4340  | 33       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6 3.875 98,4 3.240 82,3 1.500 38,1 Grey  | 79 @ 30MHz        | 64 conductor, .100 X 3.20 2,5 X 81,3 |
| SE33B4340K | 33       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6 3.875 98,4 3.240 82,3 1.500 38,1 Black | 79 @ 30MHz        | 64 conductor, .100 X 3.20 2,5 X 81,3 |




## Flat Cable Clamp With Adhesive Mount

### WITH SPLIT END CAPS.

Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. Ten sizes accommodate flat cables up to 64-conductor width.

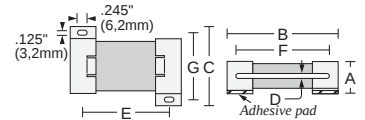


| Part No.   | Material | A    | B    | C     | D     | E     | F    | G    | Color | Impedance in OHMS | Maximum recommended cable size                                                     |
|------------|----------|------|------|-------|-------|-------|------|------|-------|-------------------|------------------------------------------------------------------------------------|
| SA25B0121  | 25       | .405 | 10,3 | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5   | 1.000             | 25,4 1.010 25,7 .900 22,9 Grey 245 @ 700MHz 20 conductor, .060 X 1.00 1,5 X 25,4   |
| SA25B0121K | 25       | .405 | 10,3 | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5   | 1.000             | 25,4 1.010 25,7 .900 22,9 Black 245 @ 700MHz 20 conductor, .060 X 1.00 1,5 X 25,4  |
| SA28B0071  | 28       | .405 | 10,3 | .815  | 20,7  | 1.190 | 30,2 | .060 | 1,5   | .470              | 11,9 .510 13,0 .900 22,9 Grey 49 @ 100MHz 10 conductor, .060 X .500 1,5 X 12,7     |
| SA28B0071K | 28       | .405 | 10,3 | .815  | 20,7  | 1.190 | 30,2 | .060 | 1,5   | .470              | 11,9 .510 13,0 .900 22,9 Black 49 @ 100MHz 10 conductor, .060 X .500 1,5 X 12,7    |
| SA28B0121  | 28       | .405 | 10,3 | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5   | 1.000             | 25,4 1.010 25,7 .900 22,9 Grey 97 @ 100MHz 20 conductor, .060 X 1.00 1,5 X 25,4    |
| SA28B0121K | 28       | .405 | 10,3 | 1.315 | 33,4  | 1.190 | 30,2 | .060 | 1,5   | 1.000             | 25,4 1.010 25,7 .900 22,9 Black 97 @ 100MHz 20 conductor, .060 X 1.00 1,5 X 25,4   |
| SA28B0146  | 28       | .405 | 10,3 | 1.565 | 39,8  | 1.190 | 30,2 | .060 | 1,5   | 1.250             | 31,8 1.260 32,0 .900 22,9 Grey 120 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8   |
| SA28B0146K | 28       | .405 | 10,3 | 1.565 | 39,8  | 1.190 | 30,2 | .060 | 1,5   | 1.250             | 31,8 1.260 32,0 .900 22,9 Black 120 @ 100MHz 26 conductor, .060 X 1.25 1,5 X 31,8  |
| SA28B0221  | 28       | .405 | 10,3 | 2.315 | 58,8  | 1.190 | 30,2 | .060 | 1,5   | 2.000             | 50,8 2.010 51,1 .900 22,9 Grey 176 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8   |
| SA28B0221K | 28       | .405 | 10,3 | 2.315 | 58,8  | 1.190 | 30,2 | .060 | 1,5   | 2.000             | 50,8 2.010 51,1 .900 22,9 Black 176 @ 100MHz 40 conductor, .060 X 2.00 1,5 X 50,8  |
| SA28B3012  | 28       | .655 | 16,6 | 3.125 | 79,4  | 1.829 | 46,5 | .060 | 1,5   | 2.550             | 64,8 2.540 64,5 1.500 38,1 Grey 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5  |
| SA28B3012K | 28       | .655 | 16,6 | 3.125 | 79,4  | 1.829 | 46,5 | .060 | 1,5   | 2.550             | 64,8 2.540 64,5 1.500 38,1 Black 286 @ 100MHz 50 conductor, .060 X 2.50 1,5 X 63,5 |
| SA28B4340  | 28       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6   | 3.875             | 98,4 3.240 82,3 1.500 38,1 Grey 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 8,2   |
| SA28B4340K | 28       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6   | 3.875             | 98,4 3.240 82,3 1.500 38,1 Black 325 @ 100MHz 64 conductor, .100 X 3.20 2,5 X 8,2  |
| SA33B4340  | 33       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6   | 3.875             | 98,4 3.240 82,3 1.500 38,1 Grey 79 @ 30MHz 64 conductor, .100 X 3.20 2,5 X 8,2     |
| SA33B4340K | 33       | .655 | 16,6 | 4.460 | 113,3 | 1.829 | 46,5 | .104 | 2,6   | 3.875             | 98,4 3.240 82,3 1.500 38,1 Black 79 @ 30MHz 64 conductor, .100 X 3.20 2,5 X 8,2    |




## Flat Cable Clamp

Ferrite assembly bonded in nylon mounting clamp. Nine sizes accommodate all flat cables up to 50-conductor width.




| Part No.   | Material | A    |      | B     |      | C     |      | D    |     | E     |      | Color | Impedance in OHMS | Maximum recommended cable size |            |
|------------|----------|------|------|-------|------|-------|------|------|-----|-------|------|-------|-------------------|--------------------------------|------------|
| FC25B2480  | 25       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .060 | 1,5 | 2.047 | 52,0 | Grey  | 790 @ 700MHz      | 40 conductor, .060 X 2.00      | 1,5 X 50.8 |
| FC25B2480K | 25       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .060 | 1,5 | 2.047 | 52,0 | Black | 790 @ 700MHz      | 40 conductor, .060 X 2.00      | 1,5 X 50.8 |
| FC28B0121  | 28       | .520 | 13,2 | 1.790 | 45,5 | .750  | 19,1 | .060 | 1,5 | 1.010 | 25,7 | Grey  | 97 @ 100MHz       | 20 conductor, .060 X 1.00      | 1,5 X 25.4 |
| FC28B0121K | 28       | .520 | 13,2 | 1.790 | 45,5 | .750  | 19,1 | .060 | 1,5 | 1.010 | 25,7 | Black | 97 @ 100MHz       | 20 conductor, .060 X 1.00      | 1,5 X 25.4 |
| FC28B1729  | 28       | .800 | 20,3 | 2.430 | 61,7 | 1.125 | 28,6 | .060 | 1,5 | 1.355 | 34,4 | Grey  | 200 @ 100MHz      | 26 conductor, .060 X 1.25      | 1,5 X 31.8 |
| FC28B1729K | 28       | .800 | 20,3 | 2.430 | 61,7 | 1.125 | 28,6 | .060 | 1,5 | 1.355 | 34,4 | Black | 200 @ 100MHz      | 26 conductor, .060 X 1.25      | 1,5 X 31.8 |
| FC28B3012  | 28       | .800 | 20,3 | 3.700 | 94,0 | 1.125 | 28,6 | .060 | 1,5 | 2.540 | 64,5 | Grey  | 286 @ 100MHz      | 50 conductor, .060 X 2.50      | 1,5 X 63.5 |
| FC28B3012K | 28       | .800 | 20,3 | 3.700 | 94,0 | 1.125 | 28,6 | .060 | 1,5 | 2.540 | 64,5 | Black | 286 @ 100MHz      | 50 conductor, .060 X 2.50      | 1,5 X 63.5 |



## Flat Cable Clamp With Adhesive Mount

Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Nine sizes accommodate all flat cables up to 50-conductor width.




| Part No.   | Material | A    |      | B     |      | C     |      | D    |     | E     |      | Color | Impedance in OHMS | Maximum recommended cable size |            |
|------------|----------|------|------|-------|------|-------|------|------|-----|-------|------|-------|-------------------|--------------------------------|------------|
| FA25B2480  | 25       | .830 | 21,1 | 3.180 | 80,8 | 1.125 | 28,6 | .060 | 1,5 | 2.047 | 52,0 | Grey  | 790 @ 700MHz      | 40 conductor, .060 X 2.00      | 1,5 X 50.8 |
| FA25B2480K | 25       | .830 | 21,1 | 3.180 | 80,8 | 1.125 | 28,6 | .060 | 1,5 | 2.047 | 52,0 | Black | 790 @ 700MHz      | 40 conductor, .060 X 2.00      | 1,5 X 50.8 |
| FA28B0121  | 28       | .550 | 14,0 | 1.790 | 45,5 | .750  | 19,1 | .060 | 1,5 | 1.010 | 25,7 | Grey  | 97 @ 100MHz       | 20 conductor, .060 X 1.00      | 1,5 X 25.4 |
| FA28B0121K | 28       | .550 | 14,0 | 1.790 | 45,5 | .750  | 19,1 | .060 | 1,5 | 1.010 | 25,7 | Black | 97 @ 100MHz       | 20 conductor, .060 X 1.00      | 1,5 X 25.4 |
| FA28B1729  | 28       | .830 | 21,1 | 2.430 | 61,7 | 1.125 | 28,6 | .060 | 1,5 | 1.355 | 34,4 | Grey  | 200 @ 100MHz      | 26 conductor, .060 X 1.25      | 1,5 X 31.8 |
| FA28B1729K | 28       | .830 | 21,1 | 2.430 | 61,7 | 1.125 | 28,6 | .060 | 1,5 | 1.355 | 34,4 | Black | 200 @ 100MHz      | 26 conductor, .060 X 1.25      | 1,5 X 31.8 |
| FA28B3012  | 28       | .830 | 21,1 | 3.700 | 94,0 | 1.125 | 28,6 | .060 | 1,5 | 2.540 | 64,5 | Grey  | 286 @ 100MHz      | 50 conductor, .060 X 2.50      | 1,5 X 63.5 |
| FA28B3012K | 28       | .830 | 21,1 | 3.700 | 94,0 | 1.125 | 28,6 | .060 | 1,5 | 2.540 | 64,5 | Black | 286 @ 100MHz      | 50 conductor, .060 X 2.50      | 1,5 X 63.5 |

## Flat Cable Clamp

### WITH DUAL PRESS FIT MOUNTS.

Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. Three sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.

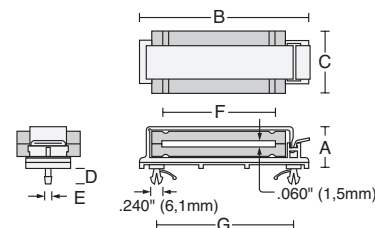


| Part No.   | Material | A    | B    | C     | D    | E     | F    | G    | Color | Impedance in OHMS | Maximum recommended cable size |       |      |       |      |       |              |                           |            |
|------------|----------|------|------|-------|------|-------|------|------|-------|-------------------|--------------------------------|-------|------|-------|------|-------|--------------|---------------------------|------------|
| FD28B2375  | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.050 | 26,7 | .280 | 7,1   | .183              | 4,6                            | 1.720 | 43,7 | 2.550 | 64,8 | Grey  | 195 @ 100MHz | 34 conductor, .060 X 1.70 | 1,5 X 43,2 |
| FD28B2375K | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.050 | 26,7 | .280 | 7,1   | .183              | 4,6                            | 1.720 | 43,7 | 2.550 | 64,8 | Black | 195 @ 100MHz | 34 conductor, .060 X 1.70 | 1,5 X 43,2 |
| FD28B2480  | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 2.047 | 52,0 | 2.550 | 64,8 | Grey  | 250 @ 100MHz | 40 conductor, .060 X 2.00 | 1,5 X 50,8 |
| FD28B2480K | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 2.047 | 52,0 | 2.550 | 64,8 | Black | 250 @ 100MHz | 40 conductor, .060 X 2.00 | 1,5 X 50,8 |

## Flat Cable Clamp

### WITH SINGLE PRESS FIT MOUNT.


Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Seven sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.



| Part No.   | Material | A    | B    | C     | D    | E     | F    | G    | Color | Impedance in OHMS | Maximum recommended cable size |       |      |      |     |       |              |                           |            |
|------------|----------|------|------|-------|------|-------|------|------|-------|-------------------|--------------------------------|-------|------|------|-----|-------|--------------|---------------------------|------------|
| FF28B1729  | 28       | .800 | 20,3 | 2.430 | 61,7 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 1.355 | 34,4 | .060 | 1,5 | Grey  | 200 @ 100MHz | 26 conductor, .060 X 1.25 | 1,5 X 31,8 |
| FF28B1729K | 28       | .800 | 20,3 | 2.430 | 61,7 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 1.355 | 34,4 | .060 | 1,5 | Black | 200 @ 100MHz | 26 conductor, .060 X 1.25 | 1,5 X 31,8 |
| FF28B2480  | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 2.047 | 52,0 | .060 | 1,5 | Grey  | 250 @ 100MHz | 40 conductor, .060 X 2.00 | 1,5 X 50,8 |
| FF28B2480K | 28       | .800 | 20,3 | 3.180 | 80,8 | 1.125 | 28,6 | .280 | 7,1   | .183              | 4,6                            | 2.047 | 52,0 | .060 | 1,5 | Black | 250 @ 100MHz | 40 conductor, .060 X 2.00 | 1,5 X 50,8 |

## Rectangular Solids


Solid ferrite suppressors configured to accept flat ribbon cables. Must be installed prior to termination of the cable. High tack adhesive mounting pad secures the cable routing to a fixed point on almost any surface. Can be stacked one on top of another. A variety of designs accommodate special installation and insertion loss requirements.




| Part No.  | Material | A     |      | B     |      | C     |      | D     |      | E    |      | Impedance in OHMS | Maximum recommended cable size |            |
|-----------|----------|-------|------|-------|------|-------|------|-------|------|------|------|-------------------|--------------------------------|------------|
| 28B0785   | 28       | .785  | 19,9 | .515  | 13,1 | 1.100 | 27,9 | .445  | 11,3 | .145 | 3,7  | 170 @ 100MHz      | 10 conductor, .145 X .500      | 3,7 X 12,7 |
| 28B1531   | 28       | 1.530 | 38,9 | 1.045 | 26,5 | 1.125 | 28,6 | 1.055 | 26,8 | .510 | 13,0 | 196 @ 100MHz      | 20 conductor, .210 X 1.00      | 5,3 X 25,4 |
| 28B1775   | 28       | 1.775 | 45,1 | 1.355 | 34,4 | 1.125 | 28,6 | .520  | 13,2 | .060 | 1,5  | 293 @ 100MHz      | 26 conductor, .060 X 1.30      | 1,5 X 33,0 |
| 28B1101   | 28       | 1.101 | 28,0 | .902  | 22,9 | .577  | 14,7 | .335  | 8,5  | .059 | 1,5  | 133 @ 100MHz      | 18 conductor, .059 X .900      | 1,5 X 22,9 |
| 28B1775-1 | 28       | 1.775 | 45,1 | 1.355 | 34,4 | .500  | 12,7 | .520  | 13,2 | .060 | 1,5  | 151 @ 100MHz      | 26 conductor, .060 X 1.30      | 1,5 X 33,0 |
| 28B3149   | 28       | 3.149 | 80,0 | 2.700 | 68,6 | .500  | 12,7 | .502  | 12,8 | .075 | 1,9  | 93 @ 100MHz       | 50 conductor, .075 X 2.70      | 1,9 X 68,5 |

## Rectangular Solids With Adhesive Mount

Solid ferrite suppressors configured to accept flat ribbon cables. Must be installed prior to termination of the cable. Can be stacked one on top of another. A variety of designs accommodate special installation and insertion loss requirements.




| Part No.    | Material | A     | B    |       | C    | D     |      | E     | Impedance in OHMS |      | Maximum recommended cable size |              |                           |            |
|-------------|----------|-------|------|-------|------|-------|------|-------|-------------------|------|--------------------------------|--------------|---------------------------|------------|
| SM28B0785   | 28       | .785  | 19,9 | .515  | 13,1 | 1.100 | 27,9 | .445  | 11,3              | .145 | 3,7                            | 170 @ 100MHz | 10 conductor, .145 X .500 | 3,7 X 12,7 |
| SM28B1531   | 28       | 1.530 | 38,9 | 1.045 | 26,5 | 1.125 | 28,6 | 1.055 | 26,8              | .510 | 13,0                           | 196 @ 100MHz | 20 conductor, .210 X 1.00 | 5,3 X 25,4 |
| SM28B1775   | 28       | 1.775 | 45,1 | 1.355 | 34,4 | 1.125 | 28,6 | .520  | 13,2              | .060 | 1,5                            | 293 @ 100MHz | 26 conductor, .060 X 1.30 | 1,5 X 33,0 |
| SM28B1101   | 28       | 1.101 | 28,0 | .902  | 22,9 | .577  | 14,7 | .335  | 8,5               | .059 | 1,5                            | 133 @ 100MHz | 18 conductor, .059 X .900 | 1,5 X 22,9 |
| SM28B1775-1 | 28       | 1.775 | 45,1 | 1.355 | 34,4 | .500  | 12,7 | .520  | 13,2              | .060 | 1,5                            | 151 @ 100MHz | 26 conductor, .060 X 1.30 | 1,5 X 33,0 |
| SM28B3149   | 28       | 3.149 | 80,0 | 2.700 | 68,6 | .500  | 12,7 | .502  | 12,8              | .075 | 1,9                            | 93 @ 100MHz  | 50 conductor, .075 X 2.70 | 1,9 X 68,5 |




## Low Profile Solids

Excellent for thin flex circuits and SCSI 2 flat cables on .025" (0,64mm) centers. Six sizes accommodate cable widths up to 2.00" (50,8mm).




| Part No.    | Material | A     |      | B     |      | C     |      | D    |     | E    |     | Impedance in OHMS | Maximum recommended cable size |             |             |
|-------------|----------|-------|------|-------|------|-------|------|------|-----|------|-----|-------------------|--------------------------------|-------------|-------------|
| 28R0760     | 28       | .760  | 19,3 | .510  | 13,0 | 1.125 | 28,6 | .300 | 7,6 | .051 | 1,3 | 150 @ 100MHz      | 10 conductor,                  | .051 X .510 | 1,3 X 13,0  |
| FX28R0984-2 | 28       | .984  | 25,0 | .709  | 18,0 | .630  | 16,0 | .303 | 7,7 | .035 | 0,9 | 170 @ 100MHz      |                                | .030 X .700 | 0,76 X 17,8 |
| 28R1127     | 28       | 1.125 | 28,6 | .925  | 23,5 | 1.220 | 31,0 | .303 | 7,7 | .066 | 1,7 | 188 @ 100MHz      | 18 conductor,                  | .060 X .900 | 1,5 X 22,9  |
| 28R1127-2   | 28       | 1.125 | 28,6 | .925  | 23,5 | .980  | 24,9 | .303 | 7,7 | .066 | 1,7 | 151 @ 100MHz      | 18 conductor,                  | .060 X .900 | 1,5 X 22,9  |
| FX28R1261-2 | 28       | 1.260 | 32,0 | .988  | 25,1 | .382  | 9,7  | .303 | 7,7 | .035 | 0,9 | 135 @ 100MHz      |                                | .030 X .980 | 0,76 X 24,9 |
| 28R1260     | 28       | 1.260 | 32,0 | 1.010 | 25,7 | 1.125 | 28,6 | .300 | 7,6 | .051 | 1,3 | 237 @ 100MHz      | 20 conductor,                  | .051 X 1.01 | 1,3 X 25,7  |
| FX28R1457-4 | 28       | 1.457 | 37,0 | 1.299 | 33,0 | .530  | 13,5 | .177 | 4,5 | .020 | 0,5 | 140 @ 100MHz      |                                | .018 X 1.29 | 0,46 X 32,8 |
| 28R1575     | 28       | 1.575 | 40,0 | 1.325 | 33,7 | 1.125 | 28,6 | .300 | 7,6 | .051 | 1,3 | 160 @ 100MHz      | 26 conductor,                  | .051 X 1.30 | 1,3 X 33,0  |
| 28R1953     | 28       | 1.953 | 49,6 | 1.732 | 44,0 | .472  | 12,0 | .288 | 7,3 | .059 | 1,5 | 109 @ 100MHz      | 34 conductor,                  | .059 X 1.70 | 1,5 X 43,2  |



## Low Profile Solids With Adhesive Mount

Excellent for thin flex circuits and SCSI 2 flat cables on .025" (0,64mm) centers. Six sizes accommodate cable widths up to 2.00" (50,8mm). High tack adhesive mounting pad secures to almost any surface. Can be stacked one on top of another.




| Part No.     | Material | A     | B    | C     | D    | E     | Impedance in OHMS |      |     | Maximum recommended cable size |     |              |                           |             |
|--------------|----------|-------|------|-------|------|-------|-------------------|------|-----|--------------------------------|-----|--------------|---------------------------|-------------|
| SM28R0760    | 28       | .760  | 19,3 | .510  | 13,0 | 1.125 | 28,6              | .330 | 8,4 | .051                           | 1,3 | 150 @ 100MHz | 10 conductor, .051 X .510 | 1,3 X 13,0  |
| FX28R0984-2A | 28       | .984  | 25,0 | .709  | 18,0 | .630  | 16,0              | .333 | 8,5 | .035                           | 0,9 | 170 @ 100MHz | .030 X .700               | 0,76 X 17,8 |
| SM28R1127    | 28       | 1.125 | 28,6 | .925  | 23,5 | 1.220 | 31,0              | .333 | 8,5 | .066                           | 1,7 | 188 @ 100MHz | 18 conductor, .060 X .900 | 1,5 X 22,9  |
| SM28R1127-2  | 28       | 1.125 | 28,6 | .925  | 23,5 | .980  | 24,9              | .333 | 8,5 | .066                           | 1,7 | 151 @ 100MHz | 18 conductor, .060 X .900 | 1,5 X 22,9  |
| FX28R1261-2A | 28       | 1.260 | 32,0 | .988  | 25,1 | .382  | 9,7               | .333 | 8,5 | .035                           | 0,9 | 135 @ 100MHz | .030 X .980               | 0,76 X 24,9 |
| SM28R1260    | 28       | 1.260 | 32,0 | 1.010 | 25,7 | 1.125 | 28,6              | .330 | 8,4 | .051                           | 1,3 | 237 @ 100MHz | 20 conductor, .051 X 1.01 | 1,3 X 25,7  |
| FX28R1457-4A | 28       | 1.457 | 37,0 | 1.299 | 33,0 | .530  | 13,5              | .207 | 5,3 | .020                           | 0,5 | 140 @ 100MHz | .018 X 1.29               | 0,46 X 32,8 |
| SM28R1575    | 28       | 1.575 | 40,0 | 1.325 | 33,7 | 1.125 | 28,6              | .330 | 8,4 | .051                           | 1,3 | 160 @ 100MHz | 26 conductor, .051 X 1.30 | 1,3 X 33,0  |
| SM28R1953    | 28       | 1.953 | 49,6 | 1.732 | 44,0 | .472  | 12,0              | .318 | 8,1 | .059                           | 1,5 | 109 @ 100MHz | 34 conductor, .059 X 1.70 | 1,5 X 43,2  |



## Special Purpose Shielding Bar

For situations where extremely high amounts of attenuation are needed and/or multiple passes through a traditional ferrite I.D. are not practical or sufficient. Simply wrap cable in a spiral around bar for optimum absorption.

- One individual size fits most applications
- For round or flat cables wound axially or attached longitudinally
- Attachment with cable ties
- Sandwiching cable between two bars provides up to three times the impedance of a single bar depending on frequency




| Part No.  | Material | A    |     | B     |       | C   |      | Impedance in OHMS      |  | Maximum recommended cable size |
|-----------|----------|------|-----|-------|-------|-----|------|------------------------|--|--------------------------------|
| SB28B5630 | 28       | .365 | 9,3 | 5.630 | 143,0 | 1.0 | 25,4 | one pass: 500 @ 100MHz |  | application specific           |

## Special Purpose Shielding Bar With Adhesive Mount


For situations where extremely high amounts of attenuation are needed and/or multiple passes through a traditional ferrite I.D. are not practical or sufficient. Simply wrap cable in a spiral around bar for optimum absorption.

- One individual size fits most applications
- For round or flat cables wound axially or attached longitudinally
- Attachment with cable ties or adhesive pad
- Sandwiching cable between two bars provides up to three times the impedance of a single bar depending on frequency



\* Adhesive pad .030 (0,76)

| Part No.   | Material | A    |      | B     |       | C   |      | Impedance in OHMS |  |                        | Maximum recommended cable size |
|------------|----------|------|------|-------|-------|-----|------|-------------------|--|------------------------|--------------------------------|
| SB28B5630A | 28       | .395 | 10.0 | 5.630 | 143.0 | 1.0 | 25.4 |                   |  | one pass: 500 @ 100MHz | application specific           |




## Saddle Beads®

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

U-shaped with central opening extending directly to the outside radius for easy mounting. By simply straddling a cable or PCB component, a significant amount of magnetic coupling occurs, between 30%-40% of the impedance of our fully circumferential styles, depending on configuration.

Excellent for quick, economical applications, tight spaces, electronic enclosure cable routing, and especially direct mounting over leaded or surface mount printed circuit board components.

HALF-BEAD



+ Point of measured impedance (see impedance below)

| Part No.  | Material | A     |      | B    |      | C    |      | D     |      | E     |      | TYPE        | Impedance in OHMS | Maximum recommended cable size |      |      |
|-----------|----------|-------|------|------|------|------|------|-------|------|-------|------|-------------|-------------------|--------------------------------|------|------|
| SB28B1500 | 28       | 1.500 | 38,1 | .500 | 12,7 | .750 | 19,1 | 1.000 | 25,4 | 1.000 | 25,4 | half toroid | 75 @ 100MHz       | 1.000                          | 25,4 | dia. |


## Saddle Beads® With Adhesive Mount

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

U-shaped with central opening extending directly to the outside radius for easy mounting. By simply straddling a cable or PCB component, a significant amount of magnetic coupling occurs, between 30%-40% of the impedance of our fully circumferential styles, depending on configuration.

Excellent for quick, economical applications, tight spaces, electronic enclosure cable routing, and especially direct mounting over leaded or surface mount printed circuit board components.

HALF-BEAD



\* Adhesive mount base .030" (0,7mm) thick

+ Point of measured impedance (see impedance below)


| Part No.    | Material | A     |      | B    |      | C    |      | D     |      | E     |      | F | TYPE        | Impedance in OHMS | Maximum recommended cable size |           |
|-------------|----------|-------|------|------|------|------|------|-------|------|-------|------|---|-------------|-------------------|--------------------------------|-----------|
| SB28B1500AB | 28       | 1.500 | 38,1 | .500 | 12,7 | .780 | 19,8 | 1.000 | 25,4 | 1.000 | 25,4 |   | half toroid | 75 @ 100MHz       | 1.000                          | 25,4 dia. |

## Saddle Beads®

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular sleeve shape with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

HALF-SLEEVE



+ Point of measured impedance (see impedance below)

| Part No.  | Material | A    | B    | C    | D   | E    | TYPE | Impedance in OHMS | Maximum recommended cable size |       |      |             |             |                      |
|-----------|----------|------|------|------|-----|------|------|-------------------|--------------------------------|-------|------|-------------|-------------|----------------------|
| SB28B2031 | 28       | .536 | 13,6 | .125 | 3,2 | .270 | 6,9  | .250              | 6,4                            | 1.100 | 27,9 | half sleeve | 45 @ 100MHz | application specific |
| SB28B0010 | 28       | .325 | 8,3  | .062 | 1,6 | .163 | 4,1  | .125              | 3,2                            | .600  | 15,2 | half sleeve | 20 @ 100MHz | application specific |


## Saddle Beads® With Top Adhesive Mount

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular sleeve shape with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

When affixed with thermally conductive adhesive to flat components, such as semiconductors, heat sink thermal dissipation occurs, increasing component efficiency. Attaches to any surface with optional adhesive foam base or common electronic adhesives.

HALF-SLEEVE



\*\* Top mount base .030" (0,7mm)

+ Point of measured impedance (see impedance below)

| Part No.    | Material | A    | B    | C    | D   | E    | TYPE | Impedance in OHMS | Maximum recommended cable size |       |      |             |             |                      |
|-------------|----------|------|------|------|-----|------|------|-------------------|--------------------------------|-------|------|-------------|-------------|----------------------|
| SB28B2031AT | 28       | .536 | 13,6 | .125 | 3,2 | .300 | 7,6  | .250              | 6,4                            | 1.100 | 27,9 | half sleeve | 45 @ 100MHz | application specific |
| SB28B0010AT | 28       | .325 | 8,3  | .062 | 1,6 | .193 | 4,9  | .125              | 3,2                            | .600  | 15,2 | half sleeve | 20 @ 100MHz | application specific |


## Saddle Beads® With Bottom Adhesive Mount

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular sleeve shape with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

When affixed with thermally conductive adhesive to flat components, such as semiconductors, heat sink thermal dissipation occurs, increasing component efficiency. Attaches to any surface with optional adhesive foam base or common electronic adhesives.


HALF-SLEEVE



\* Bottom mount base .030" (0,7mm)

+ Point of measured impedance (see impedance below)


| Part No.    | Material | A    | B    | C    | D   | E    | TYPE | Impedance in OHMS | Maximum recommended cable size |       |      |             |             |                      |
|-------------|----------|------|------|------|-----|------|------|-------------------|--------------------------------|-------|------|-------------|-------------|----------------------|
| SB28B2031AB | 28       | .536 | 13,6 | .125 | 3,2 | .300 | 7,6  | .250              | 6,4                            | 1.100 | 27,9 | half sleeve | 45 @ 100MHz | application specific |
| SB28B0010AB | 28       | .325 | 8,3  | .062 | 1,6 | .193 | 4,9  | .125              | 3,2                            | .600  | 15,2 | half sleeve | 20 @ 100MHz | application specific |



## Saddle Beads®

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular sleeves or plate shapes with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.



+ Point of measured impedance (see impedance below)


| Part No.  | Material | A     |      | B    |     | C    |     | D     |      | E    |      | TYPE              | Impedance in OHMS | Maximum recommended cable size |
|-----------|----------|-------|------|------|-----|------|-----|-------|------|------|------|-------------------|-------------------|--------------------------------|
| SB28B0071 | 28       | .710  | 18,0 | .030 | 0,8 | .130 | 3,3 | .510  | 13,0 | .500 | 12,7 | rectangular plate | 23 @ 100MHz       | application specific           |
| SB28B0121 | 28       | 1.210 | 30,7 | .030 | 0,8 | .130 | 3,3 | 1.010 | 25,7 | .500 | 12,7 | rectangular plate | 35 @ 100MHz       | application specific           |

## Saddle Beads® With Top Adhesive Mount

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular plate shape with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

When affixed with thermally conductive adhesive to flat components, such as semiconductors, heat sink thermal dissipation occurs, increasing component efficiency. Attaches to any surface with optional adhesive foam base or common electronic adhesives.



\*\*Top mount base .030" (0,7mm)

+ Point of measured impedance (see impedance below)


| Part No.    | Material | A     |      | B    |     | C    |     | D     |      | E    |      | TYPE              | Impedance in OHMS | Maximum recommended cable size |
|-------------|----------|-------|------|------|-----|------|-----|-------|------|------|------|-------------------|-------------------|--------------------------------|
| SB28B0071AT | 28       | .710  | 18,0 | .030 | 0,8 | .160 | 4,0 | .510  | 13,0 | .500 | 12,7 | rectangular plate | 23 @ 100MHz       | application specific           |
| SB28B0121AT | 28       | 1.210 | 30,7 | .030 | 0,8 | .160 | 4,0 | 1.010 | 25,7 | .500 | 12,7 | rectangular plate | 35 @ 100MHz       | application specific           |

## Saddle Beads® With Bottom Adhesive Mount

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular plate shape with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

When affixed with thermally conductive adhesive to flat components, such as semiconductors, heat sink thermal dissipation occurs, increasing component efficiency. Attaches to any surface with optional adhesive foam base or common electronic adhesives.



\* Bottom mount base .030" (0,7mm)

+ Point of measured impedance (see impedance below)

| Part No.    | Material | A     | B    | C    | D   | E    | TYPE                     | Impedance in OHMS | Maximum recommended cable size |                      |
|-------------|----------|-------|------|------|-----|------|--------------------------|-------------------|--------------------------------|----------------------|
| SB28B0071AB | 28       | .710  | 18,0 | .030 | 0,8 | .160 | 4,0 .510 13,0 .500 12,7  | rectangular plate | 23 @ 100MHz                    | application specific |
| SB28B0121AB | 28       | 1.210 | 30,7 | .030 | 0,8 | .160 | 4,0 1.010 25,7 .500 12,7 | rectangular plate | 35 @ 100MHz                    | application specific |

Simply one of the most flexible  
and cost-effective cable shielding  
solutions on the market





## CIRCUIT BOARD SHIELDING

- Tech Clip
- Surface Mount Shields
- Standard CBS
- Modified CBS
- Custom Shielding
- Slot-Lok Shields
- One Piece Shield



## CONDUCTIVE ELASTOMERS

- Sheet Material
- Extrusions
- Molded
- Diecut
- Bonded O-Rings



## ENCLOSURE SHIELDING

- TechVENT EMI/RFI Vent Panels
- Copper Foil Tape
- Surface Mount Gaskets and Grounding Pads
- Mesh Washers
- Fabric Shielding Gaskets
- Beryllium Copper Fingerstock
- Conductive Foam Shielding
- TechSIL Oriented Wire
- TechMESH Knitted Wire
- TechMESH Tapes
- Standard and Custom Connector Gaskets



## THERMAL

- Thermal Gap Filler
- Insulators
- Tape
- Graphite
- Phase Change
- Grease



## MICROWAVE ABSORBERS

### Narrowband

- Tuned
- Cavity Resonance

### Wideband

- Low Profile
- Lossy Foam
- Reticulated Foam
- Pyramidal Foam

Leader Tech is a world-leading innovator and US-based manufacturer of EMI shielding products for circuit boards, enclosures and cables. In addition to our best selling standard, modified standard and custom CBS shields, Leader Tech offers an expansive line of beryllium copper fingerstock gaskets, conductive elastomers, advanced RF absorber materials, EMI/RFI ferrites and a wide variety of materials for excellent thermal solutions.

Visit [LeaderTechInc.com](http://LeaderTechInc.com) to download additional product catalogs

F2020-1



ISO 9001: 2015  
CERTIFIED

**LEADER  
TECH**   
a HEICO company

12420 Race Track Rd.  
Tampa, Florida 33626

866.TECH.EMI (866.832.4364)

Tel: 813.855.6921

Fax: 813.855.3291

[www.leadertechinc.com](http://www.leadertechinc.com)



[www.LeaderTechInc.com](http://www.LeaderTechInc.com)