

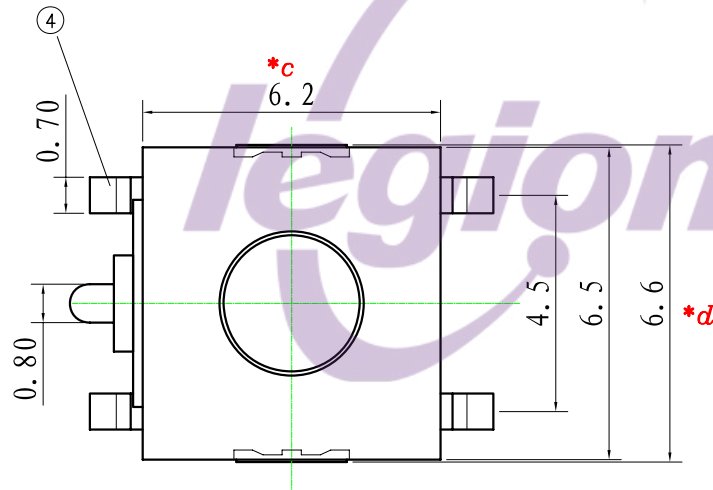


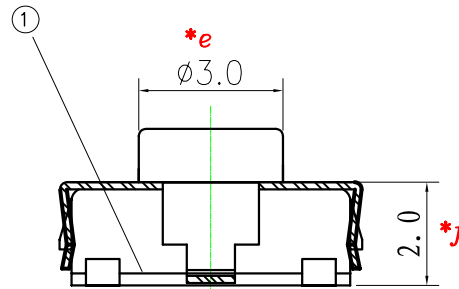

Circuit Diagram

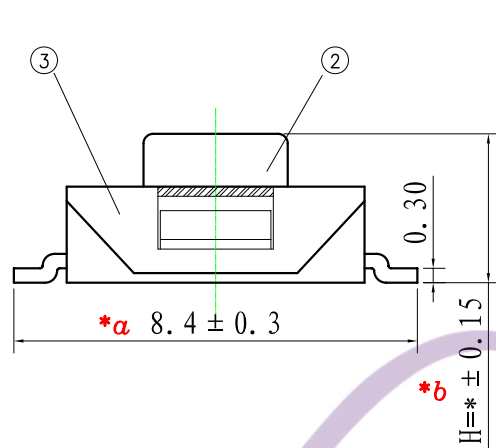


SPECIFICATION

1. Rating : DC12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC100V).
4. Withstanding voltage : 250VAC .
5. Operating Force: $160 \pm 50\text{gf}$
6. life test: 100,000 cycles.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

knob heighth

x (mm)	2.5	3.1	3.4	3.7	4.3	4.5	5.0
KNOB (H)	H2.5	H3.1	H3.4	H3.7	H4.3	H4.5	H5.0
适用选项	✓						

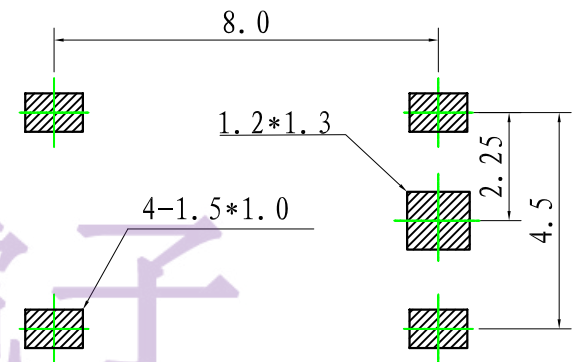

PCB LAND PATTERN

					TOLERANCE UNLESS SPECIFIED						
					UP TO 5mm: ± 0.1	ANGULAR					
					ABOVE 5mm: ± 0.2	$\pm 1^{\circ}$				NO	DATE
5	SPRING	PBS/SUS	1	Ag-Plated				REVISIONS			BY
4	CONTACT FOOT	BRASS	2	Ag-Plated	TITLE: TACT SWITCH			UNIT : MM	ROHS	DWN	
3	COVER	SUS	1		MODEL: TS-1157-025C-SU			SCALE: 1:1	COMPLIANT	CHK'D	
2	KNOB	PPA	1	BLACK/RDE/BLUE							
1	HOUSING	PPA	1	BLACK							
NO.	PART NAME	MATERIAL	QTY	FINISHING	东莞市六钧电子五金有限公司					PRO.AGL:	REV :A0