


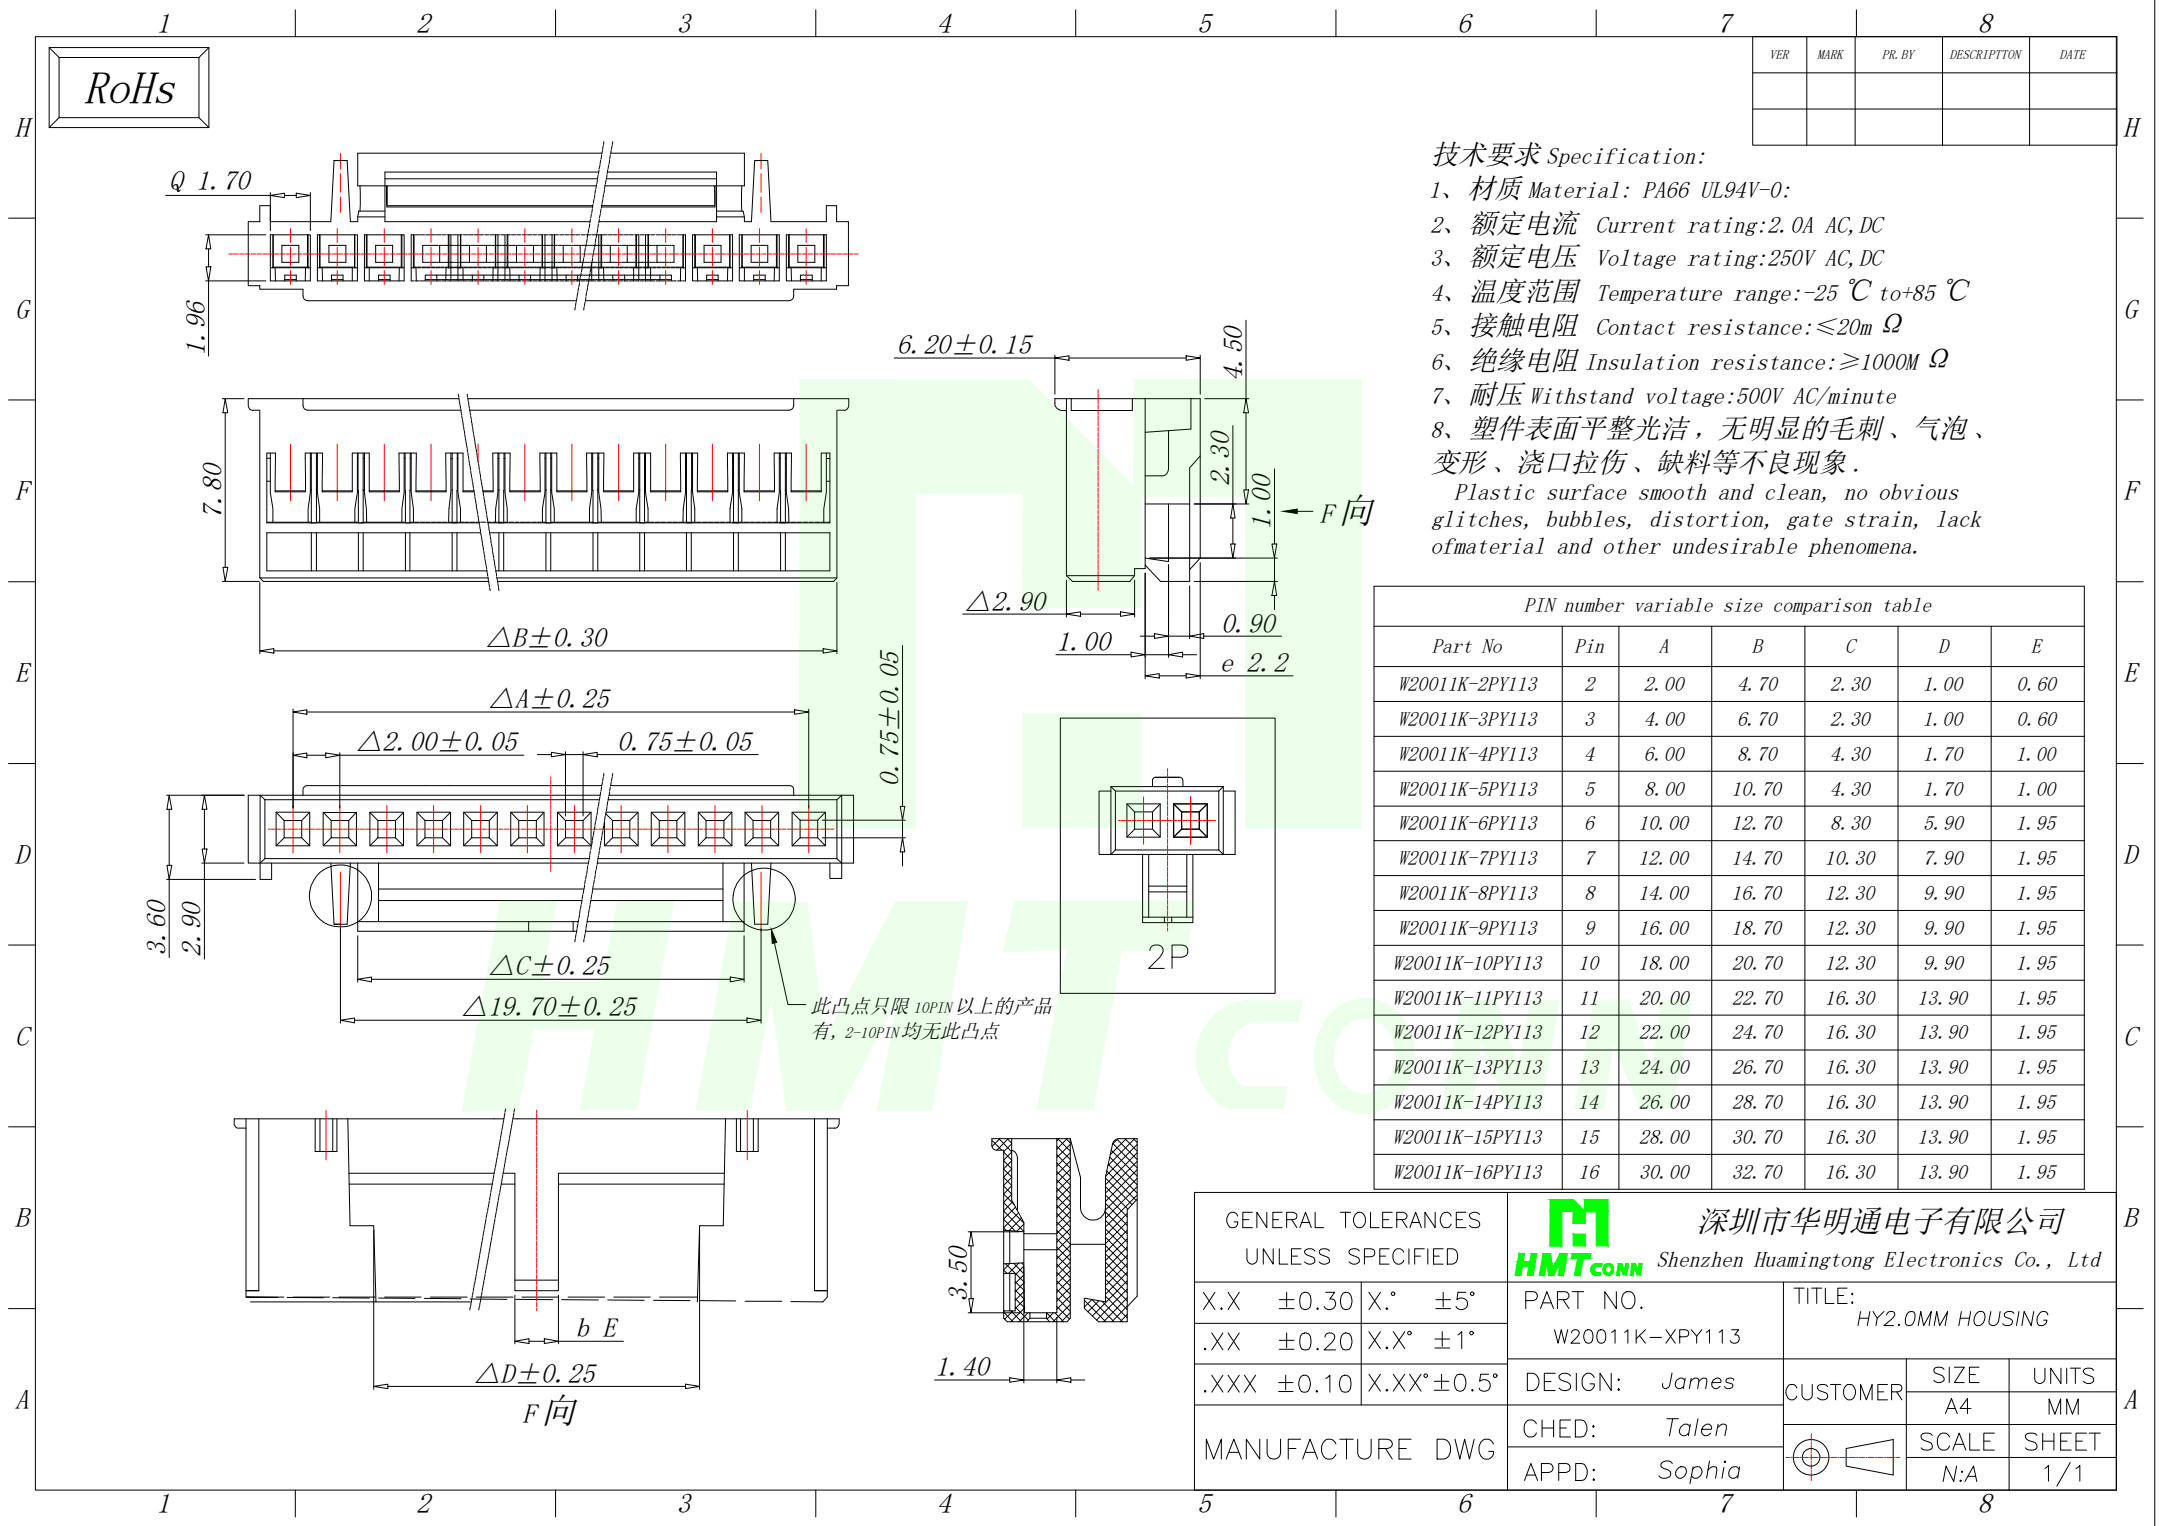

技术要求 Specification:

- 1、材质 Material: PA66 UL94V-0:
- 2、额定电流 Current rating: 2.0A AC, DC
- 3、额定电压 Voltage rating: 250V AC, DC
- 4、温度范围 Temperature range: -25°C to $+85^{\circ}\text{C}$
- 5、接触电阻 Contact resistance: $\leq 20\text{m}\Omega$
- 6、绝缘电阻 Insulation resistance: $\geq 1000\text{M}\Omega$
- 7、耐压 Withstand voltage: 500V AC/minute
- 8、塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。

Plastic surface smooth and clean, no obvious glitches, bubbles, distortion, gate strain, lack of material and other undesirable phenomena.

PIN number variable size comparison table

Part No	Pin	A	B	C	D	E
W20011K-2PY113	2	2.00	4.70	2.30	1.00	0.60
W20011K-3PY113	3	4.00	6.70	2.30	1.00	0.60
W20011K-4PY113	4	6.00	8.70	4.30	1.70	1.00
W20011K-5PY113	5	8.00	10.70	4.30	1.70	1.00
W20011K-6PY113	6	10.00	12.70	8.30	5.90	1.95
W20011K-7PY113	7	12.00	14.70	10.30	7.90	1.95
W20011K-8PY113	8	14.00	16.70	12.30	9.90	1.95
W20011K-9PY113	9	16.00	18.70	12.30	9.90	1.95
W20011K-10PY113	10	18.00	20.70	12.30	9.90	1.95
W20011K-11PY113	11	20.00	22.70	16.30	13.90	1.95
W20011K-12PY113	12	22.00	24.70	16.30	13.90	1.95
W20011K-13PY113	13	24.00	26.70	16.30	13.90	1.95
W20011K-14PY113	14	26.00	28.70	16.30	13.90	1.95
W20011K-15PY113	15	28.00	30.70	16.30	13.90	1.95
W20011K-16PY113	16	30.00	32.70	16.30	13.90	1.95

GENERAL TOLERANCES
UNLESS SPECIFIED

X.X	± 0.30	X. $^{\circ}$	$\pm 5^{\circ}$
.XX	± 0.20	X.X $^{\circ}$	$\pm 1^{\circ}$
.XXX	± 0.10	X.XX $^{\circ}$	$\pm 0.5^{\circ}$

MANUFACTURE DWG



深圳市华明通电子有限公司
Shenzhen Huamingtong Electronics Co., Ltd

PART NO.	W20011K-XPY113
DESIGN:	James
CHED:	Talen
APPD:	Sophia

TITLE: HY2.0MM HOUSING		
CUSTOMER	SIZE	UNITS
	A4	MM
	SCALE	SHEET
	N:A	1/1