


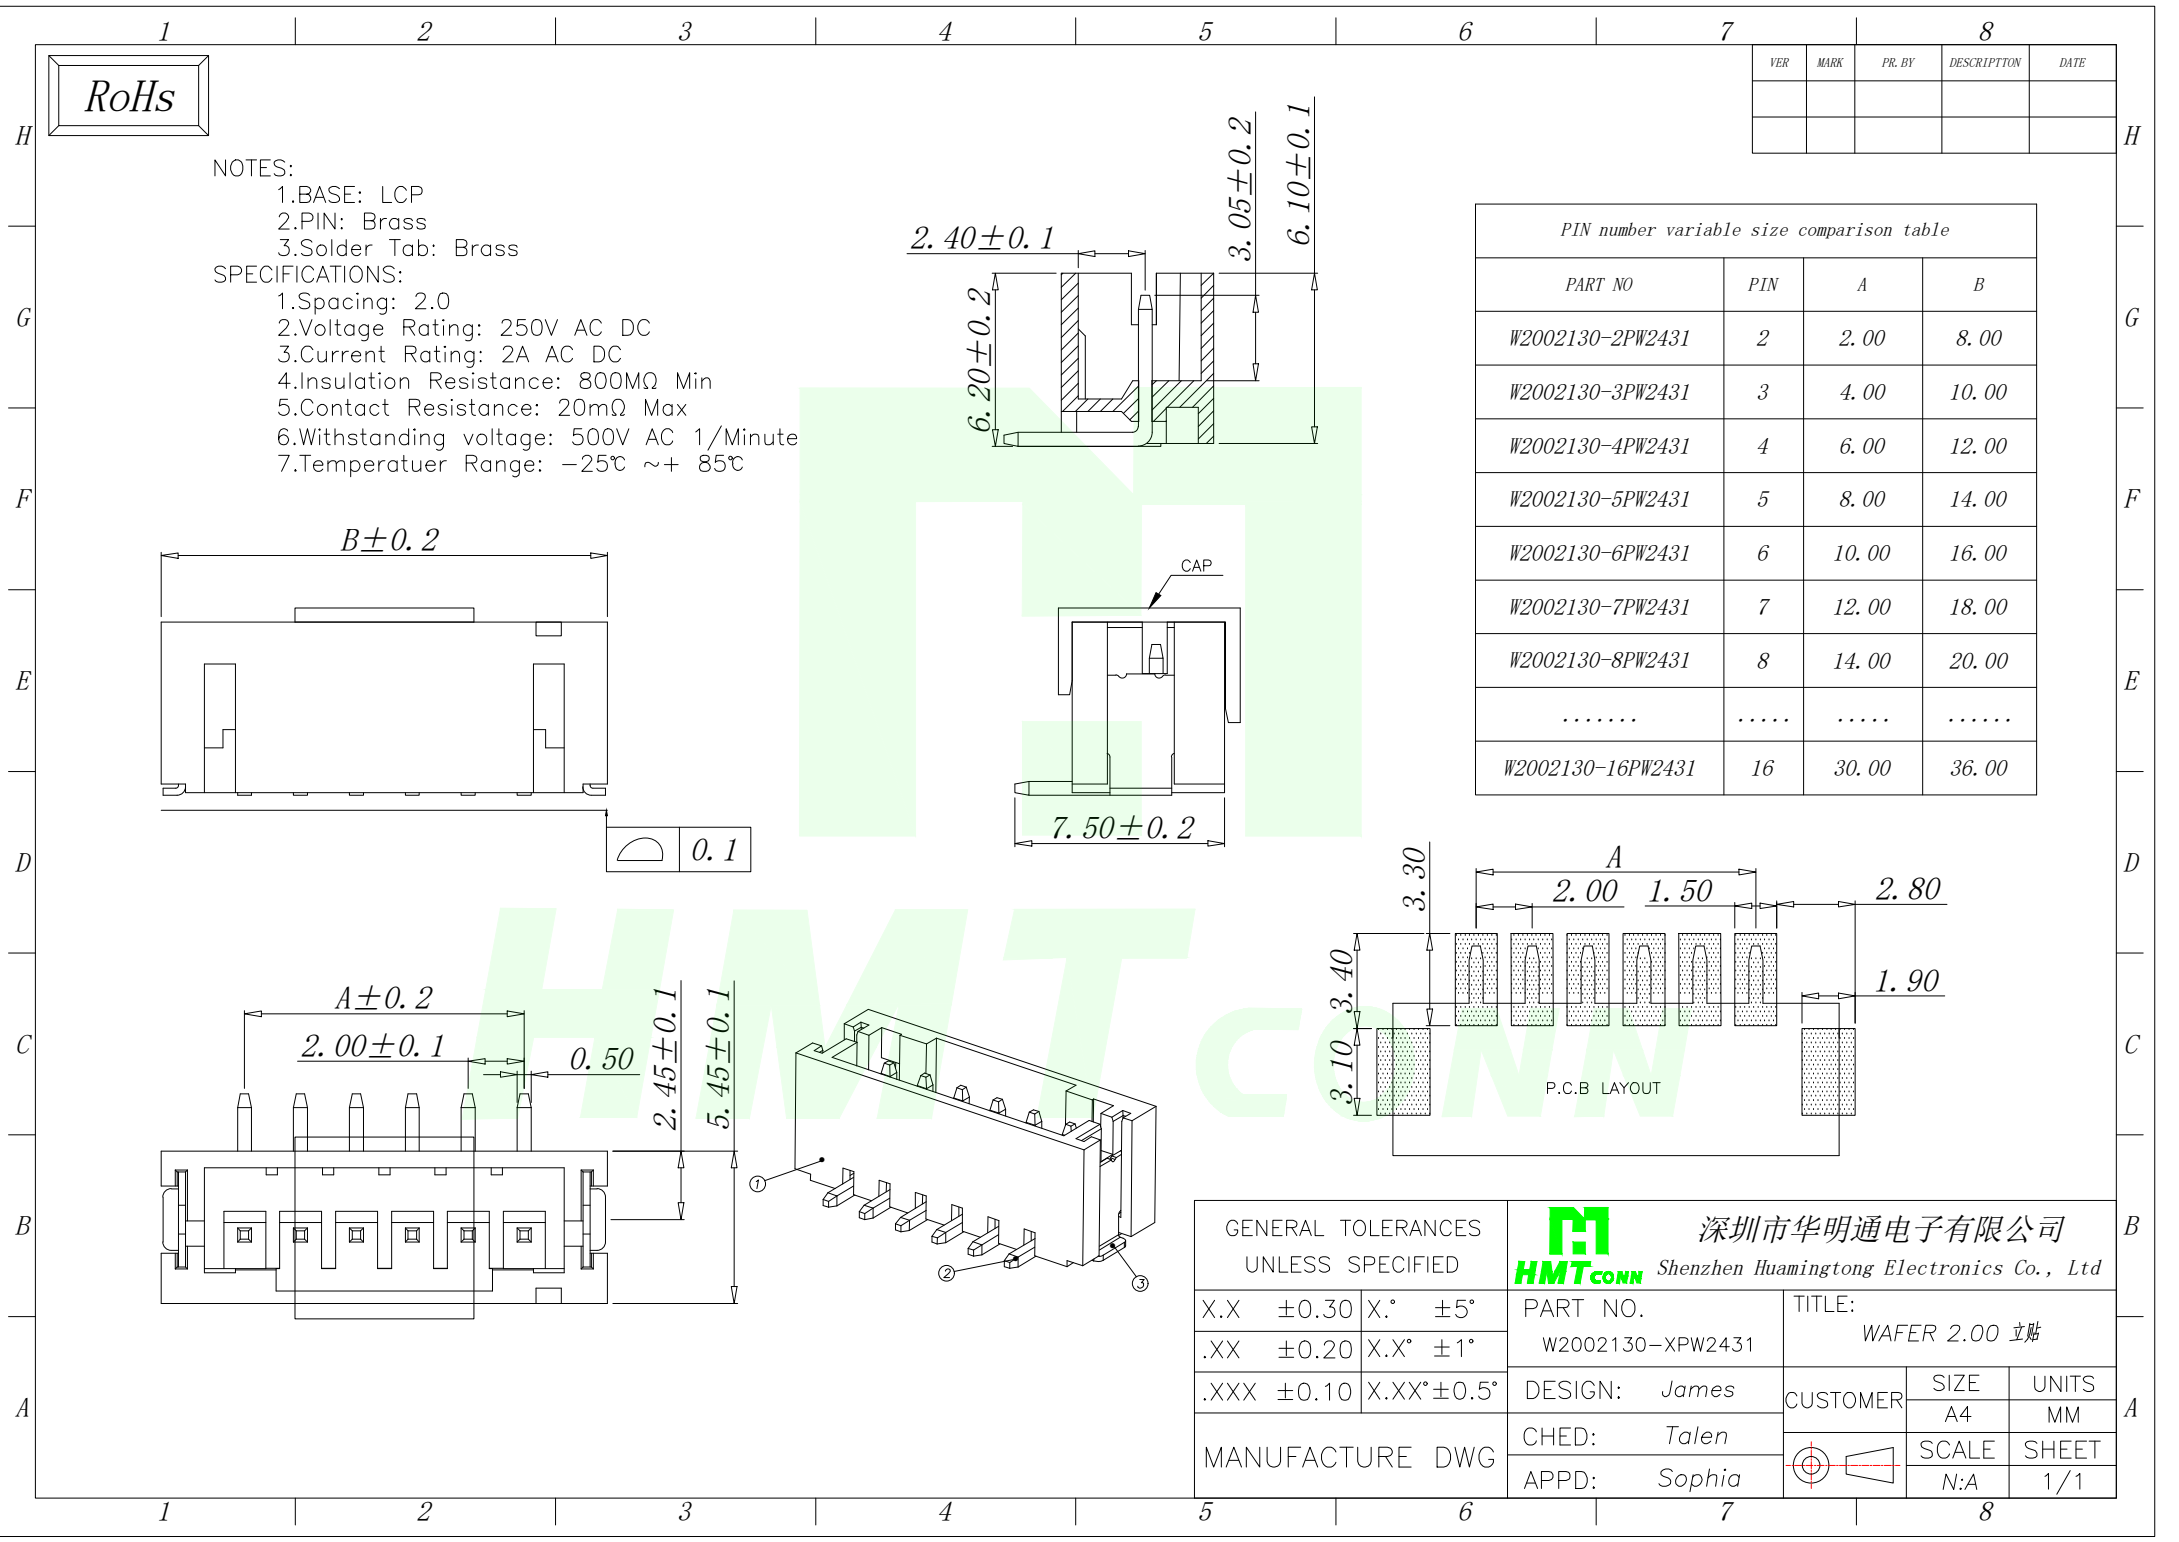


RoHS

- NOTES:
- 1.BASE: LCP
 - 2.PIN: Brass
 - 3.Solder Tab: Brass
- SPECIFICATIONS:
- 1.Spacing: 2.0
 - 2.Voltage Rating: 250V AC DC
 - 3.Current Rating: 2A AC DC
 - 4.Insulation Resistance: 800MΩ Min
 - 5.Contact Resistance: 20mΩ Max
 - 6.Withstanding voltage: 500V AC 1/Minute
 - 7.Temperatuer Range: -25℃ ~+ 85℃

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	A	B
W2002130-2PW2431	2	2.00	8.00
W2002130-3PW2431	3	4.00	10.00
W2002130-4PW2431	4	6.00	12.00
W2002130-5PW2431	5	8.00	14.00
W2002130-6PW2431	6	10.00	16.00
W2002130-7PW2431	7	12.00	18.00
W2002130-8PW2431	8	14.00	20.00
.....			
W2002130-16PW2431	16	30.00	36.00

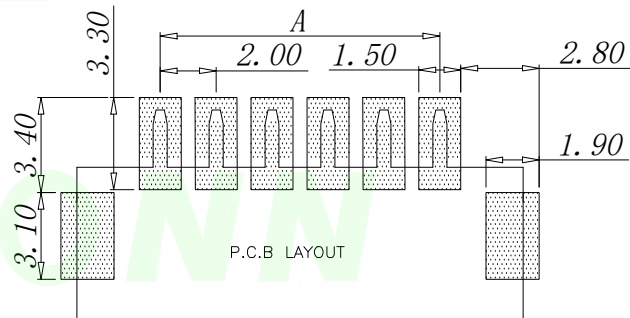

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W2002130-XPW2431	WAFER 2.00 立贴
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	
		APPD: Sophia	
			SIZE A4
			UNITS MM
			SCALE N:A
			SHEET 1/1