PIDG

TE Internal #: 2-35109-1


Closed Ring Tongue Terminal, 12 – 10 AWG, #10 Stud, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially

Insulated

View on TE.com >



Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

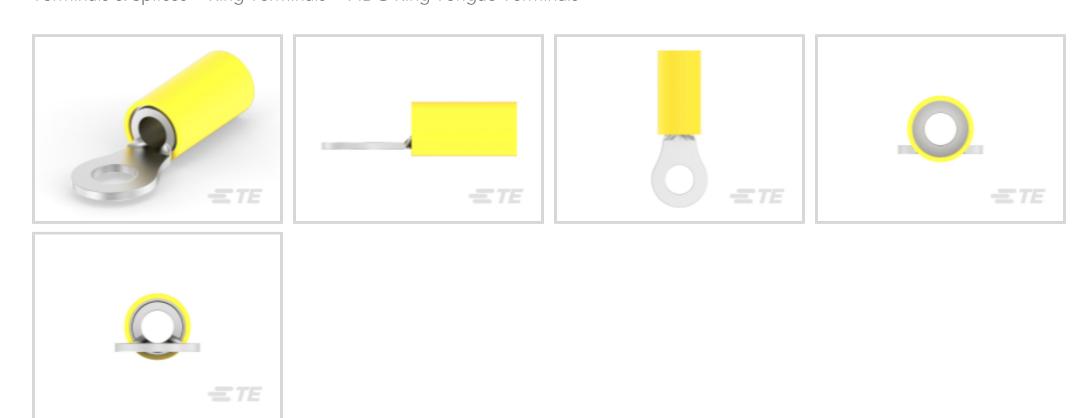

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: #10

All PIDG Ring Tongue Terminals (410)

Features

Configuration Features

Configuration realures	
Number of Holes	1
Body Features	
Product Weight	2.789 g
Mechanical Attachment	
Wire Insulation Support	With
Electrical Characteristics	
Voltage Rating	300 V
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	2500
Packaging Method	Tape Mounted

Product Type Features



Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#10
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Dimensions	
Wire Size	5180 – 13100 CMA
Stud Diameter	5 mm[.197 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	27.5 mm[1.08 in]
Compatible Insulation Diameter (Max)	6.35 mm[.25 in]
Compatible Insulation Diameter Range	3.81 – 6.35 mm[.15 – .25 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Other	
EU RoHS Compliance	Compliant

Product Compliance

EU ELV Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Compliant



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC
Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts













Also in the Series | PIDG

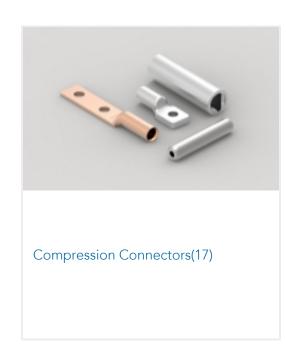


















Ring Terminals(588)

Spade Terminals(228)

Special Purpose Terminals(1)

Splices(41)

Customers Also Bought



TE Part #CAT-104MTA-NGPMR

Nylon Gold Plated Receptacle: 2.54

mm, with Mating Alignment, MTA 100



TE Part #350570-2 UMNL SOK 24-18 AUBR



TE Part #1-1600961-7
CONT 12-16 AWG PWR, MFBL PLATE



TE Part #2204091-1 HOUSING FOR BUSBAR-WIRE CONN.

TE Part #2204093-5 SHIPPING CON. FOR BUSBAR-WIRE CONN.

TE Part #2204093-6 SHIPPING CON. FOR BUSBAR-WIRE CONN.

Documents

Product Drawings

PIDG 12-10 R 10; TAPE

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-35109-1_V.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-35109-1_V.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-35109-1_V.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Closed Ring Tongue Terminal, 12 – 10 AWG, #10 Stud, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin Plating, Partially Insulated



Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English