


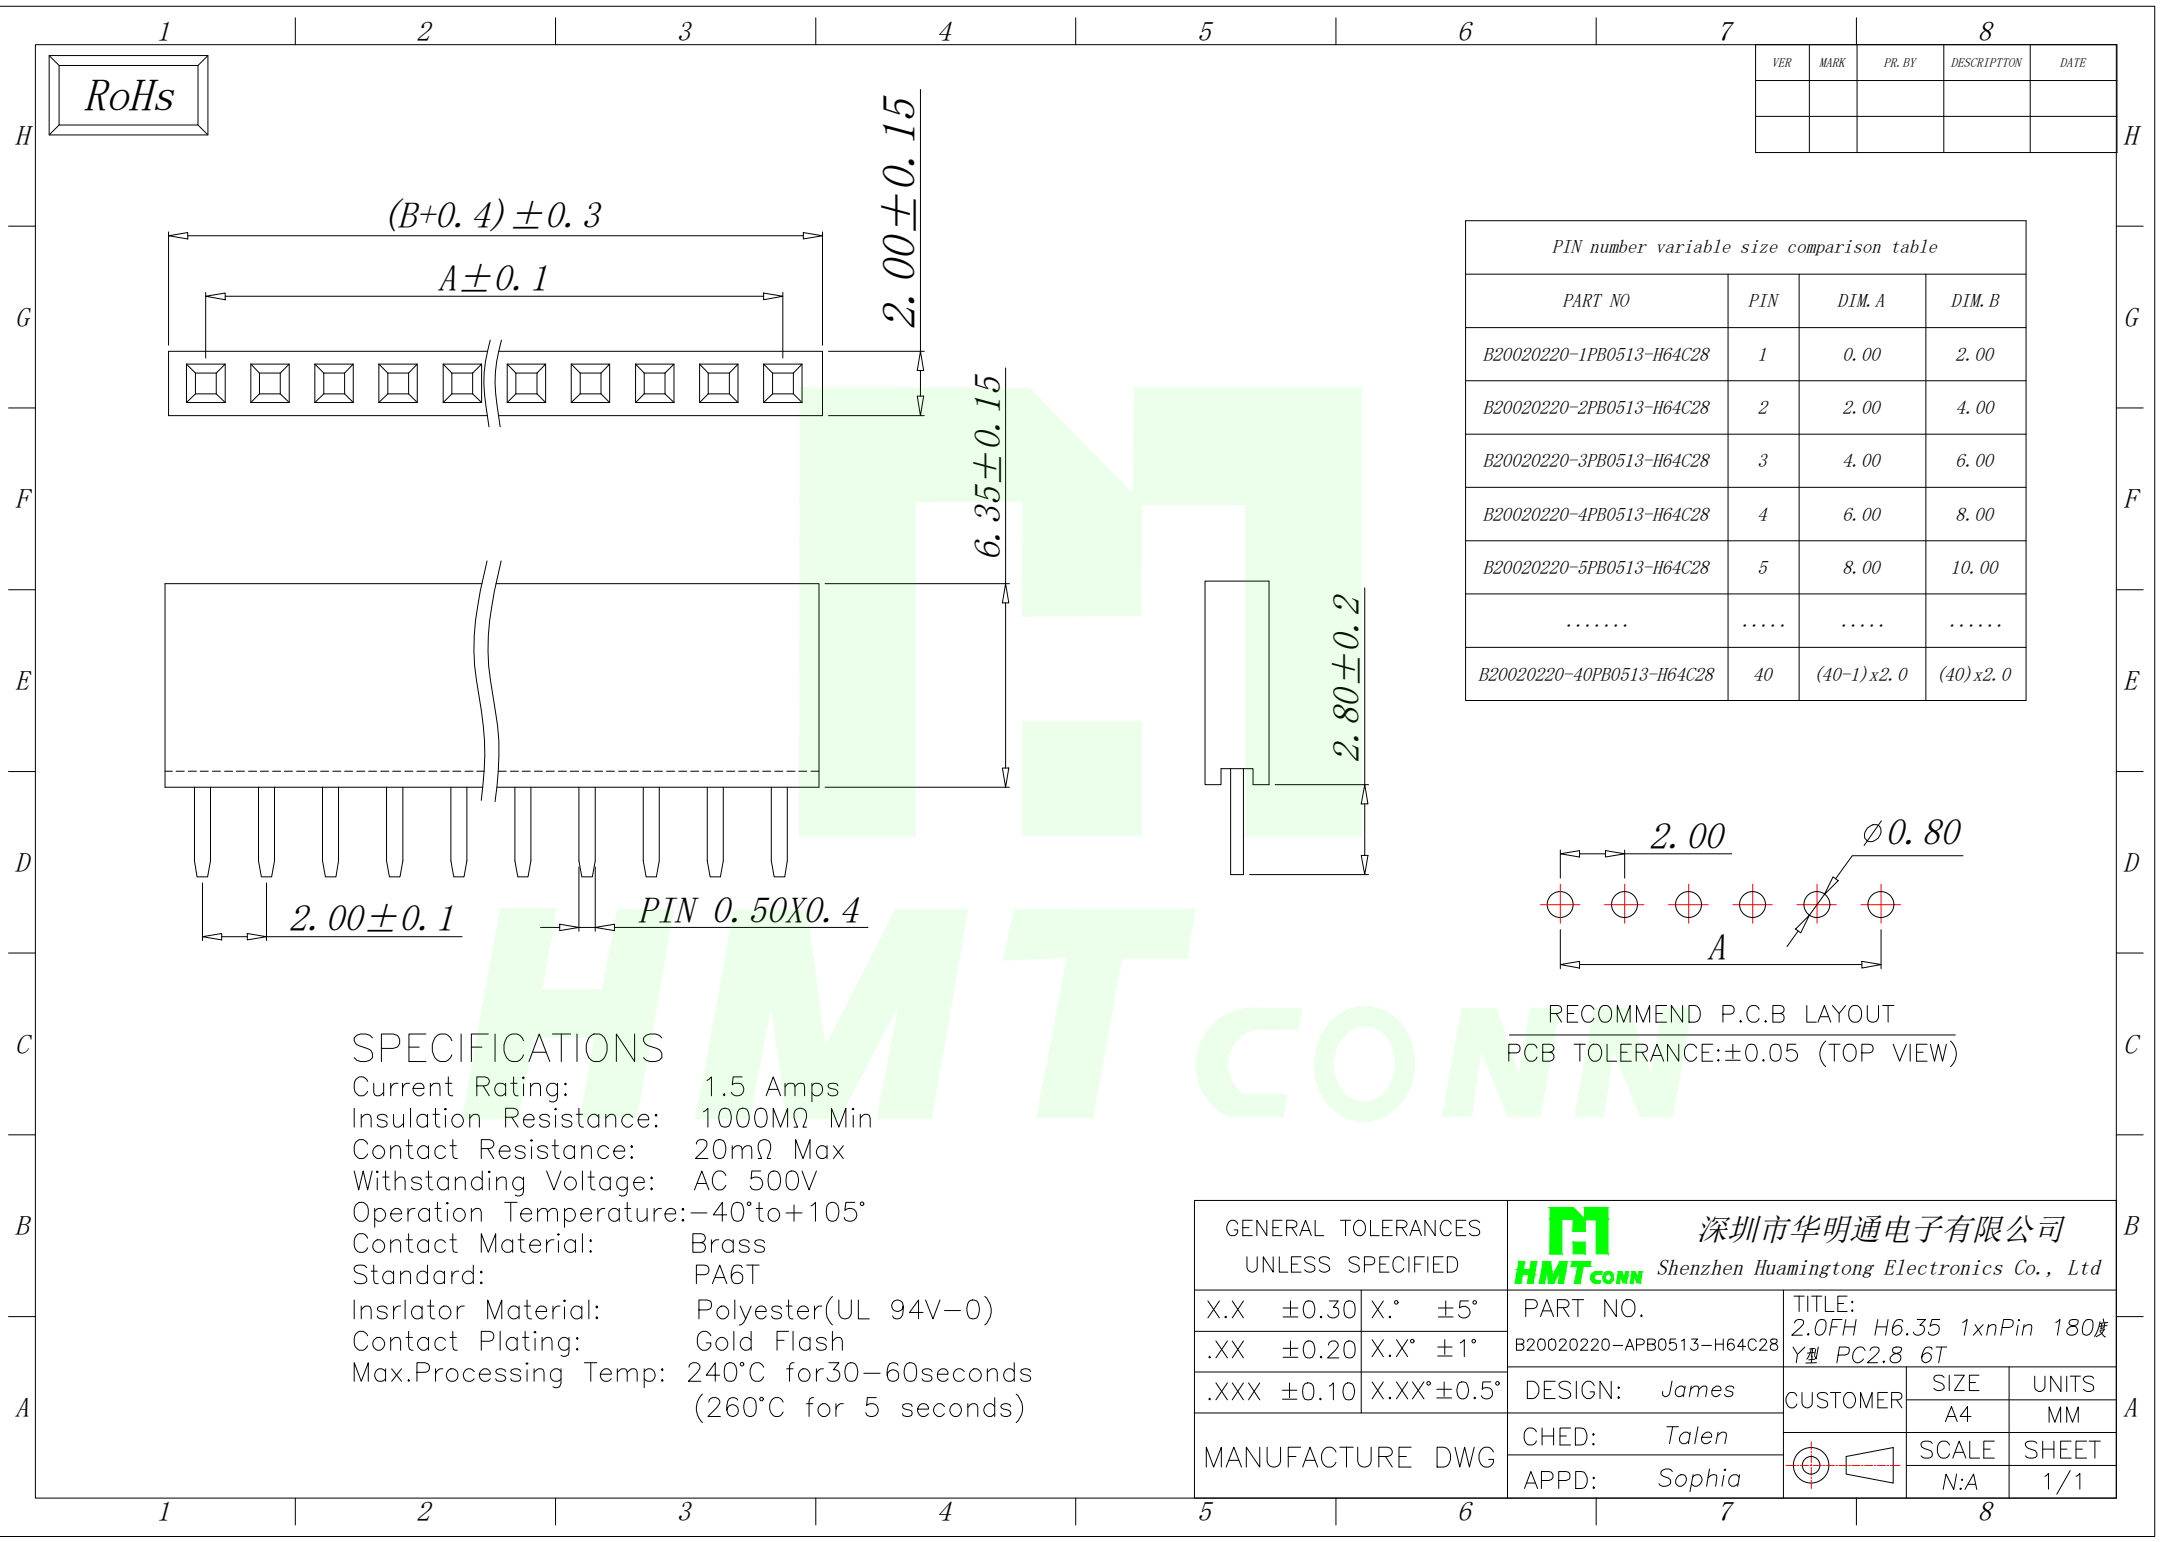


RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	DIM. A	DIM. B
B20020220-1PB0513-H64C28	1	0.00	2.00
B20020220-2PB0513-H64C28	2	2.00	4.00
B20020220-3PB0513-H64C28	3	4.00	6.00
B20020220-4PB0513-H64C28	4	6.00	8.00
B20020220-5PB0513-H64C28	5	8.00	10.00
.....			
B20020220-40PB0513-H64C28	40	(40-1)x2.0	(40)x2.0

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 500V
Operation Temperature: -40°to+105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for 5 seconds)

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 HMTCONN Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO.	TITLE:		
.XX ±0.20	X.X° ±1°	B20020220-APB0513-H64C28	2.0FH H6.35 1xnPin 180度		
.XXX ±0.10	X.XX° ±0.5°		Y型 PC2.8 6T		
MANUFACTURE DWG		DESIGN: James	CUSTOMER	SIZE	UNITS
				A4	MM
		CHED: Talen		SCALE	SHEET
		APPD: Sophia		N:A	1/1