


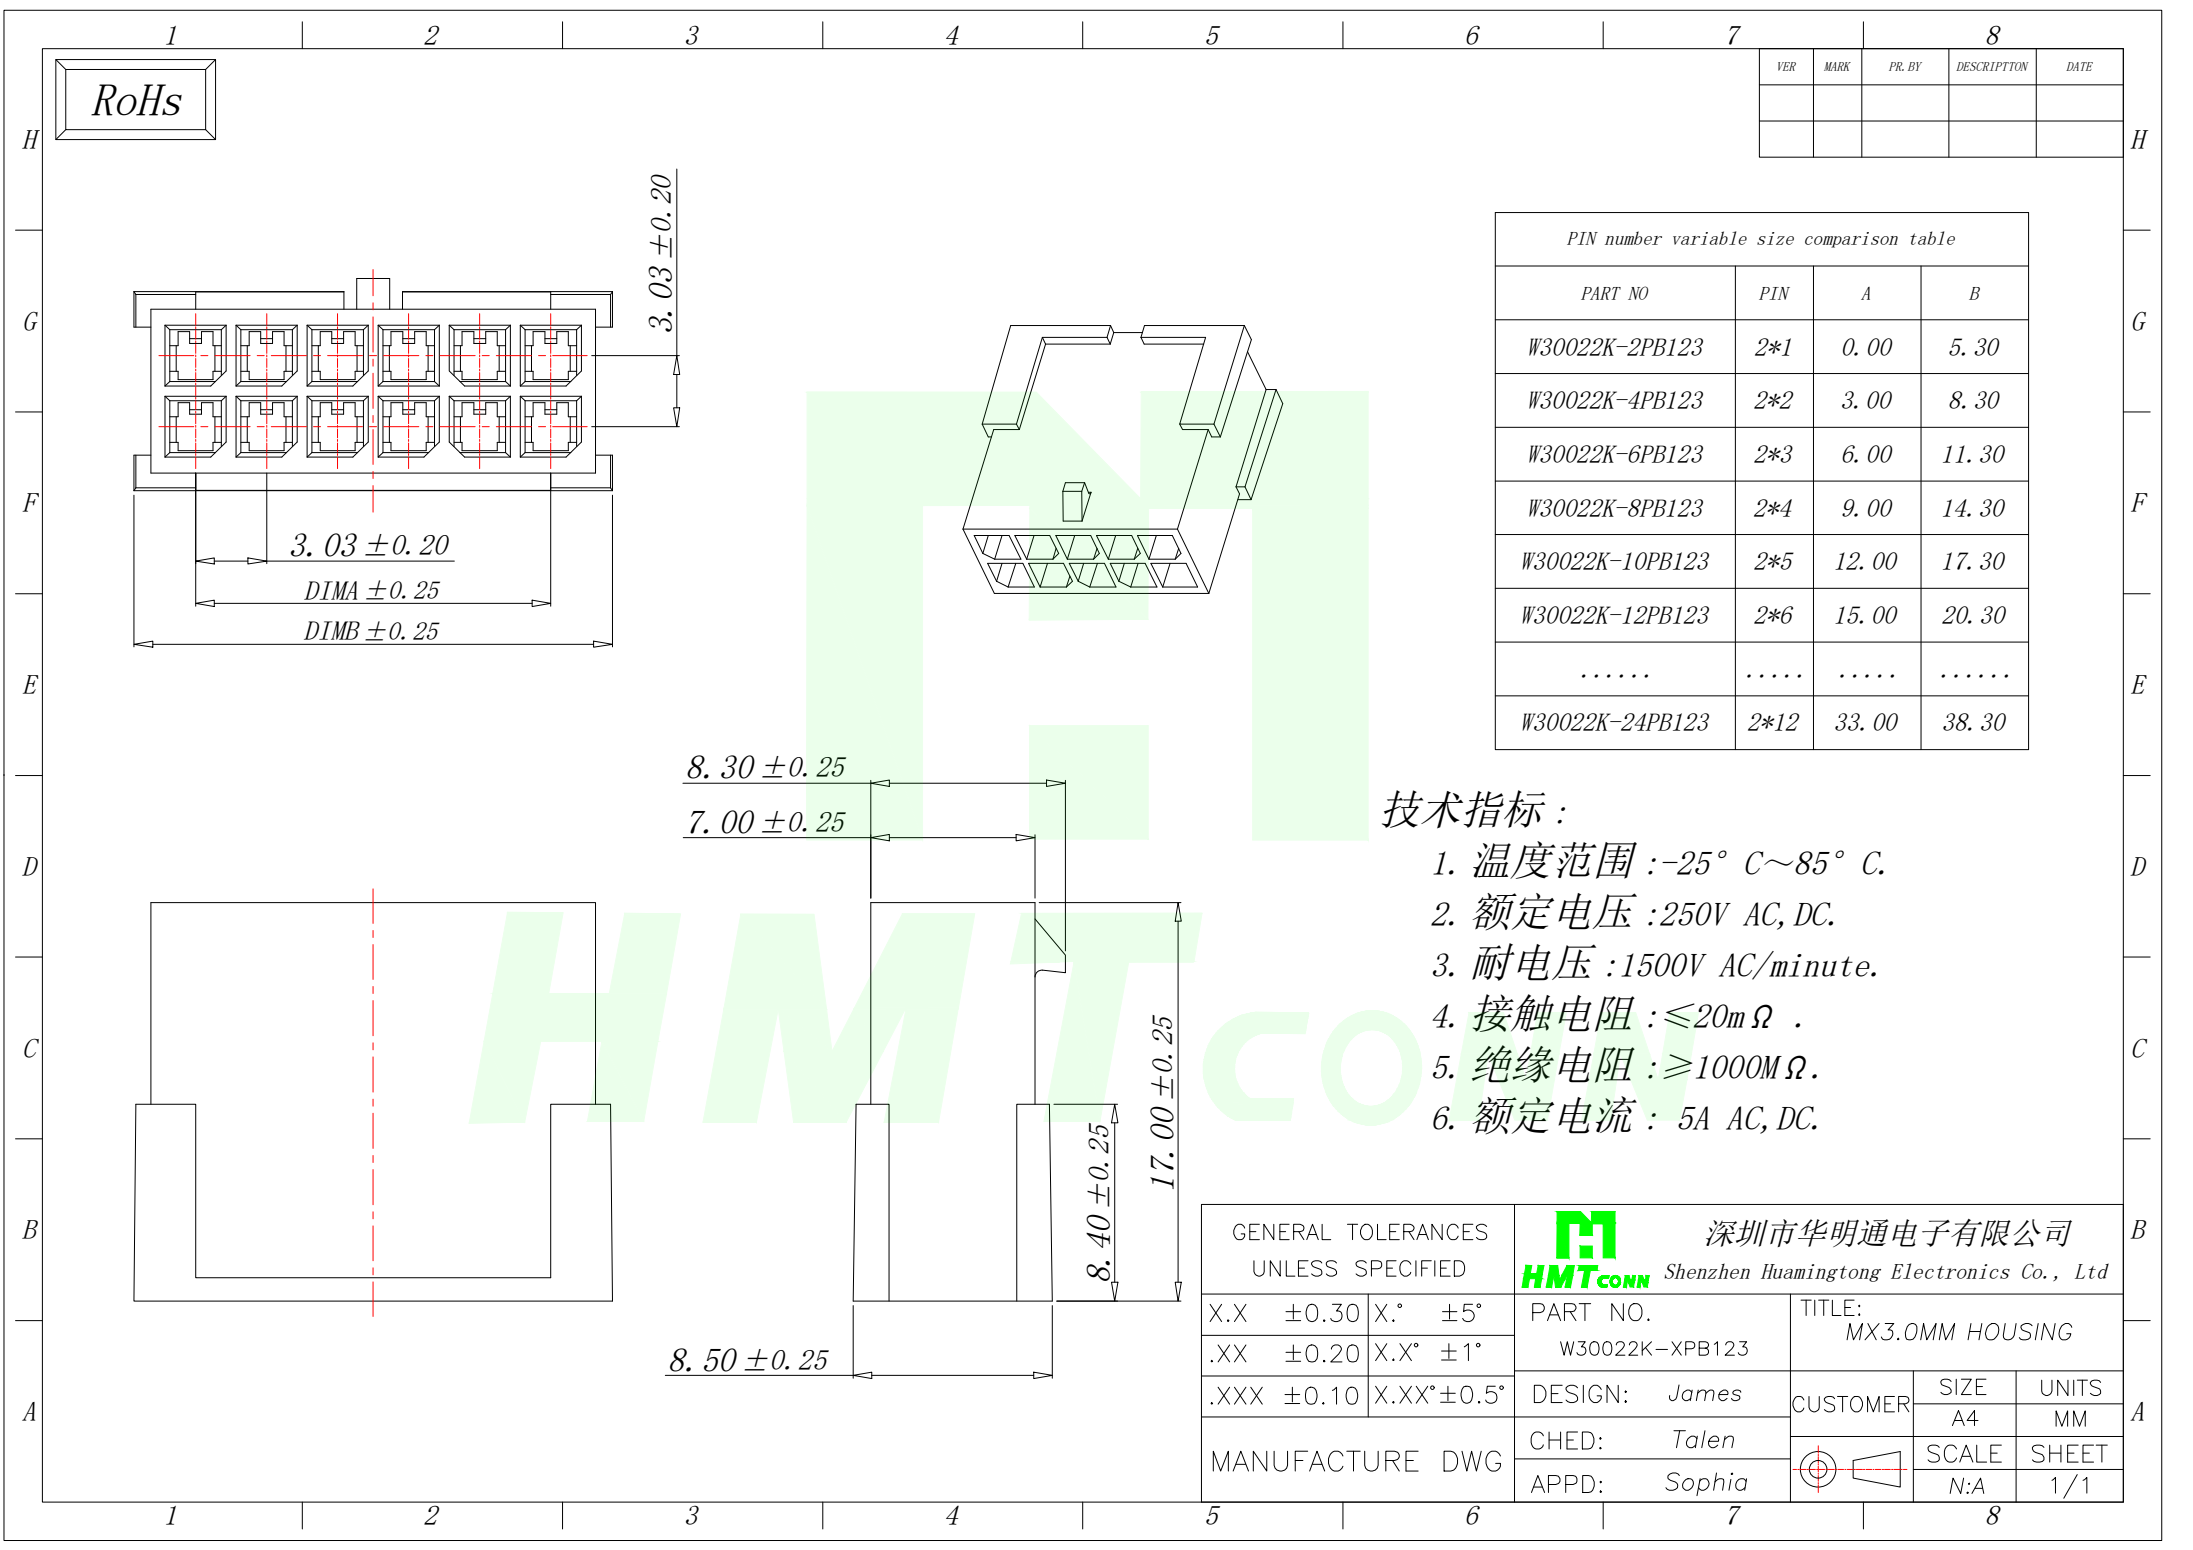


RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	A	B
W30022K-2PB123	2*1	0.00	5.30
W30022K-4PB123	2*2	3.00	8.30
W30022K-6PB123	2*3	6.00	11.30
W30022K-8PB123	2*4	9.00	14.30
W30022K-10PB123	2*5	12.00	17.30
W30022K-12PB123	2*6	15.00	20.30
.....			
W30022K-24PB123	2*12	33.00	38.30

- 技术指标：
- 1. 温度范围：-25° C~85° C.
 - 2. 额定电压：250V AC,DC.
 - 3. 耐电压：1500V AC/minute.
 - 4. 接触电阻：≤20mΩ .
 - 5. 绝缘电阻：≥1000MΩ.
 - 6. 额定电流：5A AC,DC.

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W30022K-XPB123	MX3.0MM HOUSING
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	SIZE
		APPD: Sophia	UNITS
			SCALE
			SHEET
			N:A 1/1