

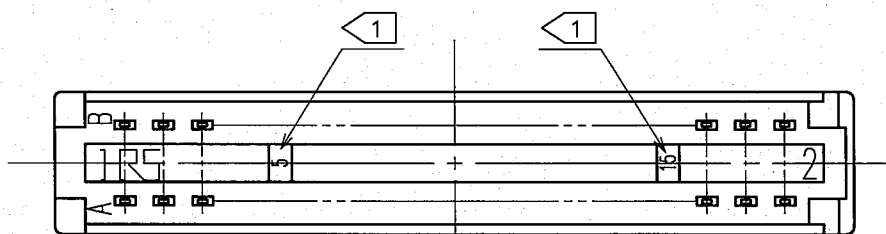
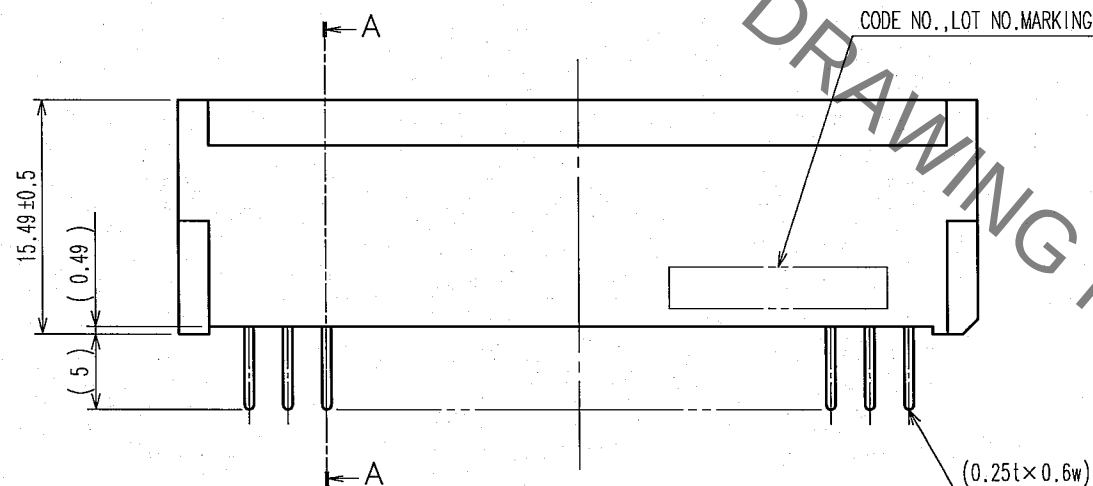


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


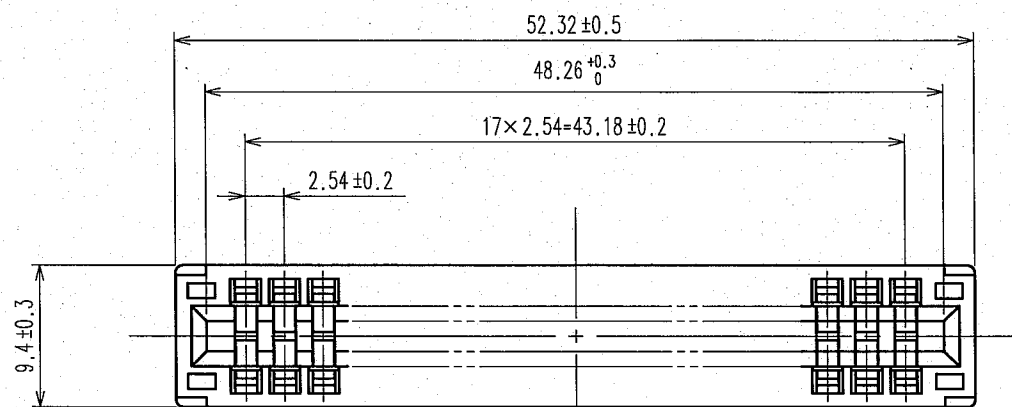


- NOTE 1 CONTACT NO.(5,10,15)
2 A POLARIZING KEY INSERTED BETWEEN THE FOLLOWING CONTACT POSITIONS.
(5 TO 6),(10 TO 11),(15 TO 16)

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

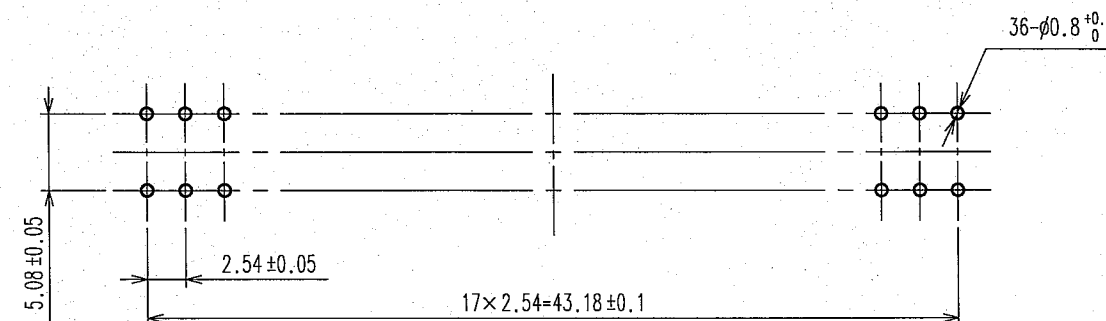

RECOMMENDED PC BOARD HOLE PATTERN(t=1.6±0.1)

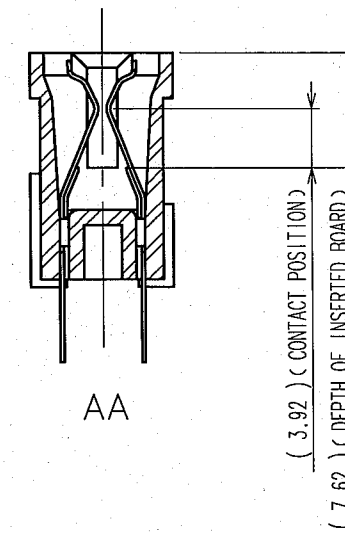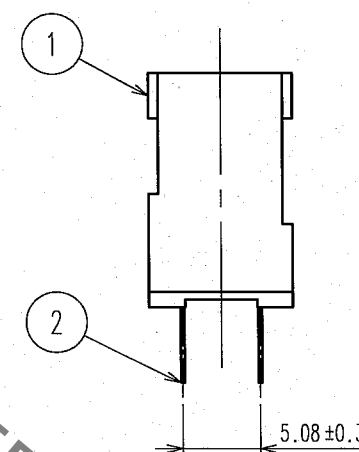

AA

2	PHOSPHOR BRONZE	CONTACT AREA: Ni2.5μm+Au0.03μm DIP AREA: Ni2.5μm+Sn2μm
1	PBT	BLACK UL94V-0
NO.	MATERIAL	FINISH, REMARKS

CODE NO.(OLD) CL	DRAWN H.Saitou 07.02.16	DESIGNED H.Saitou 07.02.16	CHECKED S. Tanaka 07.02.16	APPROVED K. Hayama 07.02.17	RELEASED ..
SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-019145-01 HRS HIROSE ELECTRIC CO., LTD	PART NO. CR22C-36D-2.54DS(70)	CODE NO. CL522-0072-0-70	1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[CR22C-36D-2.54DS\(70\)](#)