

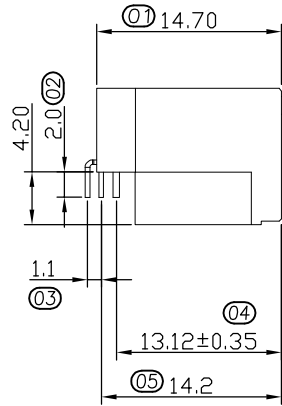


由Autodesk教育版产品制作

H




脚位尺寸以过孔规为准



LED Specification

Standard LED Color	LED Wavelength	Foward	Foward
Green	565nm	20mA	1.8-2.4V
Yellow	585nm	20mA	1.8-2.4V

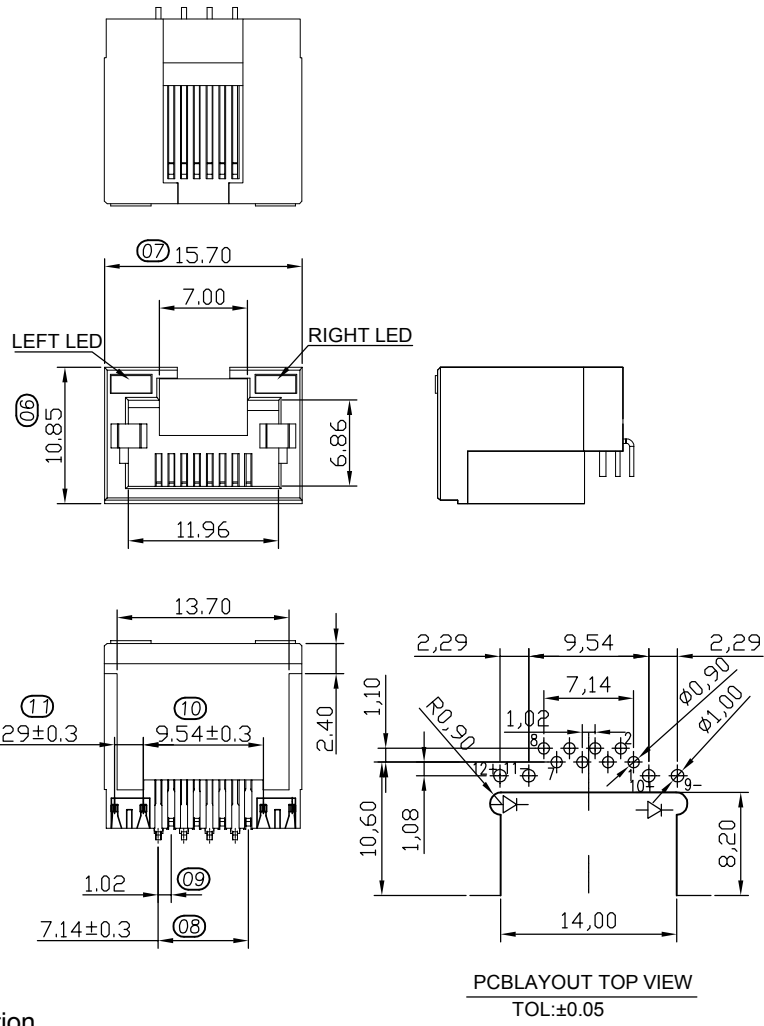

- NOTES:
- HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
 - CONTACT MATERIAL:PHOSPHOR BRONZE.
 - PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, WITH 40u" NICKEL PLATED.
 - LED:T=0.50, TIN PLATED.
- ELECTRICAL:
- VOLTAGE RATING: 125V AC RMS.
 - CURRENT RAING: 1.5AMP.
 - CONTACT RESISTANCE: 30MILLIOHMS MAX.
 - INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.
- MECHANICAL:
- DURRABILITY: 750 CYCLES MIN.
 - INSERTION FORCE : 22N MAX.
 - REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.
- ENVIRONMENTAL:
- STORAGE: -40°C~85°C
 - OPERATION: -40°C~85°C
 - REFLOW SOLDERING Temperature,255±5°C.
- *Apply to the EU standards(ROSH)
1. ①~⑰ FOR QIP DIM.

3004 - 0 02 - XX

系列码
RJ45沉板4.2

类别码
02:DIP全塑左黄右绿

流水码
03:GF LCP黑 盘装
04:GF LCP黑 卷装

				OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
				X. X	± 0.35	UNIT		MM				
				X. XX	± 0.25	SIZE	A4	DESIGN	赵文品2024. 11. 06	PART NO	RJ45-3004-002-03	
				X. XXX	± 0.05	SHEET	1/1	CHECK		TITLE	RJ45 沉板4.2 DIP全塑左黄右绿GF LCP黑	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	Angle	± 2°	PROJ.		APPROVE		Customer No.		
				DIM	TOL							