
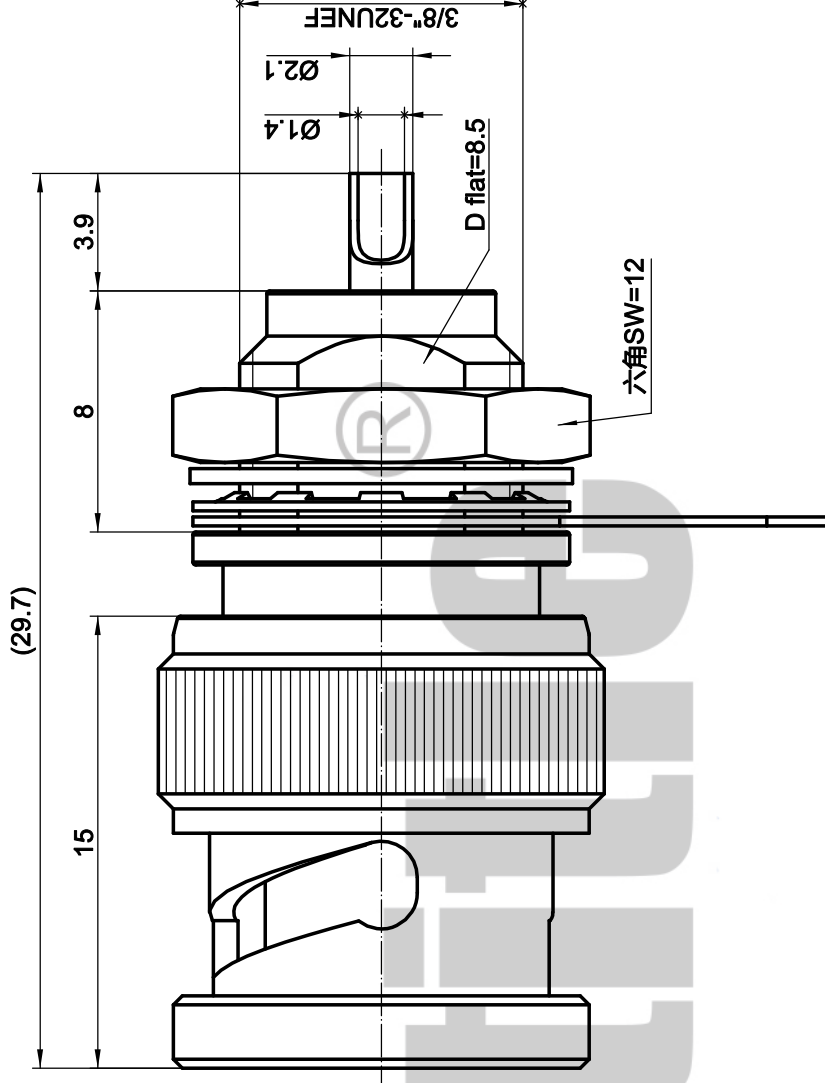


外 壳Body - 黄铜\Brass, 镀三元合金或镍\Tri-matel or Nickel plating
内导体\Contact - 黄铜\Brass, 镀金\Gold plating
绝缘体\Insulator - 聚四氟乙烯\Teflon, 本色\Natural
其 他Accessories - 铜材\copper, 镀三元合金或镍\Tri-matel or Nickel plating
密封圈\Gasket - 硅橡胶\Silicone rubber

2. 电气性能 Electrical:
- A. 特性阻抗 Impedance: 50 Ohm
 - B. 使用频率 Frequency range: DC-3GHz
 - C. 介质耐压 Breakdown voltage: 1500V rms
 - D. 绝缘电阻 Insulation resistance: 5000 MΩ
3. 机械性能 Mechanical:
- A. 使用寿命 Durability: 500 cycles



技术详询 139-7514-5315				版次	比例	4:1	料号	CT3.650.678
	设计	JAT	2024.01.05		第一角法		规格	BNC-JY-7
							名称	BNC公头后穿墙安装焊线
							entitle® 深圳成泰电子有限公司 www.cntitle.net	
							批准	DF
审核	DF	2024.01.05	1.未注公差按ISO2768-1(m) 2.去尽毛刺C0.13max 3.各圆同轴度Ø0.1max					