

HSF




AT2500F - 3.5/3.81 - XX - X - EF

Pitch:
3.5:3.5mm
3.81:3.81mm

Poles:
02: 2 Contacts
03: 3 Contacts
... ..
16: 16 Contacts

Insulator color:
A:Green
B:Blue
C:Black
G:Gray
O:Orange

EF:Series number

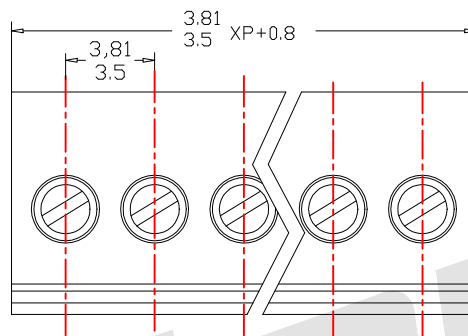

SPECIFICATION

Voltage Rating (额定电压): 125V

Current Rating (额定电流): 8A

Wire range(使用线径):
22—16AWG 1.5mm²


Housing(塑件):
PA66+23%GF, UL94V-0

Terminal(端子):
Phosphor Bronze, Nickel Plated(磷青铜, 镀镍)


Wire Cage(接触保护材料):
Brass.Nickel Plated(黄铜, 镀镍)

Screw(螺丝):
Steel, M2.0 Ni-Plated(钢, 镀锌)


Torque(扭力): 0.2N.m

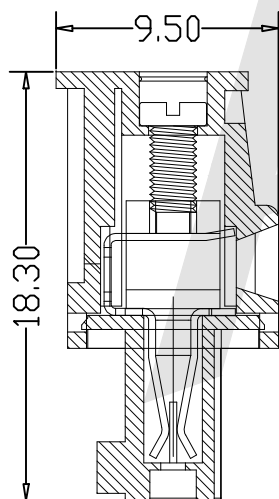

Type2:EF

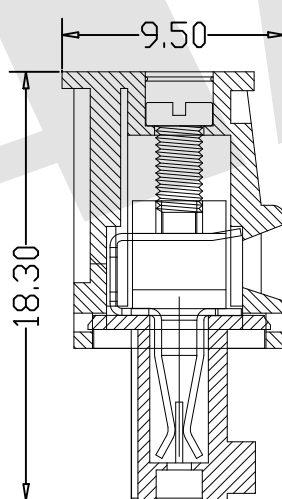

Type1:EFR

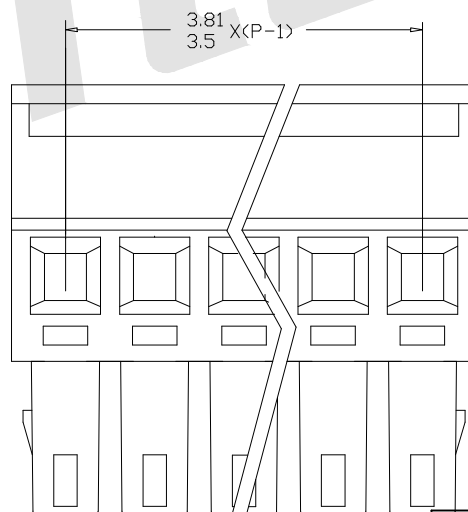

Unless Otherwise specified tolerance

X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown UNIT: mm

DRAW
Wu Sai DATE 22/03/2018

CHECK
BobYang DATE 22/03/2018



3rd ANGLE PROJECTION

Antenk ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Plug-in Terminal Block
Hook on back side Pitch:3.5/3.81

DRAWING NO: AT2500F-3.5/3.81XXX-EF

PRODUCT NO: AT2500F-3.5/3.81XXX-EF

REV

DESCRIPTION

DATE