



ZHEJIANG UNIU-NE Technology CO., LTD

浙江宇力微新能源科技有限公司



U1117 Data Sheet

V 1.1

版权归浙江宇力微新能源科技有限公司

Features

- Maximum output current is 1.1A
- Range of operation input voltage: Max 18V
- Line regulation: 0.03%/V (typ.)
- Standby current: 1.8mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: -20°C~85°C

Applications

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators For Switching Supplies

General Description

U 1117 is a series of low dropout three-terminal regulators with a dropout of 1.3V at 1A load current. U 1117 features a very low standby current 1.8mA compared to 5mA of competitor.


Other than a fixed version, $V_{out} = 3.3V, 5V$, U 1117 has an adjustable version, which can provide an output voltage from 3.3V to 5.0V with only

two external resistors.

U 1117 offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.


U 1117 is available in SOT89 power package.

Typical Application

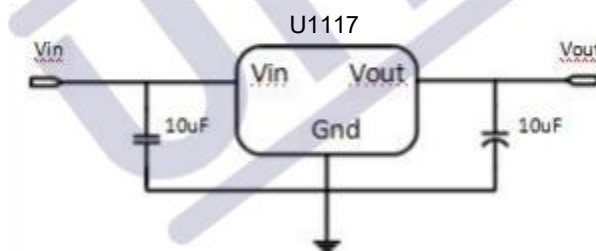

Application circuit of U 1117 fixed version

Typical Electrical Characteristic

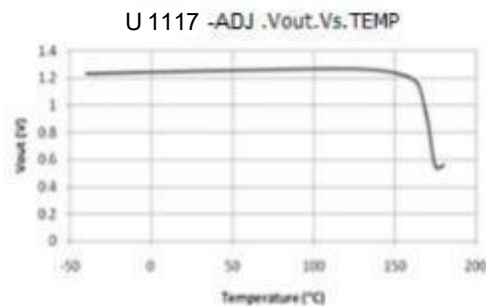

Ordering Information


Marking	Designator	Description
1117 XXXX XX	1117	Product code
	XX	Output Voltage 3.3V/5.0V
	XXXX	LOT

Note: "XX" stands for output voltages. "XX" stands for LOT.

Typical Application

U1117 has an adjustable version and six fixed versions (3.3V , 5V)


Fixed Output Voltage Version

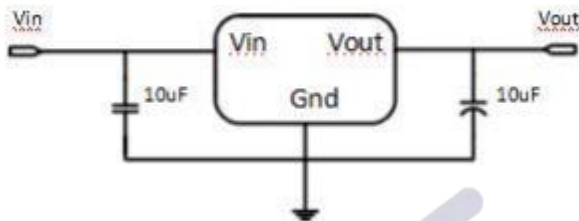

Application circuit of U1117 fixed version

- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.

Block Diagram

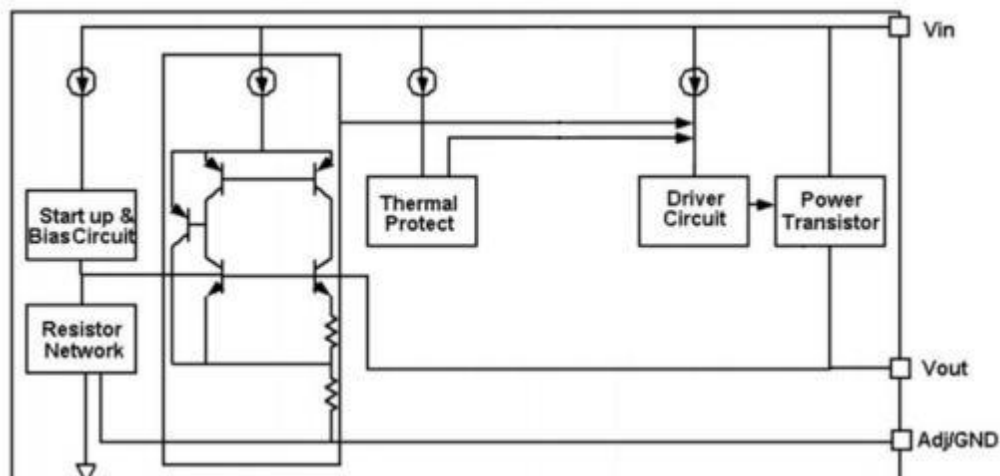

Pin Configuration

Absolute Maximum Ratings

Max Input Voltage.....	18V
Max Operating Junction Temperature(T_j).....	150°C
Ambient Temperature(T_a).....	-40°C~ 85°C
Storage Temperature(T_s).....	-40°C~150°C
Lead Temperature & Time.....	260°C 10S

Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

Electrical CharacteristicsT_A=25 °C, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{out}	Output voltage	U1117-3.3V 0≤I _{out} ≤1A, V _{in} =5.3V	3.234	3.3	3.366	V
		U1117-5.0V 0≤I _{out} ≤1A, V _{in} =7.0V	4.9	5	5.1	V
ΔV _{out}	Line regulation	U1117-3.3V I _{out} =10mA, 4.8V≤V _{in} ≤12V		0.03	0.2	%/V
		U1117-5.0V I _{out} =10mA, 6.5V≤V _{in} ≤12V		0.03	0.2	%/V
		U1117-3.3 V _{in} =4.8V, 10mA≤I _{out} ≤1A		6	24	mV
		U1117-5.0 V _{in} =6.5V, 10mA≤I _{out} ≤1A		9	36	mV
V _{drop}	Dropout voltage	I _{out} =100mA		1.15	1.3	V
		I _{out} =1A		1.3	1.5	V
I _q	Quiescent Current	U1117-3.3V, V _{in} =12V		1.8	5	mA
		U1117-5.0V, V _{in} =12V		1.8	5	mA

Note1: All test are conducted under ambient temperature 25°C and within a short period of time 20ms

Detailed Description

U1117 is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.


Typical Performance Characteristics

$T_A = 25^\circ\text{C}$, unless otherwise noted.


Line regulation

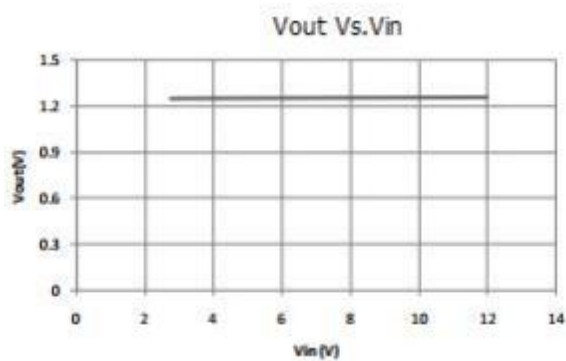


Dropout voltage

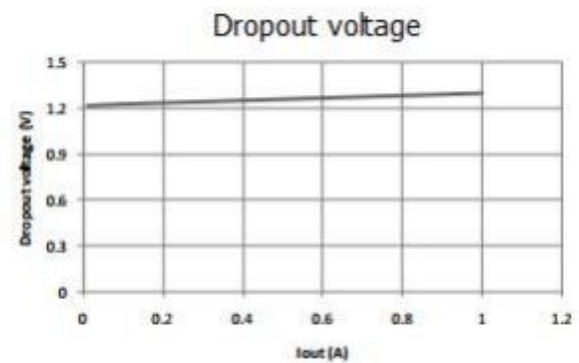

Load regulation

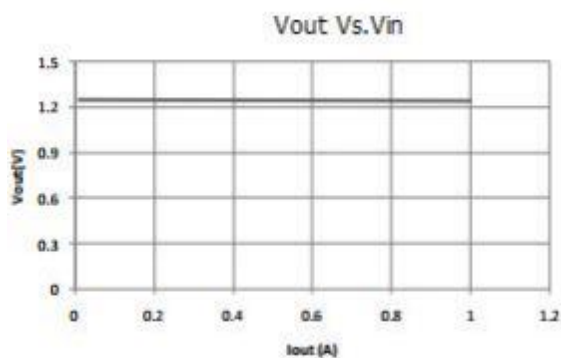


Thermal performance with OTP

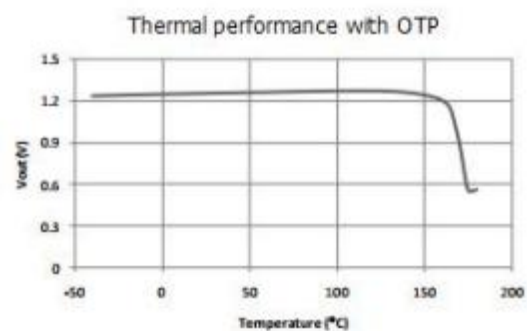

Package Information

SOT-223 PACKAGE OUTLINE DIMENSIONS

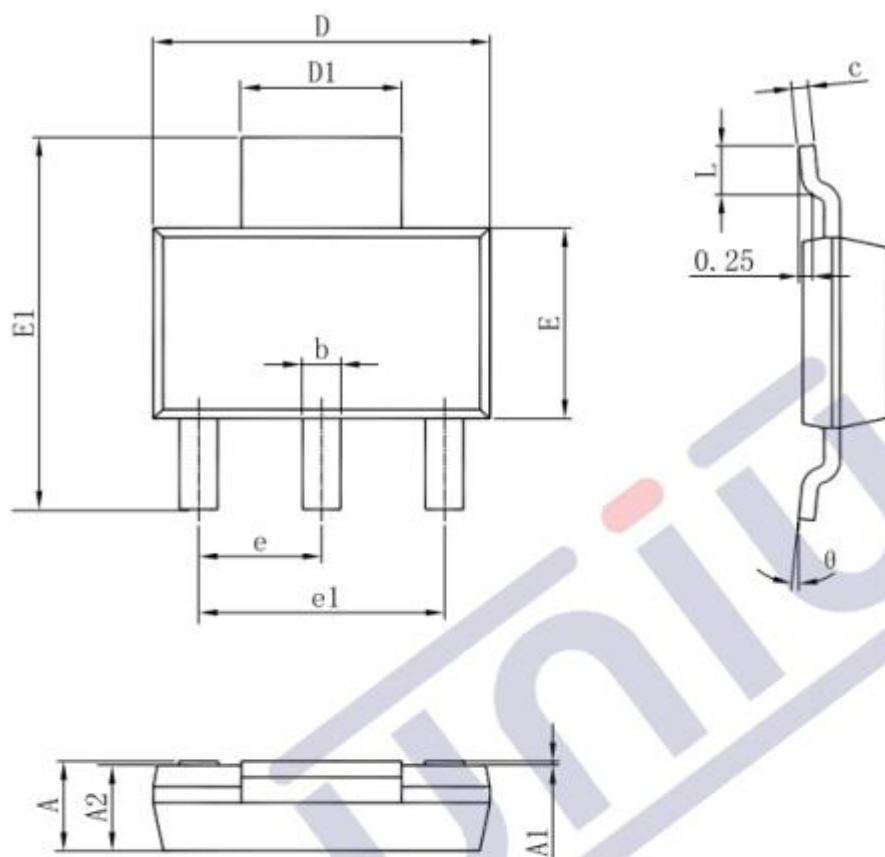

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

1.版本记录

DATE	REV.	DESCRIPTION
2018/04/19	1.0	First Release
2021/12/11	1.1	Layout adjustment

2.免责声明

浙江宇力微新能源科技有限公司保留对本文档的更改和解释权力，不另行通知！客户在下单前应获取我司最新版本资料，并验证相关信息是否最新和完整。量产方案需使用方自行验证并自担所有批量风险责任。未经我司授权，该文件不得私自复制和修改。产品不断提升，以追求高品质、稳定性强、可靠性高、环保、节能、高效为目标，我司将竭诚为客户提供性价比高的系统开发方案、技术支持等更优秀的服务。

版权所有 浙江宇力微新能源科技有限公司/绍兴宇力半导体有限公司

3.联系我们

浙江宇力微新能源科技有限公司

总部地址：绍兴市越城区斗门街道袍渎路25号中节能科创园45幢4/5楼

电话：0575-85087896（研发部）

传真：0575-88125157

E-mail: htw@uni-semic.com

无锡地址：无锡市新吴区纺城大道299号深港都会广场9-1401

电 话：0510-85297939

E-mail: zh@uni-semic.com

深圳地址：深圳市宝安区航城街道三围社区南昌路上合工业园B2栋501

电 话：0755-84510976

E-mail: htw@uni-semic.com