




REV NO.	DATE	REVISION	DR	CH	APP
△	24-07-29	DIN ISO-2768-1m tolerance applied	H.S LEE	K.N KIM	W.J LEE
		Re-dimension of drawings / Fix the code			

SPECIFICATION


- Rating : 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min at DC 250V
- Operating Force : 700gf·Cm Max
- Life cycle : 10,000 steps
- Packing : 50pcs Tube



P.C.B DIMENSION (Top View)






Real Coded							
	C	1	2	4	8		
13	●					13	
14	●	●				14	
15	●		●			15	
16	●	●	●			16	
1	●			●		1	
2	●	●		●		2	
3	●		●	●		3	
4	●	●	●	●		4	
5	●				●	5	
6	●	●			●	6	
7	●		●		●	7	
8	●	●	●		●	8	
9	●			●	●	9	
10	●	●		●	●	10	
11	●		●	●	●	11	
12	●	●	●	●	●	12	

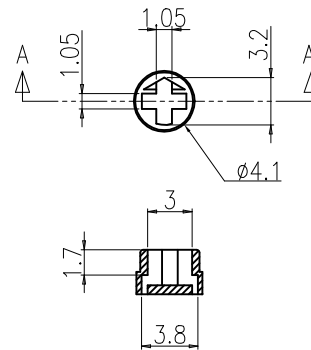

Section A-A'

ACTUATOR



DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE	ROTARY DIP SWITCH	
D.Y JUNG	W.J LEE	K.I LEE		0.3 			
2022-02-08	2022-02-08	2022-02-08	UNIT	SCALE	MODEL NO.	SER-16-1	REV.
			mm	N:S			
 SUNGMUN ELECTRONICS CO.,LTD			SIZE	DRAW NO.	SER-16-1-04	04	
			A4				

SUNGMUN ELECTRONICS CO.,LTD