


10	9		8		7		6	5	4	3	2	1
MAT'L NO	ENG NO	WIRE GAGE	INSUL MAT'L	INSUL COLOR	"ID" MIN	MWID	FITS MALE PLUG DIA.					
190380001	BRA-2156	22-18	PVC	RED	.062 (1.57)	.128 (3.25)	.156 (3.96)					
190380004	BRA-2180						.180 (4.57)					
190380037	BRA-2156N		NYLON	PINK			.156 (3.96)					
190380006	BRA-2180N						.180 (4.57)					
190380007	BRB-2156	16-14	PVC	BLUE	.085 (2.16)	.150 (3.81)	.156 (3.96)					
190380011	BRB-2180						.180 (4.57)					
190380009	BRB-2156N		NYLON	LT BLUE			.156 (3.96)					
190380013	BRB-2180N						.180 (4.57)					

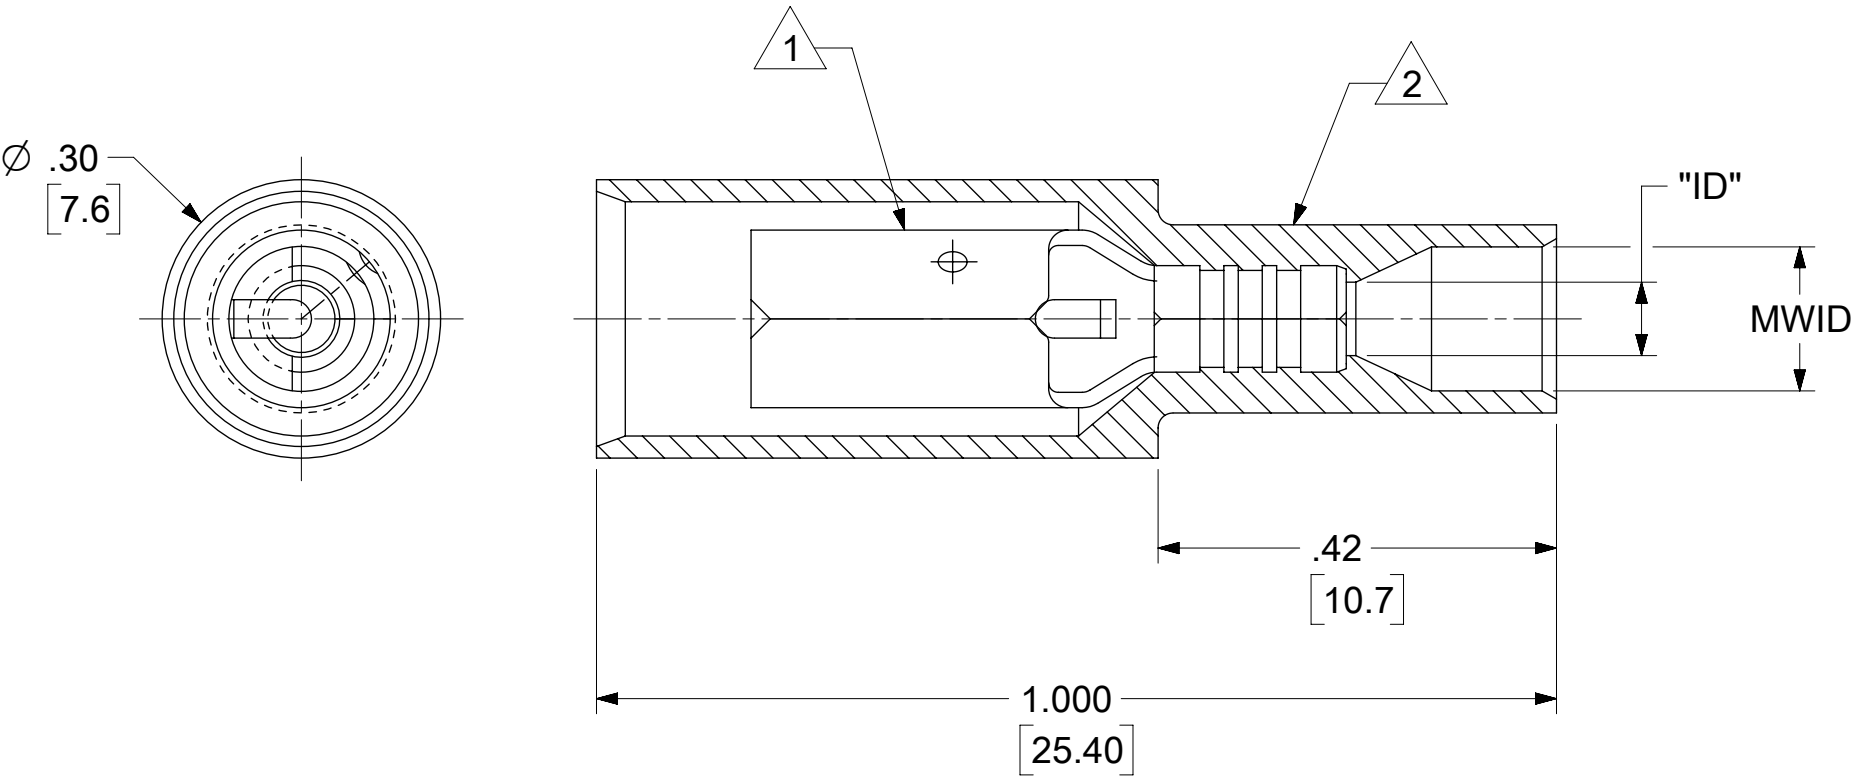

NOTES:

- 1 RECEPTACLE MATERIAL: TIN PLATED BRASS.
- 2 INSULATION MATERIAL: SEE CHART.
3. MWID = MAXIMUM WIRE INSULATION DIAMETER.
4. MUST BE RoHS COMPLIANT.

NOTES:

1

RECEPTACLE MATERIAL: TIN PLATED BRASS.

2

INSULATION MATERIAL: SEE CHART.

3. MWID = MAXIMUM WIRE INSULATION DIAMETER.

4. MUST BE RoHS COMPLIANT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: REDRAWN TO NX				molex FULLY INSULATED INSULK FEMALE BULLET RECEPTACLE						
	INCH/MM		5:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
			MM		INCH		EC NO: 799443 DRWN: DEANNM12024/09/30 CHK'D: ETHRODAHL2024/09/30 APPR: ETHRODAHL2024/09/30								
	4 PLACES		±		±										
	3 PLACES		±		± 0.005										
	DIVISIONAL SYMBOLS	2 PLACES		±	0.13	±	0.01	INITIAL REVISION: DRWN: DMYRICK2004/02/27 APPR: RDEROSS2004/03/01							
		1 PLACE		±	0.25	±									
		0 PLACES		±		±									
ANGULAR TOL		±	0.5 °	THIRD ANGLE PROJECTION											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS															
						DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						B-SIZE		19038				GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/30	20:10:45
-----------------	----	--------------	------------	----------

9	8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---	---