



1.尺寸(单位:mm)

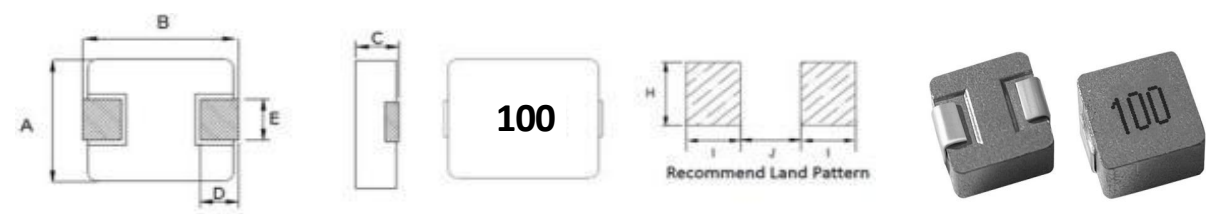

Series	A	B	C	D	E	I Typ	J Typ	H Typ
ZD1050	10.0±0.3	11.5Max	4.8±0.2	2.0±0.5	3.0±0.5	4.10	5.4	4.1
2. 产品编号	电感	DCR	饱和电流			温升电流		
	@100KHZ, 1V	Max.	Max	Typ.		Max	Typ.	
单位	μ	mΩ	A			A		
项目	L	DCR	Isat			Irms		
ZD1050-3R3M	3.3±20%	10.00	14.0	16.0		11.5	13.0	
ZD1050-4R7M	4.7±20%	14.00	13.2	15.0		9.7	11.0	
ZD1050-5R6M	5.6±20%	17.00	12.3	14.0		8.5	9.5	
ZD1050-6R8M	6.8±20%	18.50	12.3	14.0		8.0	9.0	
ZD1050-100M	10±20%	28.00	8.8	10.0		7.0	8.0	
ZD1050-150M	15±20%	42.00	6.5	7.5		5.7	6.5	
ZD1050-220M	22±20%	66.00	6.0	6.5		5.0	5.5	
ZD1050-330M	33±20%	86.00	4.6	5.2		4.2	4.8	
ZD1050-470M	47±20%	127.00	4.0	4.5		3.2	3.7	
ZD1050-680M	68±20%	185.00	2.8	3.2		2.4	2.7	
ZD1050-820M	82±20%	250.00	3.0	3.5		1.7	2.0	
ZD1050-101M	100±20%	290.00	2.5	2.8		1.8	2.1	

3.1. 包装尺寸 (单位: mm)

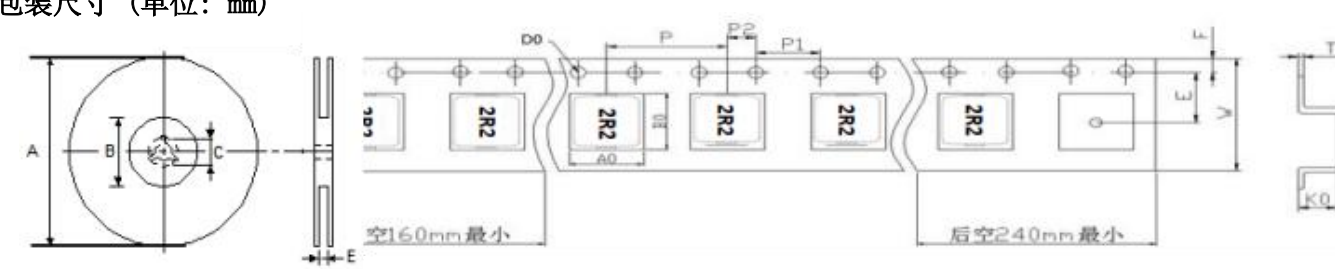

3.2 每卷包装数量:

规格系列	卷盘尺寸						
ZD1050	A	B		C		E	
	330±2.0	100+0.5/-0.2		13.4+0.3/-0.4		24.4+2.0/-0	
	载带尺寸						
	W	P	P0	K0	T	A0	B0
	24.0±0.3	16.0±0.1	4.0±0.1	5.4±0.1	0.40±0.05	10.5±0.1	11.5±0.1