

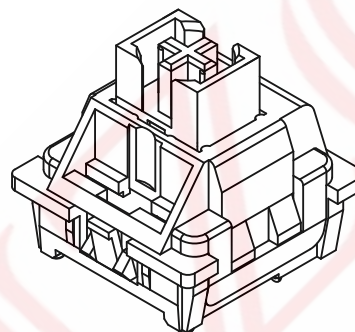
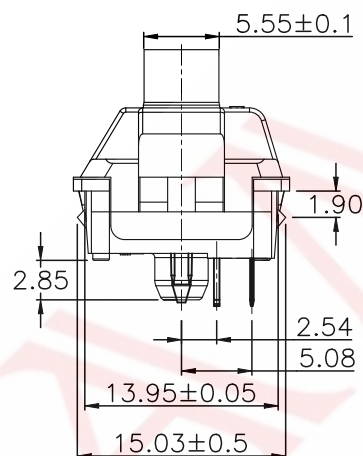


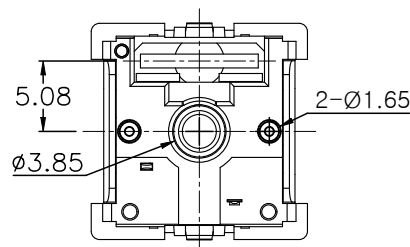

Voltage:	12 VAC/DC max	2 VDC min
Current:	10mA AC/DC max	10μA DC min
Insulation Resistance:	100MΩ at 100V(min)	
Initial Contact Resistance:	200mΩ max	
Bounce Time:	≤5msec	
Capacitance:	<2pF (at 1kHz)	
Operating Temperature:	-10°C to +70°C	
Storage Temperature:	-40°C to +70°C	
Flammability Rating:	UL94HB	
Solderability:	Wave solder, 5 seconds at 230±5°C	
Long life :	50,000,000 cycles	
Work Force:	40±10gf	
Total Travel:	3.50±0.2mm	
Pretravel:	2.00±0.6mm	
Choice of feel:	linear	
防尘防水等级:	N0（无）	

6	Spring	/	1PCS	Stainless Steel	/	UL94HB
5	Kone	/	1PCS	PA12	透明	
4	Housing	/	1PCS	PC	透明	UL94HB
3	Cover	/	1PCS	PC	透明	UL94HB
2	Contacts	/	2PCS	AGPDNI	PLATED GOLD	
1	Terminal	/	2PCS	COPPER	/	
序号	零件	编号	用量	材质	电镀/色	备注




Circuit Diagram

$$\begin{array}{ccccccc} \frac{28}{\textcircled{A}} & \frac{1}{\textcircled{B}} & \frac{151}{\textcircled{C}} & \frac{8}{\textcircled{D}} & \frac{1}{\textcircled{E}} & \frac{D}{\textcircled{F}} & \frac{M}{\textcircled{G}} \end{array}$$

A. 系列:28:键盘轴
B. 贴装方式:1-立插
C. 主体高度:151-15.1mm
D. 使用寿命:8-5000万次
E. 模具编码:1-C49
F. 物料要求:D-定制
G. 材质颜色:M-全透明

			GENERAL TOLERANCE	
			$\geq 0 \sim 2 <$	± 0.15
DESIGN	WANGGUIFA	2018.06.12	$\geq 2 \sim 5 <$	± 0.25
CHECKED	ZHENGJILIAN	2018.06.12	$\geq 0 \sim 2 <$	± 0.15
APPROVED	LILIANJIANG	2018.06.14	≥ 5	± 0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE: 全透明键盘轴H15.1MM-线性

DWG NO: 281151-PC049

PART NO: 2811513-CH496

MODEL NO: 28115181DM

NAME:	PUSH SWITCH
-------	-------------

SAMZO COMPONENTS
Electronic switch and connector manufacturer