

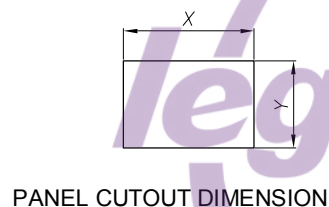
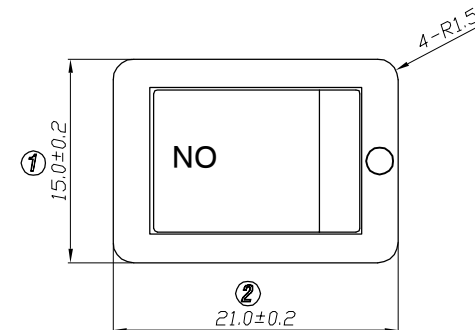

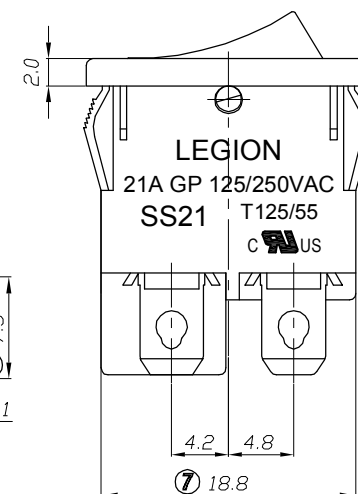


1. 电路 CIRCUIT: ON/OFF
2. 额定值 RATING: 21A GP 125/250VAC T125/55(C-UL)
16(6)A 250V~T125/55(ENEC17)
12(4)A 250V~T85/55(NEMKO;CQC;KC)
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘阻抗 INSULATION RESISTANCE: >100MΩ
(500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINTUTE
6. 柄的印字形式 ACTUATOR PRINTING: "ON"灰色 GRAY COLOR
7. 所有部件均使用环保材料
ALL MATERIALS USING MEET THE RoHS DIRECTIVE

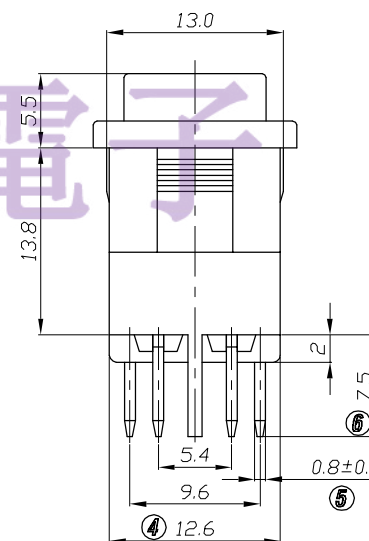

PANEL CUTOUT DIMENSION

PANEL THICKNESS	X	Y
0.75~1.25mm	19.2 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm
1.25~2.0mm	19.4 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm
2.0~3.0mm	19.8 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm

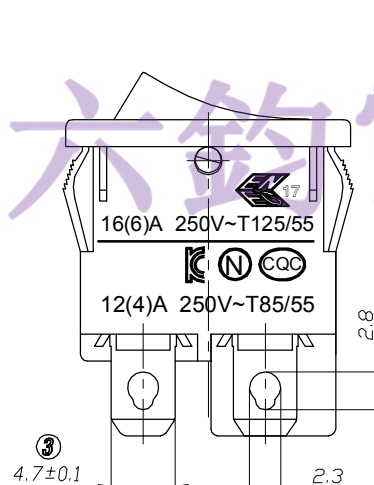

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				LMC	SCALE	NO		
3	→	8	→	X	±0.30				2020.12.04	MAT'L	***		
2	→	7	→	X.X	±0.20					MATERIAL NO.			
1	→	6	→	X.XX	±0.10							DRAWING NO.	REV.
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				SS21-WW15EG-B(W1)		WIF120109	A0