



SK3020R

Band2, RF-Rx SAW Filter
Revision 0 : April 2016

MSL 3 Device



- ☐ Electrical Characteristics
 - ☐ Package Dimensions
 - ☐ Testing Environment
 - ☐ Frequency Characteristics
-

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+90
Storage Temperature Range	°C	-40	-	+90
Maximum DC Voltage	V	-	-	-
Maximum Input Power	dBm	-	-	10
Source Impedance (Unbalanced)	Ω	-	50	-
Load Impedance (Unbalanced)	Ω	-	50//4.7nH	-
Package type & size	C14			
Length x Width	mm ²	-	1.1 x 0.9	-
Height	mm	-	-	0.55
ESD	HBM:1A(499V) MM:M1(100V)			

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	1960.0	-
Insertion Loss within 1930.0 ~ 1990.0 MHz	dB	-	2.3	4.0
Amplitude Ripple within 1930.0 ~ 1990.0 MHz	dB _{p-p}	-	1.0	2.7
Input VSWR within 1930.0 ~ 1990.0 MHz	-	-	1.9	2.3
Output VSWR within 1930.0 ~ 1990.0 MHz	-	-	1.8	2.3
D.C ~ 960.0 MHz	dB	38	41	-
1558.0 ~ 1608.0 MHz	dB	35	36	-
1710.0 ~ 1850.0 MHz	dB	35	37	-
1850.0 ~ 1910.0 MHz	dB	32	39	-
2020.0 ~ 2070.0 MHz	dB	7	27	-
2070.0 ~ 2400.0 MHz	dB	25	33	-
2400.0 ~ 2500.0 MHz	dB	33	39	-
2500.0 ~ 3780.0 MHz	dB	28	37	-
3780.0 ~ 3980.0 MHz	dB	30	40	-
3980.0 ~ 5790.0 MHz	dB	21	34	-
5790.0 ~ 5970.0 MHz	dB	21	34	-
5970.0 ~ 7720.0 MHz	dB	21	23	-
7720.0 ~ 7960.0 MHz	dB	17	23	-
7960.0 ~ 8000.0 MHz	dB	17	23	-

Notes : (1) With Matching Network .


□ Package Dimensions

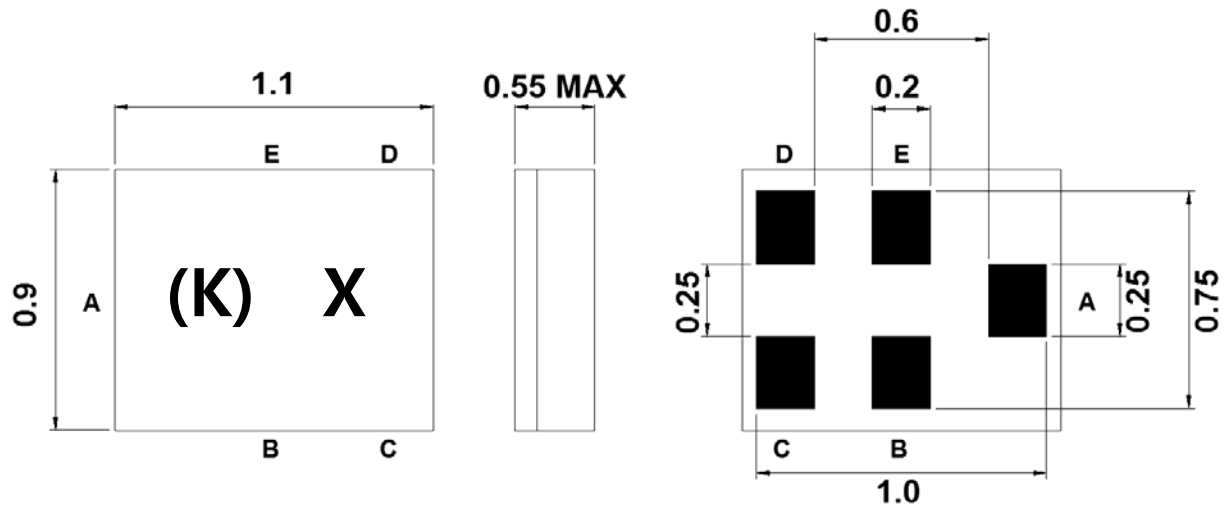

Marking Descriptions	
(K)	Series Number
X	Date Code(Year+Month)

Pin Description	
B,C,E	Ground
A	Input
D	Output


□ Testing Environment

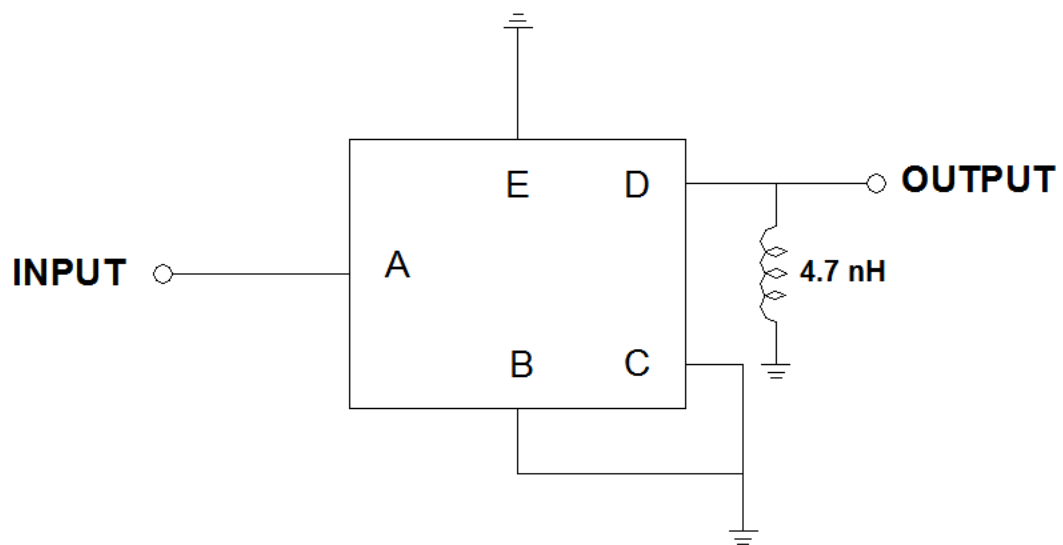


Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

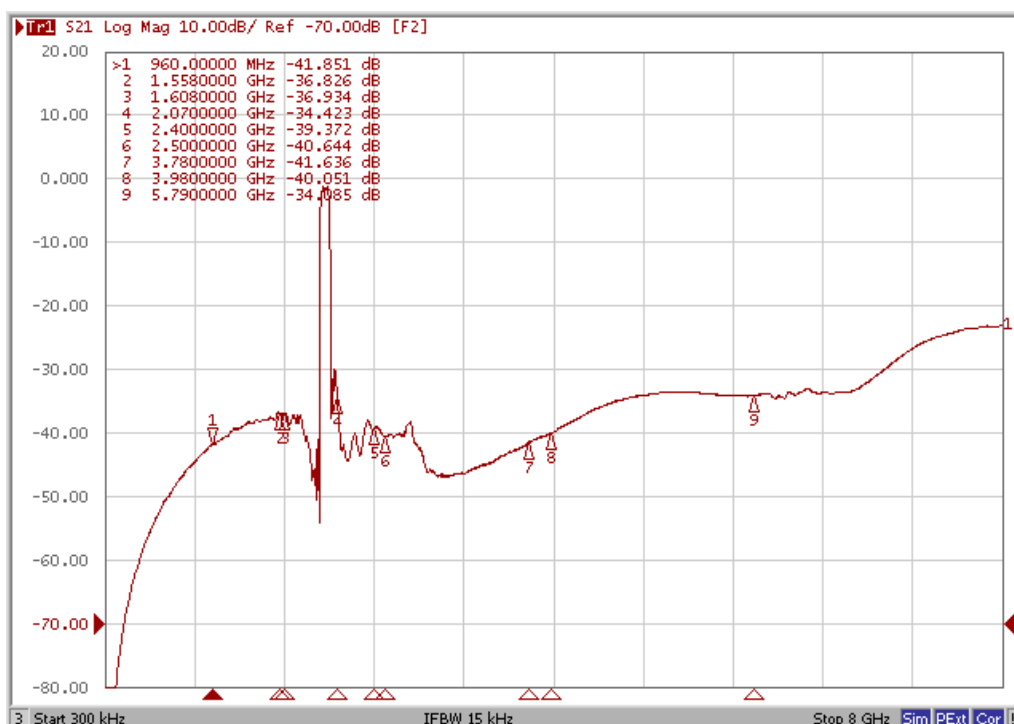

VSWR

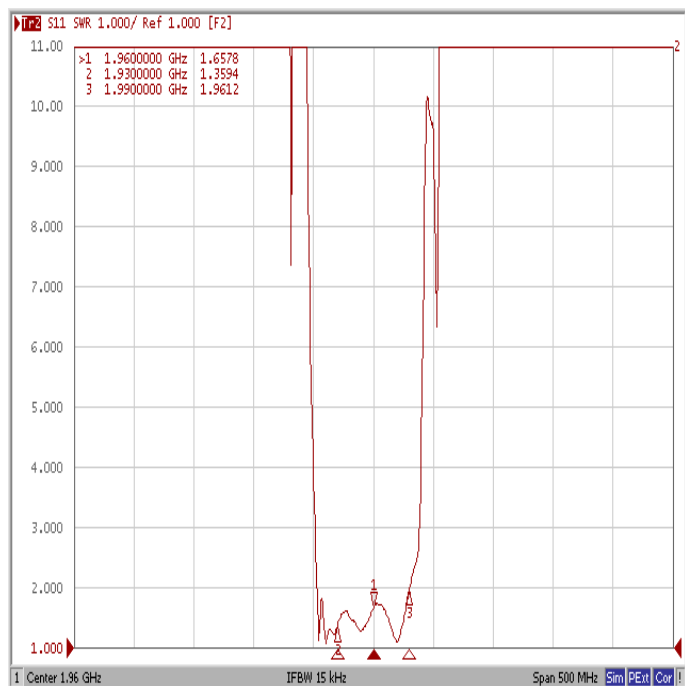

Smith Chart

