

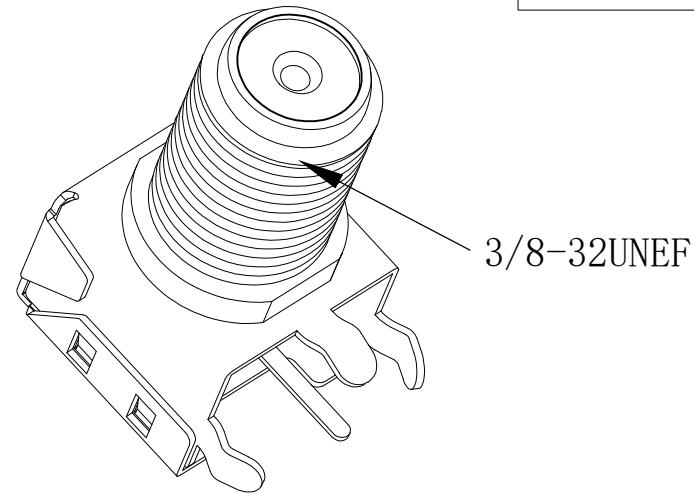
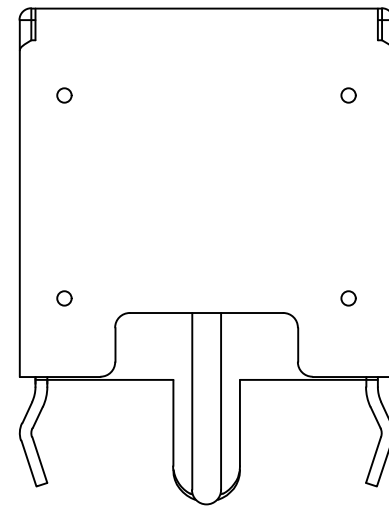
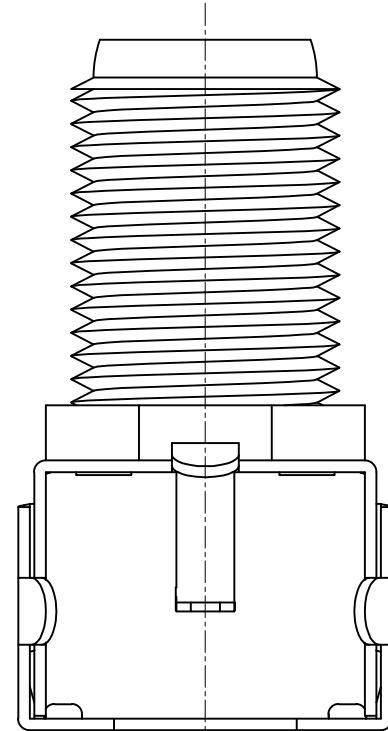
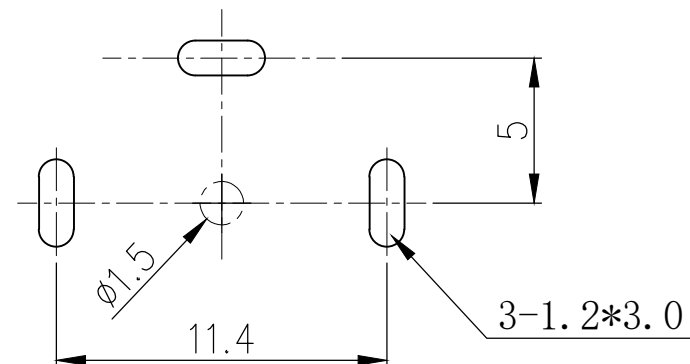


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

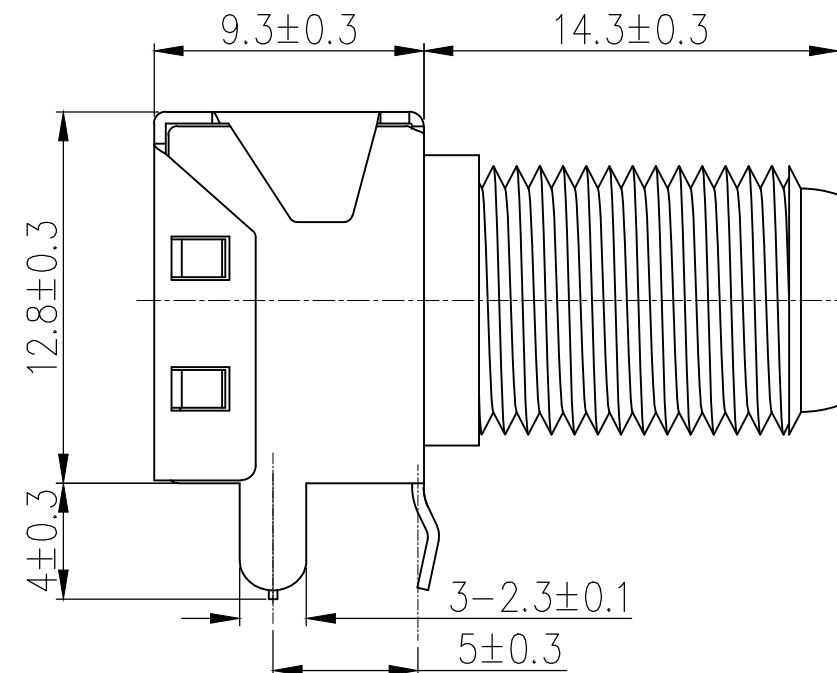


SPECIFICATION (技术要求)

1. Operating Temperature(环境温度): $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
2. Voltage Rating(额定电压): 50V AC/DC
3. Current Rating(额定电流): 0.5A
4. Contact Resistance(接触抗阻): $30\text{m}\Omega$
5. Insulation Resistance(绝缘抗阻): $100\text{M}\Omega$
6. Dielectric Withstanding Voltage(耐电压): 500V AC Min
7. Insertion/Withdrawal Force(插拔力): 3-50N
8. Life Time(mating cycles)寿命: >1000 Cycles
10. SIGNAL LOSS $<1\text{dB}$ IN BOTH VHF, UHF BAND.
11. NOMINAL IMPEDANCE : 75 OHMS.
12. OPERATING FREQUENCY : 0-2 GHZ.

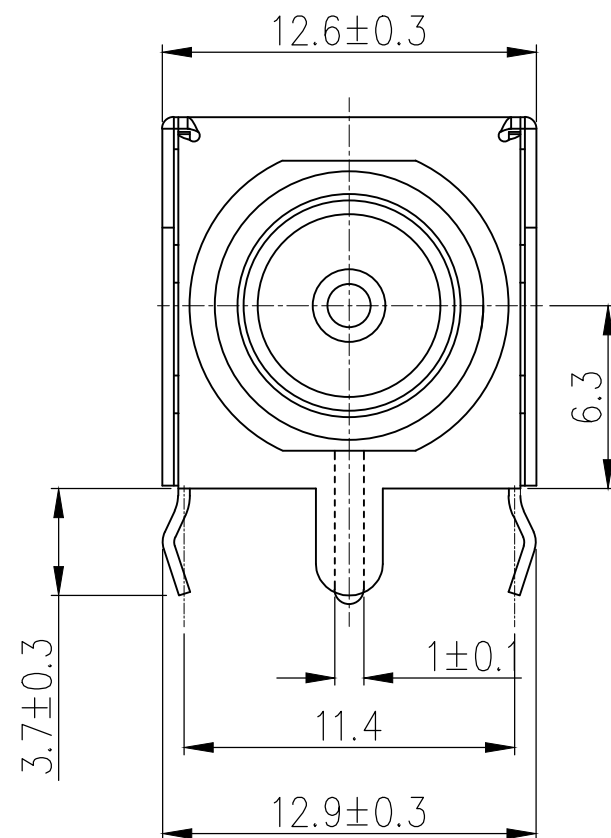

Recommend PCB Layout
Tolerance: $\pm 0.05\text{mm}$

3	F头	锌合金	镀镍	
2	支架	马口铁	CnSn	
1	绝缘体	PA66	棕色	
序 号	品 名	材 质	电镀/颜色	备 注

 深圳市虹成电子有限公司		品 名 TITLE	屏蔽罩	
		料 号 PART NO	HC-PBZ-R03563	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1	
. XX $\pm$ 0.20 X $\pm$ 0.40		单 位 UNIT	MM	制 图 DRAW
. X $\pm$ 0.30 ANGULAR: $\pm 2^{\circ}$		张 数 PART NO	1 OF 1	审 核 CHECKED
		版 本 REV	A	批 准 APPROVE
				夏操云
				赵亮亮

