
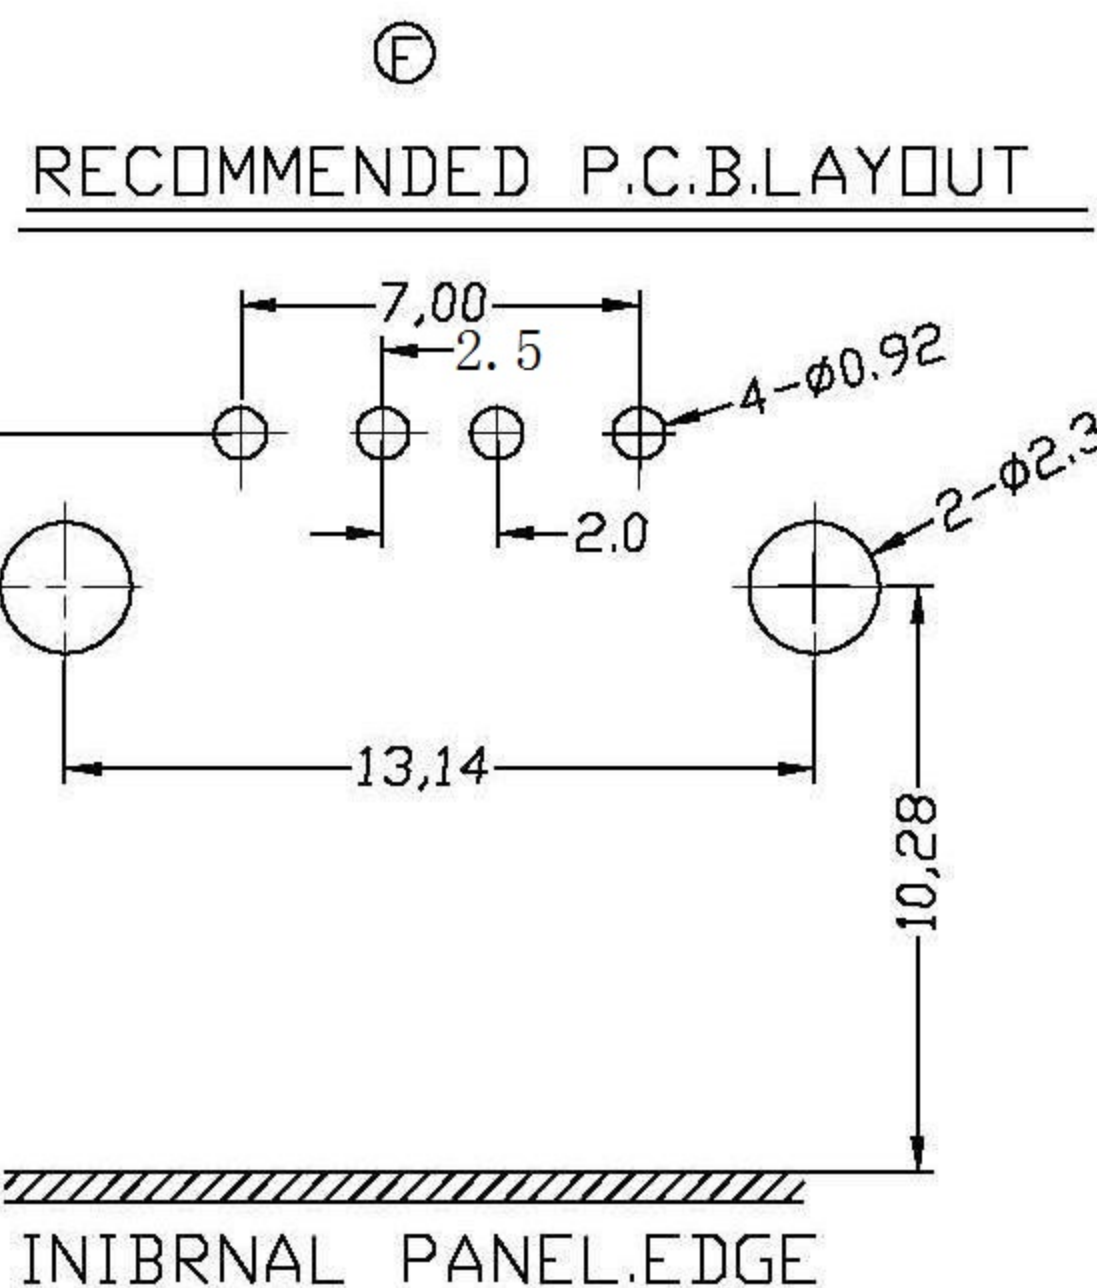
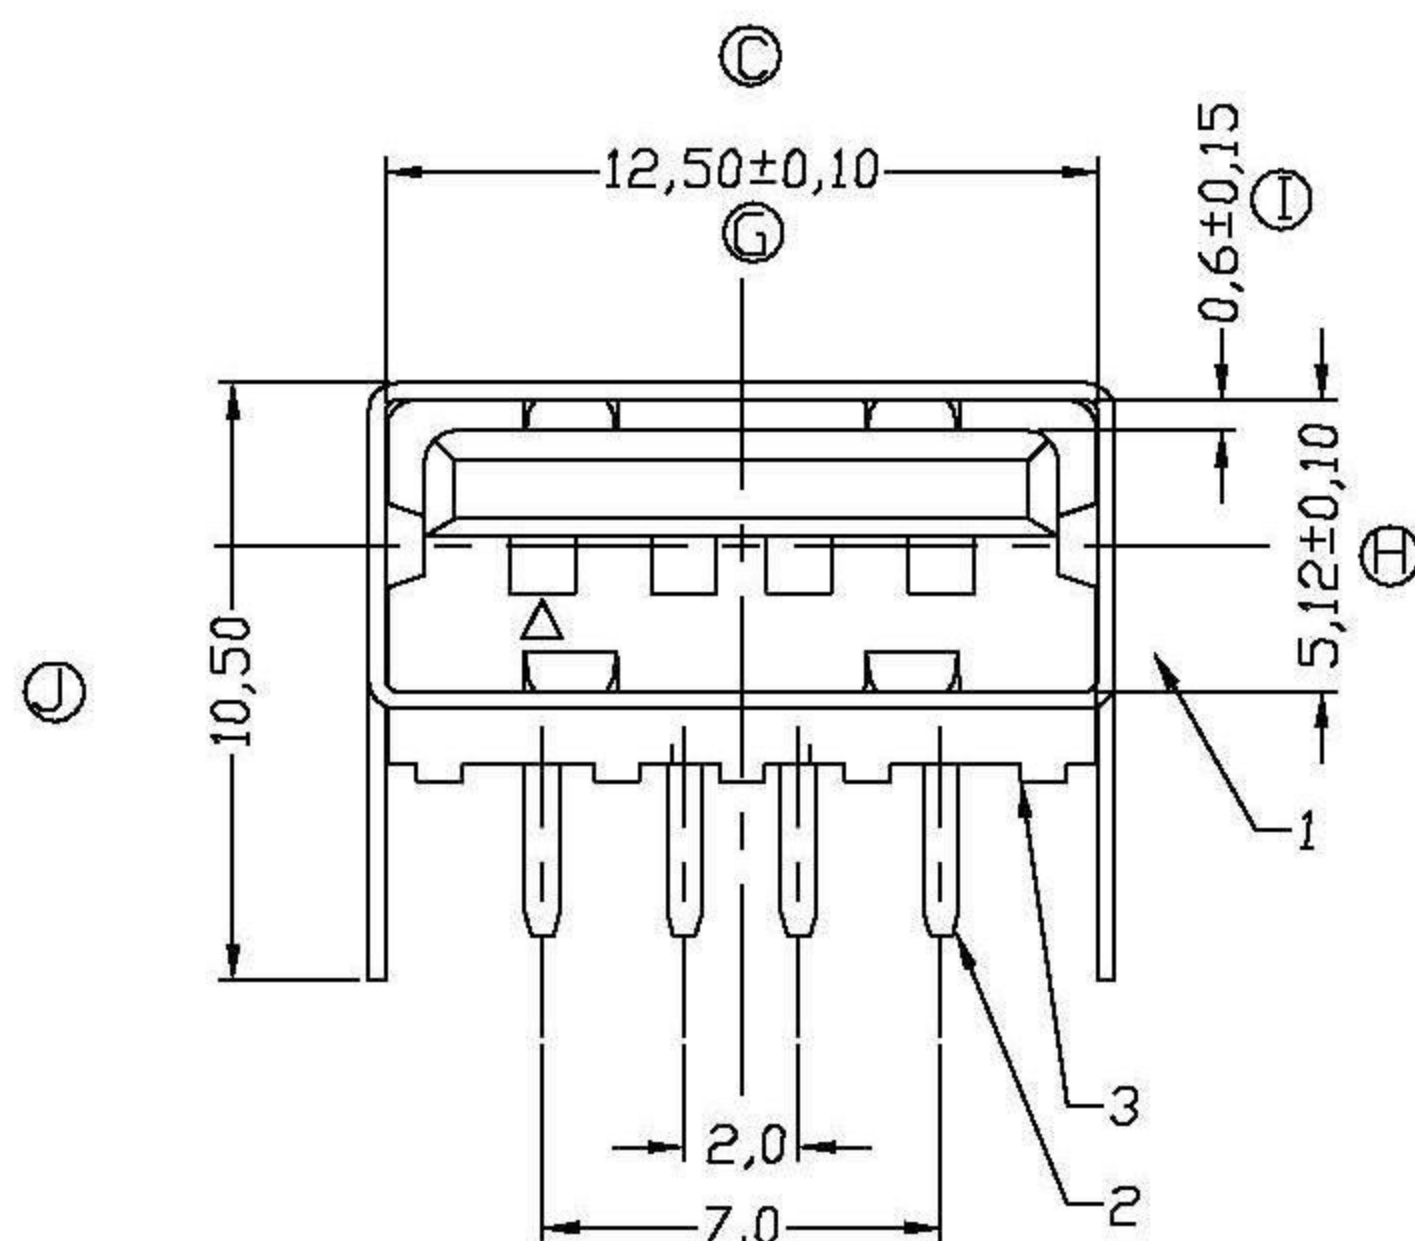
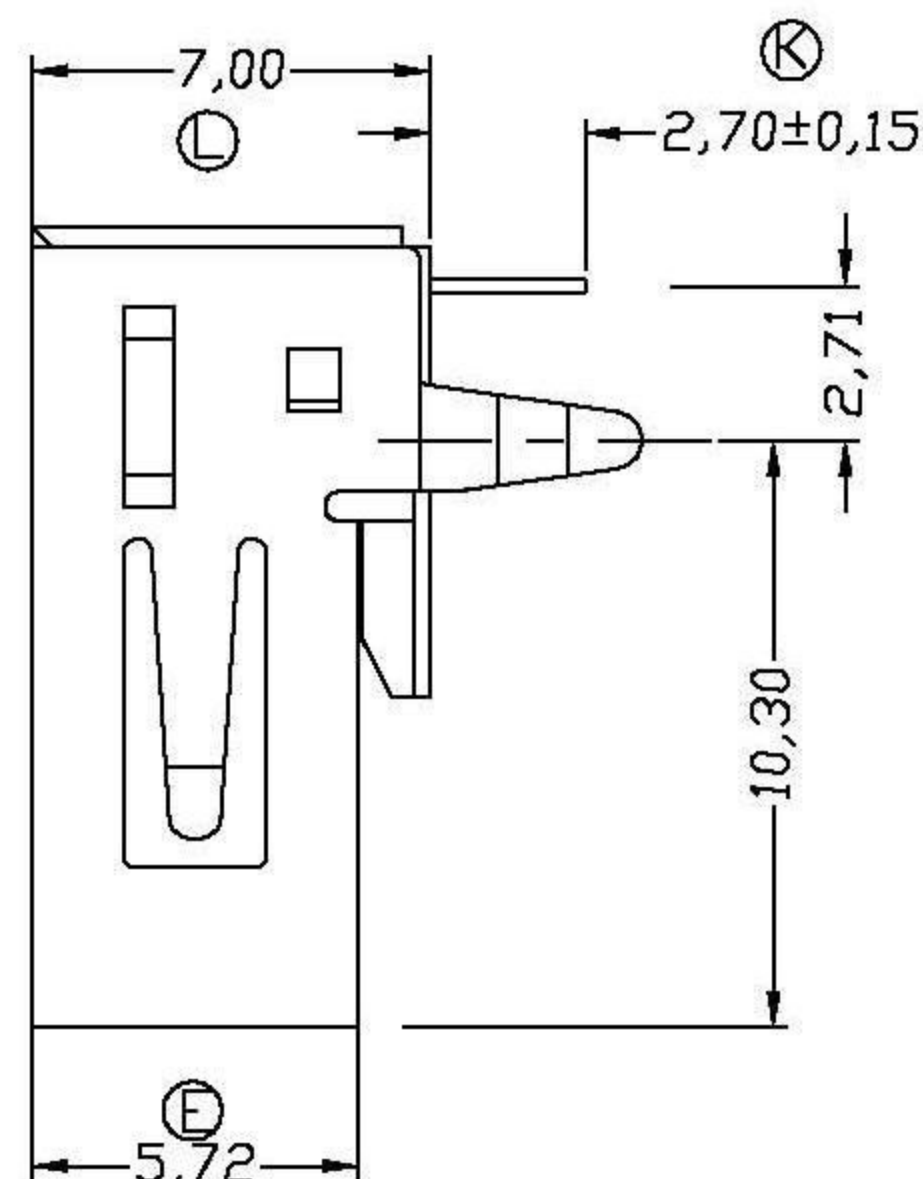


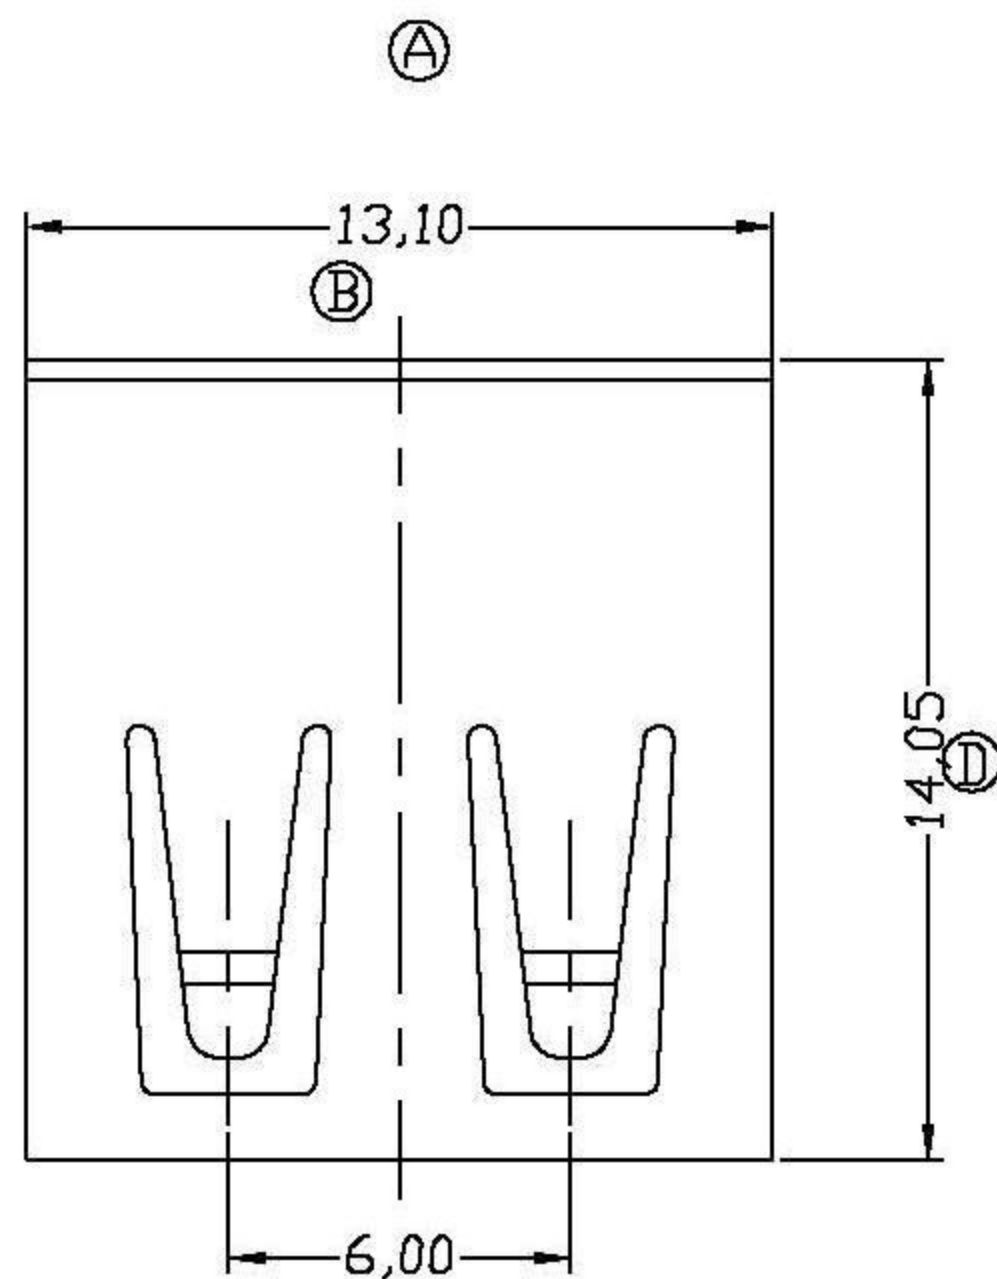

SPECIFICATIONS:

Contact current Rating:1Amperes.
DIELECTRIC Withstanding Voltage:AC 500V
at sea level
Insulation resistance:1000Megohms
Minimum.
Contact Resistance:30Miliohms Maximum
operating Temperature:-55~ ta+85~

MECHANICAL CHARACTERISTICS:

Mating Force:3.5Kg.Maximum
Unmating Force:1kg.Mlimum.

MATERIALS:

CONTACTS:Copper Alloy.
Insulator:Thermoplaste P.B.T.UL 34V-0
Rated.
Shell:Brass t=0.30±0.02

FINISHES:

Contact:GOLD
Shell:Nickel Plated.

3	胶蕊	1		PBT 30%G		COLOR: BLACK/WHITE...
2	端子	4		C5191H	NICKEL PLATED OVER ALL 120% TIN/GOLD PLATING	GOLD/1, 3, 5, 10, 15, 30u
1	外壳	1		黄铜/Fe	NICKEL PLATING	
序号	名称	数量	料号	材料	表面	备注

	1-4	2-4	3-4			一般公差 GENERAL TOL	制 图 DRAWN	ZFJ	L&X 深圳市连欣科技有限公司			张 数 SHEET	
	1-3	2-3	3-3			X 13 .X 13-1 .XX 13-2	审 核 CHECKED					单 位 UNIT	
	1-2	2-2	3-2				核 准 APPROVAL		产品名称 PRODUCT NAME	USB 2.0AF 90度插板直脚无卷边		比 例 SCALE	
	1-1	2-1	3-1			X° ±2.0° X° ±1.0° .XX° ±0.5°	角 法 PRD.		产品料号 PRT NO	10	XDUF-0241-05	图 号 DWG NO	9
版 本 REV	变 更 说 明 MODIFICATION	签 名 SIGN	时 间 DATE	审 核 CHECKED	时 间 DATE								
1	2	3	4										